


CROWN

(OK)

Gottlieb®

THE PREMIER NAME IN PINBALL

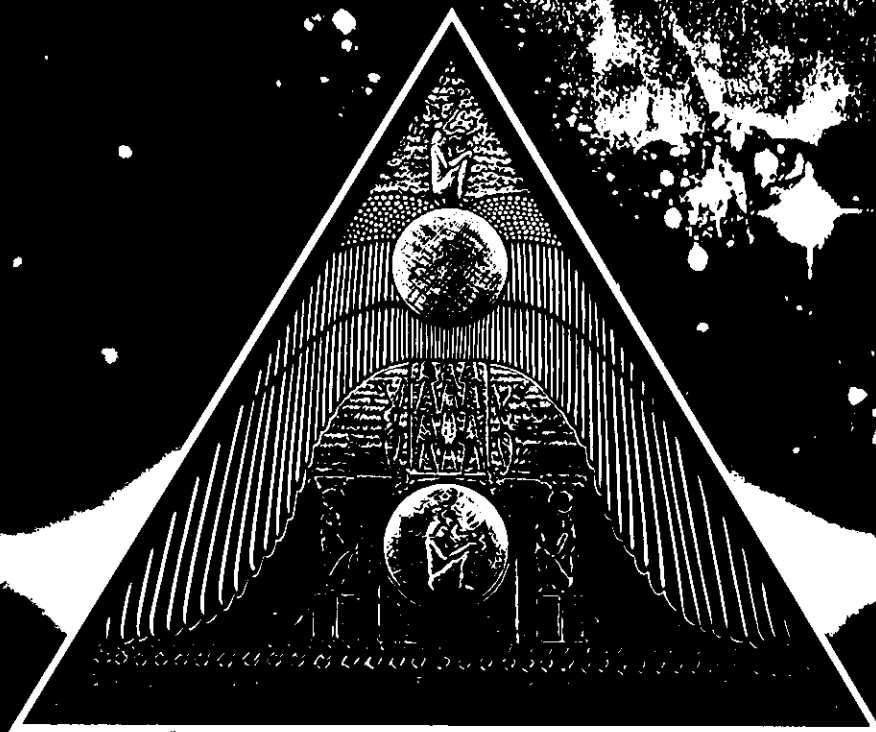

STARGATE™

STARGATE™ TM & © 1994 Le Studio Canal+ (U.S.). All Rights Reserved. TM designates a trademark of Le Studio Canal+ (U.S.).

Premier®
Technology



INSTRUCTION MANUAL

S T A R G A T E™

GAME #742

(INSTALL 4 BALLS IN OUTHOLE)

INSTRUCTION MANUAL

TABLE OF CONTENTS

SECTION	PAGE(S)
I. INSTALLATION.....	ii-1
II. GAME PLAY AND SCORING.....	2-5B
III. TEST MODE	
I. SELF-TEST.....	6-7
II. BOOKKEEPING.....	7
III. GAME ADJUSTMENTS.....	7-15
IV. UTILITIES.....	16
V. TOURNAMENT MODE.....	16-17
IV. THEORY OF OPERATION.....	17-22
V. GENERAL INFORMATION.....	24-26
VI. WIRING AND SCHEMATIC DIAGRAMS.....	27-62
VII. PARTS INFORMATION.....	63-82
TROUBLESHOOTING GUIDE.....	INSIDE BACK COVER

GAME PROM:	DISPLAY PROM:	SOUND PROM:
(TYPE 26C512)	(TYPE 27C040-25)	(TYPE 27C256)
742 / GPROM	742 / DSPROM	742 / DROM1
		742 / YROM1
		(TYPE 27C040-25)
		742 / AROM1

NOTE: ANY PROM CHANGES DURING PRODUCTION WILL BE INDICATED BY A REVISION NUMBER FOLLOWING THE GAME NUMBER. CONSULT YOUR DISTRIBUTOR FOR ANY PROM CHANGE UPDATE.

Premier®
Technology

759 INDUSTRIAL DRIVE
BENSENVILLE, IL 60106
1-708-350-0400
FAX: 1-708-350-1097

SUPPLEMENTAL ADDENDUM

ATTACH TO AND A PART OF
STARGATE (GAME #742)
INSTRUCTION MANUAL

GAME AS SHIPPED VARIES FROM THE INSTRUCTION MANUAL AS PRINTED.

CHANGED PAGE 25 AND 56

"F26" SHOULD BE 2-1/2 AMP SLO-BLO FUSE, EL-21

CHANGED PAGE 76

SPACESHIP AND BRACKET ASSEMBLY 31308 (CORRECTED PART NUMBER)

SYSTEM 3 OVERVIEW

System 3 contains many new features which improve game play and reliability. Some of these features are as follows:

- 1) New lithium battery provides data retention for a minimum of 5 years under normal operation and virtually eliminates battery leakage. Also a low battery warning is given in the displays when the voltage drops to the critical level.
- 2) New interlocking connector system for improved reliability.
- 3) Use of High Speed CMOS technology for low power consumption and cooler operation.
- 4) Improved solenoid driver reliability due to simplified circuitry and the use of Rugged Power MOSFETS.
- 5) Lamp short protection.
- 6) Switch matrix input protection.
- 7) Easy line voltage adjustment on location.
- 8) Improved bookkeeping functions.
- 9) New 128 x 32 Dot Matrix Display.
- 10) Capability for operators to enter their own messages in the attract mode.
- 11) Use of new SMART SWITCH(tm) technology which eliminates the use of contact points on switches. Therefore the need for cleaning dirty switches is eliminated.
- 12) Addition of a Tournament Mode switch which allows a quick and easy way to replace current adjustment settings with special settings. This switch also provides an easy way to set the game for free play.

This equipment has been found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

WARNING

DO NOT TRANSPORT GAME WITH LIGHTBOX IN THE UPRIGHT (PLAYING) POSITION.
USE LATCH ONLY TO TEMPORARILY HOLD LIGHTBOX UPRIGHT WHILE ATTACHING THE LIGHTBOX TO THE CABINET.
SECURE THE LIGHTBOX TO THE CABINET WITH THE TWO BOLTS AND LOCKWASHERS PROVIDED.

I. INSTALLATION

A. SET-UP

1. Bolt the legs to the cabinet.
2. Lift lightbox into an upright position. Be sure none of the cables are crimped in between the lightbox and cabinet.
3. Engage the snap in the rear of the lightbox to the cabinet.
4. To remove the lightbox backglass and gain servicing access to the electronics panel and the insert lamp assembly, proceed as follows:

UNLOCK THE LIGHTBOX BY TURNING THE KEY A QUARTER TURN CLOCKWISE.

LIFT UP THE BACKGLASS RETAINING BOTTOM TRIM ABOUT 3/4" TO CLEAR THE "H" RETAINING CHANNEL ON THE TOP EDGE OF THE DISPLAY/SPEAKER PANEL, PIVOT OUT TOWARDS YOU AND SLIDE THE BACKGLASS DOWN AND OUT, CAREFULLY SET ASIDE.

REMOVE THE "H" RETAINING CHANNEL, SLIDE THE PLEXIGLASS INSERT UP AND OUT, SLIDE UP AND REMOVE THE DISPLAY/SPEAKER PANEL AND LAY FACE DOWN ON THE CABINET.

UNLOOSEN THE TWO WING NUTS ON THE LEFT SIDE AND PUSH THE LOCK SLIDE UPWARDS, THIS ALLOWS THE LIGHTBOX LAMP INSERT TO SWING OUT AND FOR GAINING ACCESS TO THE ELECTRONICS PANEL.

5. Secure the lightbox to the cabinet with the bolts and washers provided.

TO REPLACE THE BACKGLASS, INSERT THE DISPLAY/SPEAKER PANEL, ENSURE THAT THE METAL TABS ON THE PANEL MATE INTO THE WOOD RETAINERS, SLIDE IN THE PLEXIGLASS PANEL AND INSERT THE "H" RETAINING CHANNEL.

SLIDE THE BACKGLASS UP INTO THE LIGHTBOX, PIVOT INWARDS AND SLIDE DOWN INTO THE "H" CHANNEL, TURN THE KEY A QUARTER TURN COUNTER-CLOCKWISE TO LOCK THE LIGHTBOX.

6. Open the cabinet door and loosen the front moulding locking arm.
7. Remove the front moulding from the cabinet.
8. Slide the playfield glass toward you and remove it, carefully set aside.
9. Slide the playfield toward you, pivot upwards and back towards the lightbox,

hold in place and insert the prop stick into the countersunk hole on the underside of the playfield.

CAUTION!

Use prop stick when servicing under the playfield.

10. Unravel and straighten out the power line cord located at the rear of the cabinet.
11. Proceed to "B. CHECK-OUT".

B. CHECK-OUT

1. Check that all cables are clear of moving parts.
2. Check for any loose wires.
3. Check switches for loose solder or other foreign matter.
4. Be certain all fuses are firmly seated.
5. Check transformer for any foreign matter across terminals.
6. Be sure that the Transformer Panel power input connector A12J5, corresponds to the supply voltage.
7. Check the setting of the normally open tilt switch on the underside of the playfield. One blade should be free-floating with a weight on the end.
8. The plumb-bob tilt can be adjusted by loosening the clip and raising the plumb-bob to increase its sensitivity, or lowering it to decrease its sensitivity.
9. Lower the playfield into the cabinet. Using the leg adjusters, level the playfield. At this point, the pitch of the playfield should be approximately 6 degrees.
10. Plug the line-cord into a properly grounded 3-wire receptacle ONLY!
11. Refer to Section III to make all necessary game adjustments.
12. Re-install the playfield glass, front moulding and lock the cabinet door.
13. CAUTION! If this game has been subjected to extreme cold, allow to warm up to room temperature.

I. INSTALLATION

C. COIN METER (OPTIONAL)

A +12vdc mechanical coin meter may be installed by the operator to count total coins accepted by the machine. The coin meter leads should be soldered to the lugs on the terminal strip mounted inside the front door on the right side (see Figure 1). If the coin meter is polarized, the positive lead (red) should be attached to the lug that has the cathode (banded) side of the diode attached to it otherwise the leads may be attached in any order. The COIN METER adjustment must be set to on and the following four adjustments should be set to the number of pulses (counts) required for each coin denomination used.

NOTE: Make sure that the GAME MODE adjustment is not set to either REPLAY + TICKETS or TICKETS ONLY (see Game Adjustments section).

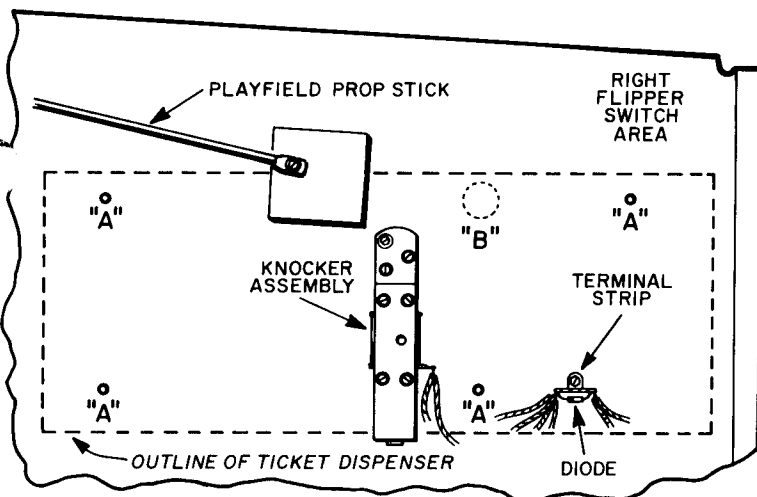


FIGURE 1.

D. TICKET DISPENSER (OPTIONAL)

This machine is equipped to easily interface to the Deltronic Labs TDOM-10-S-S ticket dispenser. To install the dispenser, first locate the five partially drilled holes on the inside of the cabinet on the right side (see Figure 1). The four "A" holes are for mounting the cabinet with #10 X 1-3/4" carriage bolts. The "B" hole is for cable access to the unit. Drill the "A" holes out from the inside of the cabinet using a 13/64"

drill bit. Drill the "B" hole out from the inside of the cabinet using a 1" drill bit. In the game envelope you will find template #30213 for a 1/2" plywood spacer to be used between the outside of the game cabinet and the dispenser cabinet so that the dispenser will clear the leg on the game when opened for loading tickets.

The GAME MODE adjustment is used to set whether to dispense a number of tickets along with each replay awarded (REPLAY + TICKETS) or to dispense a number of tickets in place of each replay awarded (TICKETS ONLY). The TICKETS TO AWARD adjustment is used to set the number of tickets to dispense for each replay awarded (see Game Adjustments section).

NOTE: Make sure that the COIN METER adjustment is set to off when using a ticket dispenser.

E. BILL ACCEPTOR (OPTIONAL)

The MARS VFM2-L1 bill acceptor can be easily interfaced to this machine. The unit can easily be mounted to the front door by removing the existing cover plate and bolting the unit to the door. There is also a connector provided on the front door which directly interfaces to the bill acceptor. The game is set at the factory to give the proper amount of credits with the bill acceptor set to output one pulse per dollar. In order to change this configuration, the GAME PRICING adjustment will need to have a CUSTOM value entered. Other bill acceptors may also be interfaced to the game but may require a different mounting or wiring configuration.

F. COMMUNICATIONS ADAPTER (OPTIONAL)

A kit (MA-1940) may be purchased through your distributor which will allow the system to output Bookkeeping data to a serial printer.

II. GAME PLAY AND SCORING

S T A R G A T E™

*** PLAYFIELD FEATURES ***

LEFT OUTSIDE ROLLOVER:

SCORE 3000.

RIGHT OUTSIDE ROLLOVER:

SCORE 3000.

AWARD SPECIAL WHEN FLASHING OUT (GAME ADJUSTMENT 61).

LEFT & RIGHT RETURN ROLLOVERS & KICKING RUBBERS:

IF PLAYER'S SCORE IS GREATER THAN OR EQUAL TO 100,000,000, THEN THE RIGHT KICKING RUBBER AND THE LEFT RETURN CLOSE THE SARCOPHAGUS GATE AND THE LEFT KICKING RUBBER AND THE RIGHT RETURN OPEN THE SARCOPHAGUS GATE (GAME ADJUSTMENT 72).

IF PLAYER'S SCORE IS LESS THAN 100,000,000, THEN THE RIGHT KICKING RUBBER AND THE LEFT RETURN OPEN THE SARCOPHAGUS GATE AND THE LEFT KICKING RUBBER AND THE RIGHT RETURN CLOSE THE SARCOPHAGUS GATE (GAME ADJUSTMENT 72).

LEFT RETURN ROLLOVER:

SCORE 30,000.

OPEN RIGHT PIVOT TARGET WHEN LIT.

RIGHT RETURN ROLLOVER:

SCORE 30,000.

OPEN LEFT PIVOT TARGET WHEN LIT.

START HORUS FLASHING OUT DURING NORMAL MODE (GAME ADJUSTMENT 58).

KICKING RUBBERS:

PERFORM THE TOGGLE FUNCTION.

SCORE 30.

LEFT SIDE ROLLOVER:

SCORE 1,000,000.

AWARD EXTRA BALL WHEN FLASHING.

OPEN SARCOPHAGUS GATE IF NOT IN ANY ROUND.

ROLLOVER DROP TARGET:

SCORE 300,000.

RESET TARGET AFTER 10 SECONDS.

AWARD PYRAMID FEATURE WHEN FLASHING.

FLASHOUT SARCOPHAGUS LAMP FOR A TIMED PERIOD DURING NORMAL MODE (GAME ADJUSTMENT 64).

LEFT DROP TARGETS (1-3):

SCORE 30,000.

SCORE CORRESPONDING VALUE IF FLASHING.

MIDDLE TARGET ADDS QUARTZ WHEN LIT.

SCORE RA'S POWER BY COMPLETING ALL TARGETS AT THE SAME TIME.

CENTER DROP TARGETS (1-2):

SCORE 300,000.

SCORE CORRESPONDING VALUE IF FLASHING.

SCORE RA'S POWER BY COMPLETING BOTH TARGETS AT THE SAME TIME.

DOUBLE SCORE WHEN LIT.

POP BUMPERS &**LEFT KICKING TARGET:**

SCORE 100,000.

START HURRY-UP WHEN COUNTER REACHES 0 (GAME ADJUSTMENT 60).

SCORE 5,000,000 DURING REBELLION ROUND.

LEFT PIVOT TARGET:

SCORE 300,000.

OPEN TARGET AND START HORUS FLASHING OUT DURING NORMAL MODE (GAME ADJUSTMENT 58).

AWARD PYRAMID FEATURE WHEN FLASHING.

II. GAME PLAY AND SCORING

SCORE 5,000,000 DURING REBELLION
ROUND.

ADD BONUS DURING SANDSTORM ROUND.

RIGHT PIVOT TARGET:

SCORE 300,000.

DURING NORMAL MODE, OPEN TARGET.

AWARD PYRAMID FEATURE WHEN FLASHING.

SCORE 5,000,000 DURING REBELLION
ROUND.

ADD BONUS DURING SANDSTORM ROUND.

CENTER KICKING TARGET:

SCORE 3,000.

ADVANCE TRANSPORTER AWARD.

DESTROY GLIDERCRAFT IN GLIDERCRAFT
ROUND AND IN STAGE 1 OF EYE OF RA
ROUND.

OUTER BULLSEYE TARGET:

SCORE 300.

DESTROY GLIDERCRAFT IN GLIDERCRAFT
ROUND AND IN STAGE 1 OF EYE OF RA
ROUND.

INNER BULLSEYE TARGET:

SCORE 500,000.

AWARD BULLSEYE SCORE.

RIGHT KICKING TARGET:

SCORE 100,000.

AWARD RA'S BRACELET SCORE WHEN
FLASHING OUT (GAME ADJUSTMENT 59).

AWARD PYRAMID FEATURE WHEN FLASHING.

SCORE 3,000,000 AND SERVE ANOTHER BALL
INTO PLAY DURING RA'S TEMPLE ROUND (UP
TO 2 BALLS MAXIMUM).

DOUBLE SCORE WHEN FLASHING OUT (GAME
ADJUSTMENT 59).

WHEN STROBING:

SCORE JACKPOT DURING MULTIBALL.
ADD BONUS DURING SANDSTORM.
SCORE 20,000,000 WHEN STROBING IN
STARGATE MULTIBALL.

TOP LEFT RAMP (OPTO):

SCORE 50,000.

FLASH OUT RIGHT KICKING TARGET WHEN
LIT (GAME ADJUSTMENT 59).

BEGIN COMBO FEATURE WHEN LIT.

AWARD PYRAMID FEATURE WHEN FLASHING.

WHEN STROBING:

SCORE JACKPOT DURING MULTIBALL.
ADD BONUS DURING SANDSTORM.
ADD 2 QUARTZ DURING QUARTZ ROUND.
SCORE 20,000,000 WHEN STROBING IN
STARGATE MULTIBALL.

TOP RIGHT RAMP (OPTO):

SCORE 3,000.

ADD LETTER TO S-T-A-R-G-A-T-E
WHEN LIT.

AWARD COMBO WHEN FLASHING.

AWARD PYRAMID FEATURE WHEN FLASHING.

WHEN STROBING:

SCORE JACKPOT DURING MULTIBALL.
ADD BONUS DURING SANDSTORM.
ADD 1 QUARTZ DURING QUARTZ ROUND.
SCORE 20,000,000 WHEN STROBING IN
STARGATE MULTIBALL.

TOP LEFT UPKICKER:

SCORE 10,000,000 AND ADVANCE HORUS
BONUS IF SKILL SHOT IS ACTIVE.

SCORE 300,000.

ADVANCE HORUS BONUS WHEN FLASHING.

AWARD TRANSPORTER AWARD WHEN LIT.

AWARD COMBO WHEN FLASHING.

AWARD PYRAMID FEATURE WHEN FLASHING.

COLLECT AND ADVANCE HORUS BONUS DURING
BATTLE ROUND. ADD TIME.

WHEN STROBING:

SCORE JACKPOT DURING MULTIBALL.
ADD BONUS DURING SANDSTORM.
SCORE 20,000,000 WHEN STROBING IN
STARGATE MULTIBALL.

II. GAME PLAY AND SCORING

TOP CENTER UPKICKER:

SCORE 300,000.

TRADE QUARTZ WHEN LIT.

AWARD COMBO WHEN FLASHING.

AWARD PYRAMID FEATURE WHEN FLASHING.

COLLECT AND ADVANCE HORUS BONUS DURING BATTLE ROUND. ADD TIME.

WHEN STROBING:

SCORE JACKPOT DURING MULTIBALL.

ADD BONUS DURING SANDSTORM.

SCORE 20,000,000 WHEN STROBING IN STARGATE MULTIBALL.

TOP RIGHT UPKICKER:

SCORE 1,000,000.

ACTIVATE SARCOPHAGUS WHEN FLASHING.

AWARD HURRY-UP WHEN FLASHING.

AWARD PYRAMID FEATURE WHEN FLASHING.

COLLECT COUNTDOWN BONUS IN SAVE SARI ROUND.

WHEN STROBING:

SCORE JACKPOT DURING MULTIBALL.

ADD BONUS DURING SANDSTORM.

SCORE 20,000,000 WHEN STROBING IN STARGATE MULTIBALL.

LOWER LEFT KICKER:

SCORE 10,000,000 IF SKILL SHOT IS ACTIVE. OTHERWISE, SCORE 100,000.

AWARD SARCOPHAGUS FEATURE IF ACTIVE.

RE-START COUNTDOWN BONUS AT 50,000,000 IF IN SAVE SARI ROUND (GAME ADJUSTMENT 65).

PYRAMID (OPTO):

SCORE 300,000.

BEGIN CURRENT ROUND WHEN FLASHING.

COMPLETE COMBO FEATURE WHEN FLASHING.

COMPLETE PYRAMID FEATURE WHEN FLASHING.

SCORE 50,000,000 DURING RA'S TEMPLE ROUND WHEN STROBING.

WHEN STROBING:

SCORE JACKPOT DURING MULTIBALL AND COLLECT SUPER JACKPOT.

ADD BONUS DURING SANDSTORM.

SCORE 20,000,000 WHEN STROBING IN STARGATE MULTIBALL.

DESTROY GLIDERCRAFT DURING STAGE 1 OF EYE OF RA ROUND.

ASSEMBLE OR COMPLETE THE BOMB IN STAGE 3 OF EYE OF RA ROUND.

LOWER RAMP (OPTO):

OPEN THE SARCOPHAGUS GATE.

OUTHOLE:

COLLECT SANDSTORM BONUS AT END OF BALL.

COLLECT QUARTZ BONUS AT END OF BALL.

COLLECT STARGATE SEGMENT BONUS AT END OF GAME.

S T A R G A T E™

*** GENERAL GAME FEATURES ***

HORUS FLASHOUT:

THIS FEATURE ESTABLISHES THE BONUS LEVELS FOR THE BATTLE ROUND. WHEN THE PLAYER HITS THE LEFT PIVOT TARGET, IT OPENS AND THE "HORUS" LAMP FLASHES OUT FOR A TIMED PERIOD (GAME ADJUSTMENT 58). IF THE PLAYER SHOOTS THE TOP LEFT UPKICKER, HE ADVANCES THE HORUS BONUS AND CLOSES THE LEFT PIVOT TARGET.

COMBO FEATURE:

SHOOTING THE LEFT RAMP WHEN LIT BEGINS THIS FEATURE. THIS AWARDS THE PLAYER ONE COMBO AND ADVANCES THE COMBO SHOT. THIS CONTINUES UNTIL THE PLAYER MISSES A SHOT (ANY WRONG SWITCH HIT).

COMPLETING THE FIFTH COMBO SHOT GIVES AN AWARD AND ENDS THIS FEATURE.

II. GAME PLAY AND SCORING

AWARD TABLE:

CONSECUTIVE COMBOS

- 1ST - 5,000,000.
- 2ND - STARGATE SEGMENT (1ST TIME ONLY) OR 10,000,000.
- 3RD - 20,000,000.
- 4TH - 30,000,000.
- 5TH - ADVANCE SUPER JACKPOT.

THRESHHOLD LEVELS:

- 10 START HURRYUP.
- 30 FLASH EXTRA BALL.
- HIGH TO DATE PLAYER INITIALS AND SPECIAL (SEE GAME ADJUSTMENT 67 AND 73).

PYRAMID FEATURE:

BEGIN WITH ONE LAMP FLASHING. THIS LAMP IS CHOSEN AT RANDOM. WHEN THE PLAYER COMPLETES THIS SHOT, THEN RANDOMLY CHOOSE ANOTHER UNTIL THE PLAYER COMPLETES THE SIXTH SHOT. FLASH THE SEVENTH SHOT WHICH WILL ALWAYS BE THE PYRAMID. COMPLETING THE SEVENTH SHOT DECODES THE STARGATE SEGMENT AND GIVES AN AWARD. HERE ARE THE AWARDS:

- 1ST - ADD 5 QUARTZ.
- 2ND - 30,000,000.
- 3RD - ADVANCE SUPER JACKPOT.

RA'S BRACELET:

IF THE PLAYER HITS THIS TARGET WHEN LIT SOLID, THEN FLASH OUT THE TARGET FOR A TIMED PERIOD (GAME ADJUSTMENT 59). IF THE PLAYER HITS THIS TARGET WHEN FLASHING OUT, THEN GIVE THE AWARD AND RE-START THE TIMER. THIS FEATURE IS NOT ACTIVE WHEN IN RA'S TEMPLE ROUND.

- 1ST - 5,000,000.
- 2ND - 10,000,000.
- 3RD - 20,000,000.

TRANSPORTER:

COLLECT THE STARGATE SEGMENT. WHEN THE PLAYER GETS AN AWARD, THAT AWARD IS ELIMINATED FROM THE TABLE. CLOSE THE LEFT PIVOT TARGET. THE PLAYER CHANGES THE AWARD BY HITTING THE CENTER KICKING TARGET. WHEN ALL AWARDS HAVE BEEN COMPLETED, THEN THE NEXT AWARD WILL BE SANDSTORM.

TABLE OF AWARDS:

- 20,000,000
- BEGIN HURRY-UP
- ADD 3 QUARTZ
- MULTIBALL
- 10,000,000
- ADD 3 QUARTZ
- ADD 5 QUARTZ
- 5,000,000
- EXTRA BALL (ONCE PER PLAYER PER GAME)
- ADVANCE SUPER JACKPOT
- 30,000,000
- TRIPLE SCORING FOR A TIME PERIOD

SOME AWARDS ARE MARKED AS ALREADY COMPLETED UPON PLAYER'S FIRST BALL.

SARCOPHAGUS:

PLAYER IS AWARDED THIS FEATURE FROM A PLUNGER SKILL SHOT OR FROM HITTING THE ROLLOVER DROP TARGET, THEN SHOOTING THE RIGHT UPKICKER BEFORE THE SARCOPHAGUS LAMP TIMES OUT (GAME ADJUSTMENT 64). DECODE STARGATE SEGMENT.

- ODD TIMES - MULTIBALL.
- EVEN TIMES - 3 QUARTZ.

HURRY-UP:

SHOOTING THE TOP RIGHT UPKICKER AWARDS THE HURRY-UP IF IT IS SHOT BEFORE TIME HAS RUN OUT (GAME ADJUSTMENT 60). THE STARGATE SEGMENT IS AWARDED ALONG WITH:

- 1ST - 10,000,000.
- 2ND - 30,000,000.
- 3RD - EXTRA BALL.
- 4TH - 50,000,000.

SPELL S-T-A-R-G-A-T-E:

SHOOTING THE TOP RIGHT RAMP WHEN LIT ADDS A LETTER TO S-T-A-R-G-A-T-E. COMPLETING S-T-A-R-G-A-T-E ALWAYS AWARDS THE STARGATE SEGMENT ALONG WITH:

- 1ST - ADD 3 QUARTZ.
- 2ND - ADVANCE SUPER JACKPOT.
- 3RD - ADD 5 QUARTZ.
- 4TH - ADVANCE SUPER JACKPOT.

II. GAME PLAY AND SCORING

BULLSEYE:

HITTING THE INNER BULLSEYE TARGET
AWARDS:

LAST BALL - 10,000,000
NEXT TO LAST BALL - 5,000,000
OTHER BALLS - 1,000,000

RA'S POWER:

COMPLETING ALL DROP TARGETS AT ONCE ON
EITHER BANK SCORES 5M, 10M, 20M, 30M,
OR 40M. EACH NEW BALL RESETS THE SCORE
VALUE.

TRADE QUARTZ:

THIS FEATURE IS NOT ACTIVE IN BATTLE
ROUND. SHOOTING THE CENTER UPKICKER
WHEN LIT ADDS 1 QUARTZ AND ALLOWS THE
PLAYER TO TRADE HIS ACCUMULATED QUARTZ
FOR VARIOUS AWARDS LISTED BELOW. THE
STARGATE SEGMENT IS ALWAYS AWARDED.

QUARTZ	ITEM OFFERED
-----	-----
1,2, OR 3	- 10,000,000.
4,5, OR 6	- 50,000,000.
7,8, OR 9	- FLASH EXTRA BALL (1 TIME ONLY), ELSE 100,000,000.
10 THRU 15	- DOUBLE ADVANCE SUPER JACKPOT.
16 THRU 19	- SANDSTORM.
20 THRU 22	- COMPLETE ALL STARGATE SEGMENTS (ALLOWED ONCE).
23 OR MORE	- SUPER JACKPOT.

PLUNGER SKILL SHOT:

SHOOTING THE SARCOFAGUS OR THE TOP
LEFT UPKICKER FROM THE PLUNGER SCORES
10,000,000. SHOOTING THE SARCOFAGUS
ALSO STARTS MULTIBALL, GLIDERCRAFT
ROUND OR AWARDS 3 QUARTZ. SHOOTING THE
TOP LEFT UPKICKER ALSO ADDS TO HORUS
BONUS.

TOGGLE FUNCTION:

ADVANCE CURRENT ROUND. TOGGLE "ENTER
ROUND" LAMP IF PLAYER HAS ACHIEVED EYE
OF RA ROUND.

SUPER JACKPOT:

SUPER JACKPOT STARTS AT 100,000,000
AND CAN BE ADVANCED BY VARIOUS
FEATURES.

MULTIBALL:

MULTIBALL CANNOT BE STARTED IF A ROUND
IS ALREADY IN PROGRESS. INSTEAD, AWARD
5 QUARTZ.

MULTIBALL DISABLES THE COMBO FEATURE,
THE PYRAMID FEATURE, THE QUARTZ TRADE
FEATURE, HURRY-UP, SPELL S-T-A-R-G-A-
T-E, SARCOFAGUS, TRANSPORTER, RA'S
BRACELET, AND THE LEFT PIVOT TARGET
HURRY-UP FEATURE. THESE FEATURES ARE
RESTORED WHEN MULTIBALL ENDS.

MULTIBALL BEGINS BY STROBING THE LEFT
PIVOT TARGET, THE RIGHT PIVOT TARGET,
AND THE RIGHT KICKING TARGET (GAME
ADJUSTMENT 68). COMPLETING A STROBING
SHOT SCORES THE JACKPOT OF 10,000,000,
ADVANCES TO THE NEXT STROBING SHOT,
AND RELEASES ANOTHER BALL INTO PLAY
UP TO A MAXIMUM OF 2 ADDITIONAL BALLS
(GAME ADJUSTMENT 69). THE LAST
STROBING SHOT IS THE PYRAMID, WHICH,
WHEN COMPLETED, AWARDS SUPER JACKPOT.
ALL OTHER STROBING SHOTS MUST BE
COMPLETED BEFORE THE PYRAMID STARTS
STROBING.

COMPLETING THE PYRAMID SHOT RESETS
THE STROBING SHOTS, BUT NOW ONLY ONE
SHOT IS ACTIVE AT A TIME. COMPLETING
THE LAST SHOT AGAIN AWARDS DOUBLE
SUPER JACKPOT.

OPEN THE SARCOFAGUS GATE WHEN
MULTIBALL ENDS.

SANDSTORM:

PUT 2 ADDITIONAL BALLS INTO PLAY AND
STROBE 7 SHOTS. COMPLETING A STROBING
SHOT ADDS 10,000,000 TO SANDSTORM
BONUS. SANDSTORM BONUS IS COLLECTED AT
THE END OF THE BALL, THEN RESET.

STARGATE MULTIBALL:

STARGATE MULTIBALL IS AWARDED FOR
COMPLETING ALL 7 SEGMENTS OF THE
STARGATE. THE PLAYER ENTERS INTO THREE
BALL MULTIBALL PLAY WITH 7 STROBING
SHOTS ACTIVE. COMPLETING A SHOT
ELIMINATES THAT SHOT AND AWARDS
20,000,000. COMPLETING ALL SEVEN SHOTS
AWARDS SUPER JACKPOT.

EYE OF RA ROUND:

SERVE ALL BALLS INTO PLAY. STAGE 1
STARTS BY SENDING OUT THE GLIDERCRAFT.
THE PLAYER MUST HIT THE CENTER KICKING
TARGET, THE BULLSEYE TARGET OR THE
PYRAMID MULTIPLE TIMES TO DESTROY THE
GLIDERCRAFT. WHEN THE GLIDERCRAFT IS

II. GAME PLAY AND SCORING

DESTROYED, STAGE 2 BEGINS BY SERVING ALL BALLS BACK INTO PLAY. THE PLAYER MUST NOW SHOOT THE TOP AND CENTER UPKICKERS TO DEFEAT THE GUARDS. THE PIVOT TARGETS OPEN AND CLOSE PERIODICALLY TO MAKE THIS MORE CHALLENGING. COMPLETING BOTH SHOTS BEGINS STAGE 3. AT THE START OF STAGE 3, THE PLAYER IS RETURNED TO 4 BALL MULTIBALL AND HIS OBJECTIVE IS TO SHOOT INTO THE PYRAMID IN ORDER TO ASSEMBLE THE BOMB. EACH SHOT INTO THE PYRAMID ADDS A PART TO THE BOMB. WHEN THE BOMB IS COMPLETED, THE PLAYER ENDS THE ROUND AND BEGINS REGULAR MULTIBALL. EYE OF RA ALSO ENDS IF THE PLAYER RETURNS TO 1 BALL IN PLAY DURING ANY STAGE. COMPLETING ANY STAGE AWARDS SUPER JACKPOT.

AWARDS DURING EYE OF RA ROUND:

STAGE 1 GLIDERCRAFT HITS - 5,000,000.

STAGE 2 PIVOT TARGETS - 10,000,000.

STAGE 2 STROBING UPKICKERS - 20M.

STAGE 3 PIECE OF BOMB = 30,000,000

STAGE 3 DETONATION = SUPER JACKPOT

ROUNDS

ONCE THE FIRST SIX ROUNDS HAVE BEEN PLAYED, THE PLAYER CAN ENTER THE EYE OF RA ROUND BY SHOOTING THE PYRAMID WHEN FLASHING.

SAVE SARI ROUND:

PLAYER STARTS WITH A COUNTDOWN BONUS OF 30,000,000. THE PLAYER MUST SHOOT THE TOP RIGHT UPKICKER BEFORE THE BONUS REACHES 10,000,000 IN ORDER TO COLLECT IT (GAME ADJUSTMENT 65). COLLECTING THE COUNTDOWN BONUS RESTARTS THE BONUS AT 50,000,000.

GLIDERCRAFT ROUND:

RELEASE AN ADDITIONAL BALL INTO PLAY, UP TO A MAXIMUM OF 2 ADDITIONAL BALLS (GAME ADJUSTMENT 69), FOR EACH GLIDERCRAFT HIT (CENTER KICKING TARGET OR OUTER BULLSEYE). EACH HIT SCORES:

1ST - 3RD HIT = 5,000,000.

4TH - 6TH HIT = 10,000,000.

7TH - ? HIT = 20,000,000.

BATTLE ROUND:

SHOOTING THE TOP LEFT OR TOP CENTER UPKICKERS COLLECTS AND ADVANCES THE HORUS BONUS AND ADDS TIME TO THE ROUND. THE ROUND ENDS WHEN TIME EXPIRES.

REBELLION ROUND:

SERVE ANOTHER BALL INTO PLAY. EACH POP BUMPER, LEFT KICKING TARGET OR LEFT PIVOT TARGET HIT SCORES 5,000,000. THIS ROUND LASTS UNTIL ONE BALL REMAINS IN PLAY. EACH LEFT PIVOT TARGET HIT RELEASES ANOTHER BALL INTO PLAY (GAME ADJUSTMENT 69), UP TO 2 ADDITIONAL BALLS.

QUARTZ ROUND:

SERVE ANOTHER BALL INTO PLAY. EACH RAMP SHOT AWARDS 1 QUARTZ AND RELEASES ANOTHER BALL INTO PLAY (GAME ADJUSTMENT 69), UP TO 2 ADDITIONAL BALLS. THIS ROUND LASTS UNTIL ONE BALL REMAINS IN PLAY. THE LEFT RAMP AWARDS 1 ADDITIONAL QUARTZ.

RA'S TEMPLE ROUND:

SERVE ANOTHER BALL INTO PLAY. EACH HIT ON THE RIGHT KICKING TARGET SCORES 3,000,000 AND SERVES ANOTHER BALL INTO PLAY. WHEN 2 ADDITIONAL BALLS HAVE BEEN PUT INTO PLAY, THE STROBING OF THIS SHOT STOPS AND THE PYRAMID STARTS STROBING. EACH BALL SHOT INTO THE PYRAMID SCORES 50,000,000. THIS ROUND LASTS UNTIL ONLY ONE BALL REMAINS IN PLAY.

II. GAME PLAY AND SCORING

S T A R G A T E™

*** MISCELLANEOUS NOTES ***

BEGINNING OF GAME:

INITIAL VALUE OF HORUS BONUS IS
10,000,000.

INITIAL VALUE OF QUARTZ BONUS IS
1,000,000.

BEGINNING OF BALL:

IF THE PLAYER ATTEMPTS TO DEFEAT AN
AUTOMATIC MULTIBALL BALL SERVE BY
PRESSING THE MANUAL PLUNGER IN WHILE
THE GAME TRIES TO SERVE A MULTIBALL
INTO PLAY, THEN ALL SWITCHES ARE
DISABLED UNTIL THAT BALL IS SHOT INTO
PLAY.

THE FIRST PLAYFIELD SCORING SWITCH
CLOSURE RESETS THE RODT, TURNS OFF THE
HORUS LAMP, AND CLOSSES THE LEFT PIVOT
TARGET. THE GLIDERCRAFT ROUND IS
STARTED ON THE LAST BALL IF THE PLAYER
HAS NOT YET COMPLETED THAT ROUND (GAME
ADJUSTMENT 57).

LAST BALL ONLY - THE RIGHT OUTLANE
SPECIAL FLASHES OUT FOR A TIMED PERIOD
IF THE PLAYER'S SCORE IS LESS THAN
30,000,000 (GAME ADJUSTMENT 61). IF
THE PLAYER ENTERS MULTIBALL WHILE THIS
IS FLASHING, THEN THIS FEATURE IS
CANCELLED.

IF THE PLAYER COMPLETES THE #1 DROP
TARGET ON THE 3 BANK WHEN FLASHING FOR
5,000,000 AND THE SHOT DID NOT HIT THE
SECOND TARGET, THEN AWARD 5,000,000
AND CHANGE THE FLASHING LAMP TO THE

10,000,000 TARGET. IF THE PLAYER
COMPLETES THE SECOND DROP TARGET WHEN
FLASHING FOR 10,000,000 AND THE SHOT
DID NOT HIT THE LAST TARGET, THEN
AWARD 10,000,000 AND CHANGE THE
FLASHING LAMP TO THE 20,000,000 LAMP
ON THE 3 BANK. IF THE PLAYER HITS THE
LAST DROP TARGET ON THE 3 BANK WHEN
FLASHING FOR 20,000,000, THEN AWARD
20,000,000, CHANGE THE FLASHING LAMP
TO 40,000,000 ON THE 2 BANK FOR A
TIMED PERIOD (GAME ADJUSTMENT 62), AND
RESET THE TWO BANK UNLESS BOTH TARGETS
ARE ALREADY UP. HITTING THE LEFT
TARGET ON THE 2 BANK WITHOUT HITTING
THE RIGHT TARGET WHEN THE 40,000,000
IS FLASHING AWARDS 40,000,000 AND
SWITCHES THE FLASHING OUT LAMP TO THE
RIGHT TARGET FOR A TIMED PERIOD (GAME
ADJUSTMENT 63). HITTING THE RIGHT
TARGET WHEN THE 80,000,000 IS FLASHING
AWARDS 80,000,000 AND ENDS THIS
FEATURE. HITTING ANY OF THE TARGETS ON
THE 2 BANK WHILE THERE IS A FLASHING
TARGET ON THE 3 BANK ENDS THIS
FEATURE. IF A LAMP IS FLASHING ON THE
TWO BANK AND THE PLAYER HITS A TARGET
ON THE 3 BANK, THEN THIS FEATURE IS
CANCELLED. ANY TIME TWO TARGETS ARE
HIT AT THE SAME TIME, THIS FEATURE IS
CANCELLED.

ANY TIME A PLAYER COMPLETES BOTH
OUTSIDE TARGETS ON THE 3 BANK AND
LEAVES THE MIDDLE TARGET STANDING,
THEN THE MIDDLE TARGET IS LIT FOR
ADDING 1 QUARTZ.

III. TEST MODE

There are several functions accessible to the operator while in the test mode. These functions are Self-Test, Bookkeeping, Game Adjustments, and Utilities. Each of these functions will be explained in detail later in this section. To enter the test mode, the game must be in the attract mode (game over). Then depress the Test button located just inside the front door of the game. The operator will then be given a choice as to which function he wants to access. Use the left flipper button to choose (highlight) the function desired and then either the Test button or the right flipper button to enter the chosen function.

NOTE: The Test button may be held in to fast forward through the steps of a particular function.

To exit the test mode or change functions the Slam switch (front door) must be activated or the power must be turned off.

I. SELF-TEST

This function will allow the operator to test all the hardware related devices in the game. Each test is described below. In most cases the Credit button can be used to restart each test (see Testmode Flowchart).

A. MEMORY TEST

This function tests all memory devices on the Control Board (A1). If all the devices pass the test an "OK" will be displayed. If a failure occurs, a description of the faulty component will be displayed. Then after a short period of time the Game Prom check sum will be displayed.

B. LAMP CHECK

This function will flash all the controlled lamps and flasher lamps continuously. This will allow the operator to easily check for and replace any burned out light bulbs.

C. LAMP MATRIX TEST

This test will allow an operator to single step through and check the operation of each lamp in the game. The left flipper button will

decrement the active lamp number by one while the right flipper button will increment the active lamp number by one. The strobe number and the return number are combined to form the lamp number (strobe,return) which is shown in the display along with a description of the lamp. Only one lamp at a time should flash during this test.

D. RELAY AND SOLENOID TEST

This test will allow an operator to single step through and check the operation of each relay and solenoid driver in the game. The left and right flipper buttons are used to change the active driver number. The selected driver description and number will appear in the display. The Credit button is then used to activate the driver for a short time period. Solenoid #31 ("Q" relay) is always on during this test so as to provide power to devices such as the pop bumpers and kicking rubbers (see Playboard Schematic Diagram).

E. SWITCH MATRIX TEST

The first part of this test will report any switch(s) which have not been operated in the course of the last 15 games (INOPERATIVE SWITCHES). The second part of the test will report any switch(s) which are stuck closed. If no switches are closed when this test is started, the message "ALL SWITCHES OPEN" will be displayed. If any switches are closed, the closed switch(s) name and number will continuously be displayed. The strobe number and the return number are combined to form the switch number (strobe,return). The Credit button can be used to restart this test.

F. SWITCH EDGES TEST

This test will display the name and number of any switch that is actuated. When actuating each switch, a problem exists if either no switch is shown or any switch other than the one actuated is displayed.

G. DISPLAY TEST

This test checks the operation of the 128 x 32 dot matrix display. The right flipper button is used to advance this

III. TEST MODE

test. The first two steps check the different levels of display intensity. Each block that appears on the display should be of lesser intensity than the one to the left of it. During the next four steps a diagonal pattern is stepped from left to right in the display. While in this part of the test every fourth pixel only in each row of dots should be lit. During the next eight steps another diagonal pattern is stepped from left to right in the display. While in this part of the test every eighth pixel only in each row of dots should be lit.

H. SOUND TEST

This test checks the interface lines from the Control Board (A1) to the Sound Board (A6). Every time the right flipper button is pressed, a different tone should be heard. During each tone, the sound line connection which is being tested will be shown in the display. After the tone stops the sound line which is being tested will still be kept at a low level (<.8v) until the right flipper button is pressed again or the Credit button is used to restart the test.

J. FRONT DOOR TEST

This test checks the operation of the coin chutes used in the game. Utilizing this function will not affect any bookkeeping values. Each coin chute closure is categorized and shown in the display.

K. AUXILIARY DRIVER TEST

This test will allow the operator to single step through and check the operation of each driver transistor on the Auxiliary Driver Board (A11). The left and right flipper buttons are used to change the active driver number. The selected driver description and number will appear in the lower display. The Credit button is then used to activate the driver for a short time period.

II. BOOKKEEPING

The Test button is used to step through bookkeeping. The display will contain a description of each step,

the step number, and two different bookkeeping values. The value in the leftmost column represents long term bookkeeping. The value in the rightmost column (in brackets) represents short term bookkeeping. These two values are provided so that the operator may compare recent performance with long term performance and then make any necessary game adjustments.

NOTE: The left column of steps 1 (earnings) and 17-20 (coin chute counts) will not be displayed unless the credit button is pressed during that active step number.

The left flipper button will allow the operator to reset all of the left (long term) and right (short term) bookkeeping values. The right flipper button will allow the operator to reset all of the right (short term) bookkeeping values only. If the R.BOOK AUTO-RESET adjustment is on, the right (short term) bookkeeping will automatically be reset after every 2000 plays (see Game Adjustments). Therefore, the operator does not need to reset the short term bookkeeping himself unless he prefers to follow his own procedure. Also, this feature will aid in adjusting the game payout percentage to the caliber of players in different locations. If there happens to be a major error in a long term bookkeeping value the word ERROR will appear to the right of that bookkeeping value. To correct this error the long term bookkeeping must be reset. A description of each bookkeeping step is given in the test mode flowchart.

III. GAME ADJUSTMENTS

This function allows the operator to make any adjustments to his game as necessary.

A. FACTORY SETTINGS

Upon entering the game adjustment section of bookkeeping, the operator is given a choice to load all factory settings or to single step through the game adjustments and adjust each section individually. If he chooses

III. TEST MODE

to enter the factory settings by depressing the Credit button, he will also be given a choice of what language to load. By using the right flipper button he may choose the appropriate language and then depress the Credit button again to enter the settings. After the settings are loaded the display should show the message "FACTORY SETTINGS LOADED" for a short time and then proceed to game adjustment step 1. At any time during the previous steps the operator may either exit the test mode or depress the Test button to proceed immediately to game adjustment step 1.

WARNING

Loading the factory settings will affect all previous game adjustment settings. Therefore be careful when selecting this feature.

B. GAME ADJUSTMENT STEPS

Each time the Test button is pressed a description of the next step appears in the display along with the step number and the current status of that step. Unless otherwise specified, the left and right flipper buttons are used to change the possible selections in each step.

- 1) SCORE REPLAY LEVEL 1
- 2) SCORE REPLAY LEVEL 2
- 3) SCORE REPLAY LEVEL 3

Each Score Replay Level may be set by using the left flipper button to decrement the score and the right flipper button to increment the score. The Credit button can be used to load the factory setting for each individual level if desired. If the Auto-Percentaging adjustment is on, Replay Levels 2 & 3 can only be set to on or off. If Replay Level 2 is on, the score level will be set to two times Replay Level 1. If Replay Level 3 is on, the score level will be set to three times Replay Level 1. This allows the operator several combinations of levels in the Auto-Percentaging mode (i.e. 1, 1 & 2, 1 & 3, or 1 & 2 & 3).

- 4) HIGH GAME TO DATE 1
- 5) HIGH GAME TO DATE 2
- 6) HIGH GAME TO DATE 3

- 7) HIGH GAME TO DATE 4

- 8) HIGH GAME TO DATE 5

Each High Game To Date may be set by using the left flipper button to decrement the score and the right flipper button to increment the score. The Credit button can be used to load the factory setting for the displayed level and all those below it.

- 9) GAME PRICING

This step provides a choice of loading a standard setting for a particular country or a custom setting. When a standard setting is selected, the following steps (10-17) are skipped.

- 10) CHUTE 1 UNITS (L)

- 11) CHUTE 2 UNITS (R)

- 12) CHUTE 3 UNITS (C)

- 13) CHUTE 4 UNITS

- 14) UNITS REQUIRED FOR CREDIT

- 15) UNITS REQUIRED FOR BONUS

- 16) BONUS CREDITS

- 17) MINIMUM UNITS REQUIRED FOR CREDIT

Steps 10-17 are used if a custom setting is selected in step 9 (GAME PRICING). Steps 10-13 select the number of units that each chute is worth when a coin is dropped into that particular chute. The value entered for step 14 determines how many units must be accumulated for a credit to be issued on the game. Steps 15 and 16 determine how many units must be accumulated for any bonus credits to be issued. A value of zero entered for step 15 will disable the bonus feature. Step 17 indicates the number of units required before any credits are issued (see Coin Chute Setting Table for examples).

- 18) COIN METER

If set to ON, the pulses to be given for each of the four coin chutes can be defined so that the number of pulses for a given chute are in relation to the currency denomination. If set to OFF, steps 19-22 will be skipped.

- 19) CHUTE 1 PULSES

- 20) CHUTE 2 PULSES

- 21) CHUTE 3 PULSES

- 22) CHUTE 4 PULSES

The four steps above are used to set

III. TEST MODE

COIN CHUTE SETTING TABLE

Country		Coin Chutes				Plays/Coin(s)	Chute Adjustment Steps							
		Left 1	Right 2	Center 3	4		10	11	12	13	14	15	16	17
USA		.25	.25	\$1		1/.50, 2/\$1	01	01	04	00	02	00	00	00
USA (Custom)						1/.50, 5/\$2	01	01	04	00	02	08	01	00
						1/.50, 2/.75, 3/\$1	03	03	12	00	04	00	00	00
						1/.50, 3/\$1	01	01	04	00	02	04	01	00
						1/.25, 4/\$1	01	01	04	00	01	00	00	00
Australia	1	.20	\$1	\$2	-	1/3x.20, 2/\$1, 5/\$2	02	10	20	00	05	20	01	00
	2	.20	\$1	\$2	-	1/5x.20, 1/\$1, 3/\$2	01	05	10	00	05	10	01	00
	3	.20	\$1	\$2	-	1/5x.20, 1/\$1, 2/\$2	01	05	10	00	05	00	00	00
Belgium		5Fr	20Fr	50Fr	-	1/20Fr, 2/40Fr, 3/50Fr	01	04	10	00	04	10	01	00
Canada		.25	\$1	-	-	1/.50, 2/\$1	01	04	00	00	02	00	00	00
Denmark		1Kr	10Kr	-	-	1/3x1Kr, 4/10 Kroner	01	10	00	00	03	10	01	00
Finland		5Mka	1Mka	-	-	1/3x1 Markka, 2/5 Markkaa	10	02	00	00	05	00	00	00
France	1	1Fr	5Fr	10Fr	20Fr	1/3x1Fr, 2/5Fr, 5/10Fr	02	10	20	40	05	20	01	00
	2	1Fr	5Fr	10Fr	20Fr	2/5Fr, 4/10Fr, 9/20Fr	02	10	20	40	05	40	01	10
	3	1Fr	5Fr	10Fr	20Fr	1/5Fr, 3/10Fr, 7/20Fr	03	15	30	60	10	60	01	15
Germany	1	5DM	2DM	1DM	-	1/1DM, 2/2DM, 6/5 D-Mark	05	02	01	00	01	05	01	00
	2	5DM	2DM	1DM	-	1/2DM, 2/3DM, 3/4DM, 5/5DM	20	08	04	00	05	20	01	00
	3	5DM	2DM	1DM	-	1/2DM, 3/5DM	05	02	01	00	02	05	01	00
Greece		50D	50D	-	-	1/100 Drachma	01	01	00	00	02	00	00	00
Hungary		20F	20F	-	-	1/20 Forint	01	01	00	00	01	00	00	00
Italy		500L	500L	-	-	1/2x500L, 2/3x500L, 3/4x500L	03	03	00	00	04	00	00	00
Japan		100Y	100Y	-	-	1/100 Yen, 3/2x100 Yen	01	01	00	00	01	02	01	00
New Zealand		\$1	\$2	-	-	1/\$1, 3/\$2	01	02	00	00	01	02	01	00
Norway	1	5Kr	10Kr	20Kr	-	1/5Kr, 2/10Kr, 4/20Kr	01	02	04	00	01	00	00	00
	2	5Kr	10Kr	20Kr	-	1/10Kr, 3/20 Kroner	01	02	04	00	02	04	01	00
Singapore	1	-	.50	Token	-	1/.50 or 1/Token	00	01	01	00	01	00	00	00
	2	.20	-	-	-	1/2x.20	01	00	00	00	02	00	00	00
Spain		500P	100P	-	-	1/100P, 6/500 Pesetas	05	01	00	00	01	05	01	00
Sweden		10Kr	5Kr	-	1Kr	1/5x1Kr, 1/5Kr, 2/10Kr	10	05	00	01	05	00	00	00
Switzerland		1Fr	5Fr	2Fr	-	1/1Fr, 3/2Fr, 7/5 Francs	01	07	03	00	01	00	00	00
United Kingdom	1	1f	50P	20P	10P	1/3x10P, 2/50P, 4/1 Pound								
	2	1f	50P	20P	10P	1/50P, 3/1 Pound								
Universal		-	-	-	-	1/1 Coin	01	01	00	00	01	00	00	00

III. TEST MODE

the number of pulses to be issued for each of the four coin chutes.

23) COIN DOOR TYPE

This step provides a choice of loading a standard setting for a particular country or a custom setting. When a standard setting is selected, the following steps (24-28) are skipped.

24) COLLECTION TEXT

25) CHUTE 1 VALUE

26) CHUTE 2 VALUE

27) CHUTE 3 VALUE

28) CHUTE 4 VALUE

Step 24 is used to enter the name of the currency in use. The remaining four steps are used to set the monetary value of each coin chute.

29) GAME BUY-IN BONUS

At the end of a game, if enabled, a 10-second timer is initialized allowing each player that participated in the previous game a chance to purchase 1 credit for either 1 or 2 coins.

30) EXTENDED PLAY

At the end of a player's last ball in play, if enabled, a 10-second timer is initialized allowing the player to continue playing his current game by inserting either 1 or 2 coins for one extra ball.

31) EXTENDED PLAY MAXIMUM

This step sets the maximum number of extra balls a player may purchase in any one game when the EXTENDED PLAY feature is enabled. In a multiple player game, each player can only purchase one ball so this step will have no effect.

32) EXTENDED PLAY CHUTE(S)

This step sets which coin chute(s) will be enabled toward purchasing a game if step 29 is enabled and/or an extra ball if step 30 is enabled. A coin dropped in any other chute will be used toward purchasing a new game.

33) GAME PERCENT PAYOUT

This step is used to set the game payout percentage used when the Auto-Percentaging adjustment is on. The value entered for this step is compared to the value calculated by

dividing total replays by total plays (see Bookkeeping section). Total replays include all replays won from beating the score replay level, achieving a new high game to date, winning a playfield special, and all match replays.

When the GAME MODE adjustment is set to Add a Ball this setting refers to extra ball percentage rather than replay percentage. The value entered in this case will be compared to the value calculated by dividing total extra balls won by total plays (see Bookkeeping section).

34) MATCH PERCENT PAYOUT

This step is used to set the match payout percentage. If this step is set to zero, the match will be disabled.

NOTE: The MATCH PERCENT PAYOUT value is included in the value entered for GAME PERCENT PAYOUT (step #33). Therefore in order to retain the same payout percentage for the other payout features in the game such as score level replays, the GAME PERCENT PAYOUT will be automatically adjusted by the same amount as this step when changed.

35) HIGH GAME REPLAYS

This step is used to set the number of replays to award when the highest game to date has been beaten.

36) MAXIMUM CREDITS

This step sets the maximum number of credits allowed on the game.

37) TILT WARNINGS

This step sets the number of tilts allowed before the current player's ball in play is terminated.

38) BALLS PER GAME

This step sets the number of balls per game to 1-5.

39) GAME MODE

This step allows the game to be played in Replay, Replay + Tickets, Tickets Only, Add a Ball, or Novelty mode. In Replay mode all Specials and replays are allowed. Replay + Tickets mode is the same as Replay mode with the addition of one or more tickets to be issued (TICKETS TO AWARD) along

NOTE:

THE TEST MODE CAN ONLY BE ACCESSED DURING THE ATTRACT MODE (GAME OVER).

THE TEST MODE MAY BE EXITED BY EITHER ACTUATING THE SLAM SWITCH ON THE FRONT DOOR OR TURNING THE POWER OFF.

TEST MODE

T

STEP TO NEXT ITEM

R or T

SELECT

MAIN MENU

→

BOOKKEEPING

→

GAME ADJUSTMENTS

→

SELF-TEST

→

UTILITIES

GAME ADJUSTMENTS

UTILITIES

BOOKKEEPING

SELF-TEST

STEP TO NEXT ITEM

SELECT OR CHANGE

PRINT SETUP

PRINT

GAME ID NO.

BURN-IN

T

NEXT STEP

L

RESET LEFT AND <RIGHT> VALUES

R

RESET <RIGHT> VALUES ONLY

(a) = LEFT VALUES CAN BE DISPLAYED BY PRESSING THE CREDIT BUTTON.

MEMORY TEST

(also displays check-sum)

C

RESTART TEST

LAMP CHECK

C

RESTART TEST

LAMP MATRIX TEST

C

RESTART TEST

L

PREVIOUS LAMP

R

NEXT LAMP

RELAY AND SOLENOID TEST

C

ACTIVATE DRIVER

L

PREVIOUS DRIVER

R

NEXT DRIVER

SWITCH MATRIX TEST

CHOOSE FUNCTION

LOAD FACTORY DEFAULTS ?

ENGLISH OR GERMAN OR FRENCH ?

LOAD DEFAULT VALUES

CHANGE LANGUAGE

T NEXT STEP

L CHANGE ADJUSTMENT

R CHANGE ADJUSTMENT

C SET TO FACTORY DEFAULT
(Applies only to steps below that are followed by an asterisk *)

STEP

- 1) FIRST REPLAY LEVEL *
- 2) SECOND REPLAY LEVEL *
- 3) THIRD REPLAY LEVEL *
- 4) HIGHEST GAME TO DATE *
- 5) HIGH GAME TO DATE 2 *
- 6) HIGH GAME TO DATE 3 *
- 7) HIGH GAME TO DATE 4 *
- 8) HIGH GAME TO DATE 5 *
- 9) GAME PRICING

Steps 10-17 are skipped
If GAME PRICING is not set to CUSTOM.

- 10) <L> CHUTE 1 UNITS
- 11) <R> CHUTE 2 UNITS
- 12) <C> CHUTE 3 UNITS
- 13) CHUTE 4 UNITS
- 14) UNITS/CREDIT
- 15) UNITS/BONUS CREDIT
- 16) BONUS CREDITS
- 17) MINIMUM UNITS
- 18) COIN METER

Steps 19-22 are skipped
If COIN METER is off.

- 19) CHUTE 1 PULSES
- 20) CHUTE 2 PULSES
- 21) CHUTE 3 PULSES
- 22) CHUTE 4 PULSES


LEGEND

T PRESS TEST BUTTON

- 22) CHUTE 4 PULSES
- 23) COIN DOOR TYPE
- Steps 24-28 are skipped if COIN DOOR TYPE is not set to CUSTOM.
- 24) COLLECTION TEXT
- 25) CHUTE 1 VALUE
- 26) CHUTE 2 VALUE
- 27) CHUTE 3 VALUE
- 28) CHUTE 4 VALUE
- 29) GAME BUY-IN BONUS
- 30) EXTENDED PLAY
- 31) EXTENDED PLAY MAXIMUM
- 32) EXTENDED PLAY CHUTE(S)
- 33) GAME PERCENT PAYOUT
- 34) MATCH PERCENT PAYOUT
- 35) HIGH GAME REPLAYS
- 36) MAXIMUM CREDITS
- 37) TILT WARNINGS
- 38) BALLS PER GAME
- 39) GAME MODE
- 40) TICKETS TO AWARD
- 41) LANGUAGE
- 42) AUTO PERCENTAGING
- 43) REPLAY LIMIT
- 44) HIGH GAMES 2-5
- 45) ATTRACT SOUND
- 46) ATTRACT MESSAGE 1
- Use the credit button to enter a message.
- 47) ATTRACT MESSAGE 2
- 48) RIGHT BOOK AUTO-RESET
- 49) PLAYFIELD SPECIAL
- 50) REPLAY LEVEL BOOST
- 51) GAME RESTART
- 52) GAME INACTIVITY TIMER
- 53) HIGH GAMES RESET
- 54) PRINT BOOK RESET
- 55) GAME DIFFICULTY
- 56) ROUND TIMING
- 57) AUTO GLIDERCRAFT RND
- 58) HORUS TIME
- 59) RA'S BRACELET TIME
- 60) HURRY-UP TIME
- 61) SPECIAL TIME
- 62) 40,000,000 TIME
- 63) 80,000,000 TIME
- 64) SARCOPHAGUS TIME
- 65) SARI COUNTDOWN RATE
- 66) AUTO-SKILL
- 67) HIGH COMBOS TO DATE *
- 68) MULTIBALL FEATURE
- 69) ADD-A-MULTIBALL
- 70) REDUCED SCORING
- 71) BALL TIME SAFETY
- 72) BALL GATE
- 73) HIGH COMBOS SPECIAL
- 74) MINIMUM GAME TIME

- PRESS CREDIT BUTTON
- PRESS LEFT FLIPPER BUTTON
- PRESS RIGHT FLIPPER BUTTON

- 31) 400M-499.9M SCORES
- 32) 450M-499.9M SCORES
- 33) 500M-599.9M SCORES
- 34) 600M+ SCORES
- 35) FIRST REPLAY LEVEL
- 36) HIGHEST GAME TO DATE
- 37) 1-15 SEC. BALL TIME
- 38) 16-30 SEC. BALL TIME
- 39) 31-45 SEC. BALL TIME
- 40) 46-60 SEC. BALL TIME
- 41) 61 SEC.+ BALL TIME
- 42) 1/2 L OUTLANE DRAINS
- 43) 1/2 R OUTLANE DRAINS
- 44) BATTLE ROUNDS
- 45) BATTLE BONUS COLLECT
- 46) GLIDERCRAFT ROUNDS
- 47) GLIDERCRAFT HITS
- 48) REBELLION ROUNDS
- 49) REBELLION HITS
- 50) RA'S TEMPLE ROUNDS
- 51) RA'S TEMPLE (TARGET)
- 52) RA'S TEMPLE (PYRAMID)
- 53) QUARTZ ROUNDS
- 54) TOTAL QUARTZ ADDED
- 55) SAVE SARI ROUNDS
- 56) FIRST SARI BONUS WON
- 57) MULTIBALL
- 58) MULTIBALL JACKPOTS
- 59) STARGATE MULTIBALL
- 60) STARGATE JACKPOTS
- 61) SANDSTORM
- 62) SANDSTORM JACKPOTS
- 63) EYE OF RA - STAGE 1
- 64) EYE OF RA - STAGE 2
- 65) EYE OF RA - STAGE 3
- 66) HIGH COMBO SPECIALS
- 67) HURRY-UP SPECIALS
- 68) TRANSPORTER EB'S
- 69) HURRY-UP EXTRA BALLS
- 70) MIN TIME EXTRA BALLS
- 71) ROLLOVER EXTRA BALLS
- 72) PYRAMIDS COMPLETED
- 73) SARCOPHAGUS SKILLSHOT
- 74) ADVANCE SUPER JACKPOT
- 75) SUPER JACKPOTS WON
- 76) ADD COMBOS
- 77) 80M AWARDS
- 78) 3-BANK ADD QUARTZ
- 79) RA'S POWER AWARDS
- 80) RA'S BRACELET AWARDS
- 81) TRANSPORTER AWARDS
- 82) ENTERED QUARTZ TRADE
- 83) GLIDERCRAFT ABORT
- 84) BALL GATE ABORT
- 85) MISSING BALL COUNT

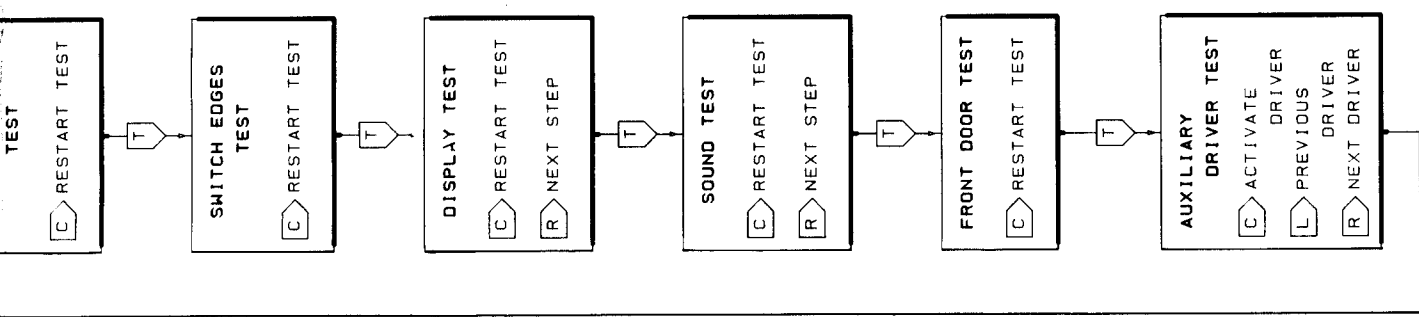

III. TEST MODE

with each replay. In Tickets Only mode one or more tickets will be issued in place of each replay won. In Add a Ball mode all Score Level Replays and Playfield Specials award an extra ball in place of a replay. Also the Match and High Game To Date awards are disabled. However, after the Add a Ball mode is selected, the PLAYFIELD SPECIAL, MATCH PERCENT PAYOUT, and HIGH GAME REPLAYS adjustments may be individually set to whatever setting may be desired. In Novelty mode all Specials award 200,000,000 points, Extra Balls award 100,000,000 points and the Score Replay Levels, Match, and High Game to Date awards are disabled.

NOTE: If either the Replay + Tickets or Tickets Only setting is selected do not set the COIN METER setting to on.

40) TICKETS TO AWARD

This step allows the operator to set the number of tickets to award when a replay has been won. This setting will only apply when the GAME MODE is set to either Replay + Tickets, or Tickets Only.

41) LANGUAGE

This step allows the Test Mode steps to be displayed in English, German, or French.

42) AUTO-PERCENTAGING

If this step is set to on, the Score Replay Levels will be adjusted periodically so that the Game Percent Payout setting will match the actual Replay Percentage displayed in Bookkeeping.

NOTE: If the GAME MODE is set to Add a Ball, the Extra Ball Percentage in bookkeeping is used in place of the Replay Percentage.

43) REPLAY LIMIT

This step may be set to no limit or one per player per game.

44) HIGH GAMES 2-5

This step will determine if High Games to Date (2-5) will be saved or erased when power is turned off.

45) ATTRACT SOUND

This step determines whether or not sounds are enabled during the attract mode (game over).

46) ATTRACT MESSAGE 1

This step is used to enter, enable, or disable an operator message. The message is permanently stored in memory and will be periodically displayed during the attract mode (game over). To enter a message press the Credit button. The current message will be displayed and the cursor position will be indicated by the flashing character. If the current position is blank, a flashing directional arrow will appear. This type of arrow will indicate which direction the cursor will move if the Credit button is pressed. The characters are chosen using the left and right flipper buttons and then entered into memory by pressing the Credit button.

47) ATTRACT MESSAGE 2

This step is used to enter, enable, or disable a second operator message. See step 43 above for details. When both messages are enabled they will be displayed consecutively.

48) RIGHT BOOKKEEPING AUTO-RESET

If this step is set to on, all the short term bookkeeping steps (in brackets) will reset after 2000 plays. Otherwise they will not reset until 10,000 games have been played on the machine.

49) PLAYFIELD SPECIAL

When a playfield special is won, either a replay or an extra ball is awarded to the player based on the setting of this step.

50) REPLAY LEVEL BOOST

This step may be set anywhere from 0 to 990,000,000 in increments of 10,000,000. If set to zero, the boost is disabled. Otherwise the Replay Level will be increased by the boost value after completing a game where a player has won a replay and his skill level has been determined to be above average. The Replay Level will return back to its base level once all of the replays won have been played.

III. TEST MODE

51) GAME RESTART

This step is used to enable or disable the credit button from starting a new game while currently in a game. If set to ON, a new game will begin when the credit button is pressed if there are any remaining credits. If set to OFF, a new game cannot be started until the current game has ended.

52) GAME INACTIVITY TIMER

This timer can be used to cause a game to go to game over automatically if there is no activity on the playfield for a specified time period. This period can be set from one to nine minutes. Setting this step to zero disables the timer.

53) HIGH GAMES RESET

All the high games to date will reset back to their factory settings automatically when the set number of plays is reached. This step can be set from 100 to 9900 plays. If set to 0 (disabled), the high games can only be reset by hand.

54) PRINT BOOK RESET

If this step is set to on, all the short term bookkeeping steps (in brackets) will reset automatically after any printout of bookkeeping data has finished.

OPERATOR ADJUSTMENT SETTINGS
(*** = ENGLISH & GERMAN FACTORY DEFAULT SETTING)
(** = FRENCH FACTORY DEFAULT SETTING)

55) GAME DIFFICULTY

THE ADJUSTMENTS LISTED IN THE TABLE BELOW ARE AUTOMATICALLY SET AS INDICATED IN THE TABLE UNLESS FINE-TUNE IS SELECTED USING THE RIGHT FLIPPER BUTTON. IF FINE-TUNE IS SELECTED, EACH STEP IN THE TABLE CAN BE ADJUSTED INDIVIDUALLY. OTHERWISE, THESE STEPS ARE SKIPPED. WHEN FINE-TUNE IS SELECTED, ALL SETTINGS REVERT BACK TO THE FACTORY DEFAULT SETTINGS AS SHOWN IN THE TABLE BELOW.

STEP		(GER.)					(FR.)	
		(ENG.)					*** **	
55	GAME DIFFICULTY	VERY EASY	EASY	MEDIUM	HARD	VERY HARD		
56	ROUND TIMING	VERY EASY	EASY	MEDIUM	HARD	VERY HARD		
57	AUTO GLIDERCRAFT ROUND	ON	ON	ON	OFF	OFF		
58	HORUS TIME	EASY	EASY	MEDIUM	MEDIUM	HARD		
59	RA'S BRACELET TIME	EASY	EASY	MEDIUM	MEDIUM	HARD		
60	HURRY-UP TIME	EASY	EASY	MEDIUM	MEDIUM	HARD		
61	SPECIAL TIME	EASY	EASY	MEDIUM	HARD	HARD		
62	40,000,000 TIME	EASY	EASY	MEDIUM	MEDIUM	HARD		
63	80,000,000 TIME	EASY	EASY	MEDIUM	MEDIUM	HARD		
64	SARCOPHAGUS TIME	EASY	EASY	MEDIUM	MEDIUM	HARD		
65	SARI COUNTDOWN RATE	EASY	EASY	EASY	HARD	HARD		

56) ROUND TIMING

Controls how fast a round times out.

VERY EASY = Slowest
EASY = Slow
*** MEDIUM = Average
** HARD = Faster
VERY HARD = Fastest

59) RA'S BRACELET TIME

Determines how much time the player gets for the Ra's bracelet flash out feature.

EASY = 10 time units.
*** MEDIUM = 5 time units.
HARD = 3 time units.

57) AUTO GLIDERCRAFT ROUND

Determines whether or not a player goes into the glidercraft round upon his first scoring switch closure on the last ball in play.

** OFF = NO
*** ON = YES

60) HURRY-UP TIME

Determines how much time the player gets for the hurry-up flash out feature.

EASY = 20 time units.
*** MEDIUM = 15 time units.
HARD = 10 time units.

58) HORUS TIME

Determines how much time the player gets for the Horus flash out feature.

EASY = 30 time units.
*** MEDIUM = 20 time units.
HARD = 10 time units.

61) SPECIAL TIME

Determines how much time the player gets for the special flash out feature.

EASY = 20 time units.
*** MEDIUM = 15 time units.
** HARD = 10 time units.

III. TEST MODE

62) 40,000,000 TIME

Determines how much time the player gets for the 40,000,000 flash out feature.

EASY = 15 time units.

*** MEDIUM = 10 time units.

HARD = 5 time units.

63) 80,000,000 TIME

Determines how much time the player gets for the 80,000,000 flash out feature.

EASY = 15 time units.

*** MEDIUM = 10 time units.

HARD = 5 time units.

64) SARCOPHAGUS TIME

Determines how much time the player gets for the sarcophagus flash out feature.

EASY = 20 time units.

*** MEDIUM = 15 time units.

HARD = 10 time units.

65) SARI COUNTDOWN RATE

Determines how fast the Sari bonus counts down.

*** EASY = Slower.

** HARD = Faster.

66) AUTO-SKILL

Various game features become more difficult as the game recognizes a player's increased skill level.

OFF = Disabled

*** ON = Enabled

67) HIGH COMBOS TO DATE

Sets the current high combos to date value (1-99). The factory default value can be reloaded by pressing the credit button while on this step.

68) MULTIBALL FEATURE

Determines how many shots are strobed when player starts regular multiball.

*** EASY = Strobe 3 shots.

** MEDIUM = Strobe 2 shots.

HARD = Strobe 1 shot.

69) ADD-A-MULTIBALL

Determines how many additional balls can be put into play during multiball.

EASY = 2 balls.

*** MEDIUM = 1 ball.

HARD = 0 balls.

70) REDUCED SCORING

Controls whether the game scores using regular or reduced score values.

*** OFF = Regular scoring.

ON = Reduced scoring.

In reduced scoring,

Super Jackpot increments are 50M instead of 100M.

Double Super Jackpot increments are 100M instead of 200M.

Ra's bracelet maximum is 10M instead of 20M.

Sandstorm bonus increments are 5M instead of 10M.

Trade Quartz has 5M and 25M awards instead of 10M and 50M.

Less time for 40M and 80M drop target hurry-up timers.

Battle bonus increments by 5M instead of 10M.

Glidercraft round maximum is 10M instead of 20M.

71) BALL TIME SAFETY

Should a ball drain very quickly, it will be returned to the shooter based upon this setting. This timer is active once per ball.

VERY EASY = 10 SECONDS.

EASY = 8 SECONDS.

*** MEDIUM = 6 SECONDS.

** HARD = 4 SECONDS.

VERY HARD = NO SAFETY TIME.

72) BALL GATE

This step allows you to control the operation of the ball gate.

*** EASY = Gate open at start of ball and is toggled by kicking rubbers and return lanes.

** HARD = Most switches close the ball gate. Gate is opened by lower ramp opto, left side rollover, and left outlane.

73) HIGH COMBOS SPECIAL

Award a special when High Combos to Date has been beaten?

OFF = No

*** ON = Yes

74) MINIMUM GAME TIME

This step allows for continuing play up to an adjusted minimum time (0 - 4 minutes).

*** 0 = no minimum time.

III. TEST MODE

IV. UTILITIES

Use the left flipper button to choose (highlight) a function and then the right flipper button to select or change the value of the function. Each utility is described below.

A. PRINT

Bookkeeping - all values
Short Bookkeeping - first 8 values

CAUTION

After printing is finished, all the short term bookkeeping steps (in brackets) will automatically reset if the PRINT BOOK RESET game adjustment is set to ON.

B. PRINTER SET-UP

Type - NSM DATA or SERIAL
Baud Rate - 1200, 2400, 4800, 9600
Data - 7 bit or 8 bit
Parity - none, even, or odd

C. ID NUMBERS

Two six digit numbers can be entered in permanent memory during this step. One is a GAME ID and the other is an ARCADE ID. These two ID's appear on all printouts. Also the GAME ID number will appear in the display on power-up. The left and right flipper buttons alter the digit value and the credit button enters the displayed value into memory and then proceeds to the next digit position.

D. BURN-IN

This function can be used to continuously exercise all the lamps and solenoids in the game.

V. TOURNAMENT MODE

The Tournament Mode switch provides a simple way to alter some of the normal game settings in order to provide for tournament play. The switch is located on a circuit board just inside the front door of the game to the lower left. The game must be in a game over condition in order to recognize the switch changing states. When the switch is moved to the "ON" position with the front door open, four Tournament Mode adjustments will appear on the display. These adjustments can be altered by using the left flipper button to select the function and the right flipper button

to alter the current setting. Once these settings have been chosen they will remain in permanent memory so that all that has to be done each subsequent time that tournament play is desired is to move the switch to the "ON" position. When the Tournament Mode settings are in effect they override the normal Game Adjustment settings. When the switch is moved to the "OFF" position, all the normal Game Adjustment settings are back in effect.

NOTE: Even if the game will not be used for tournament play, this switch can be used to provide an easy way to set the game for FREE PLAY without affecting any other game settings by setting the remaining three Tournament Mode adjustments to "NORMAL".

Each Tournament Mode adjustment is described below.

*** = Factory Default Setting

1) FREE PLAY

*** OFF = Credits are required to start a game.

ON = A game may be started without any credits posted.

2) GAME FEATURES

*** NORMAL = Normal play.

TOURNAMENT =

Various game features are altered as described below in order to provide the same odds for all players.

- a) No automatic Glidercraft round on last ball.
- b) High Combos to Date always set to 99 combos.
- c) Round timing is not changed due to player's skill level.
- d) Ball time safety disabled.
- e) Minimum game time disabled.

3) SPECIAL/REPLAY

*** NORMAL = Normal play.

POINTS =

Playfield Special awards
200,000,000 points. Match, High
Game to Date, and Score Replay
Level payouts are disabled.

4) EXTRA BALL

*** NORMAL = Normal play.

POINTS =

Extra Ball awards 100,000,000
points.

III. TEST MODE

SERVICE SWITCH

The switch is actuated when the front door is closed. With the front door closed, all bookkeeping steps are incremented normally. When the front door is opened all bookkeeping steps are frozen at their current values. Any credits that are added with the front door open are recorded in the SERVICE CREDITS bookkeeping steps.

AUTO-PRINT FEATURE

If there is a Communications Adapter installed in the game, the printer will immediately begin printing the first eight bookkeeping values as soon as it is plugged in during game over. If a different printout option is required the Test Mode must be entered first before plugging the printer in so that the immediate printout process does not begin. After printing is finished, all the short term bookkeeping steps (in brackets) will automatically reset if the PRINT BOOK RESET game adjustment is set to ON.

INOPERATIVE SWITCH REPORT

An inoperative switch report can be displayed by holding the credit button in during game over if there are no credits remaining and the game is not set for free play. Any switch that has not been operated in any of the last 15 games played will be reported.

SOUND ADJUSTMENTS

The speaker(s) output is controlled by the volume control located on a circuit board just inside the front door of the game to the lower left. Turning the volume control counter-clockwise will decrease the volume. Turning it clockwise will increase the volume.

POST ADJUSTMENTS

The post to the left of the lower pop bumper and the posts at the mouth of the right outlane can be positioned for liberal/conservative play. The smaller openings produce a more liberal game.

IV. THEORY OF OPERATION

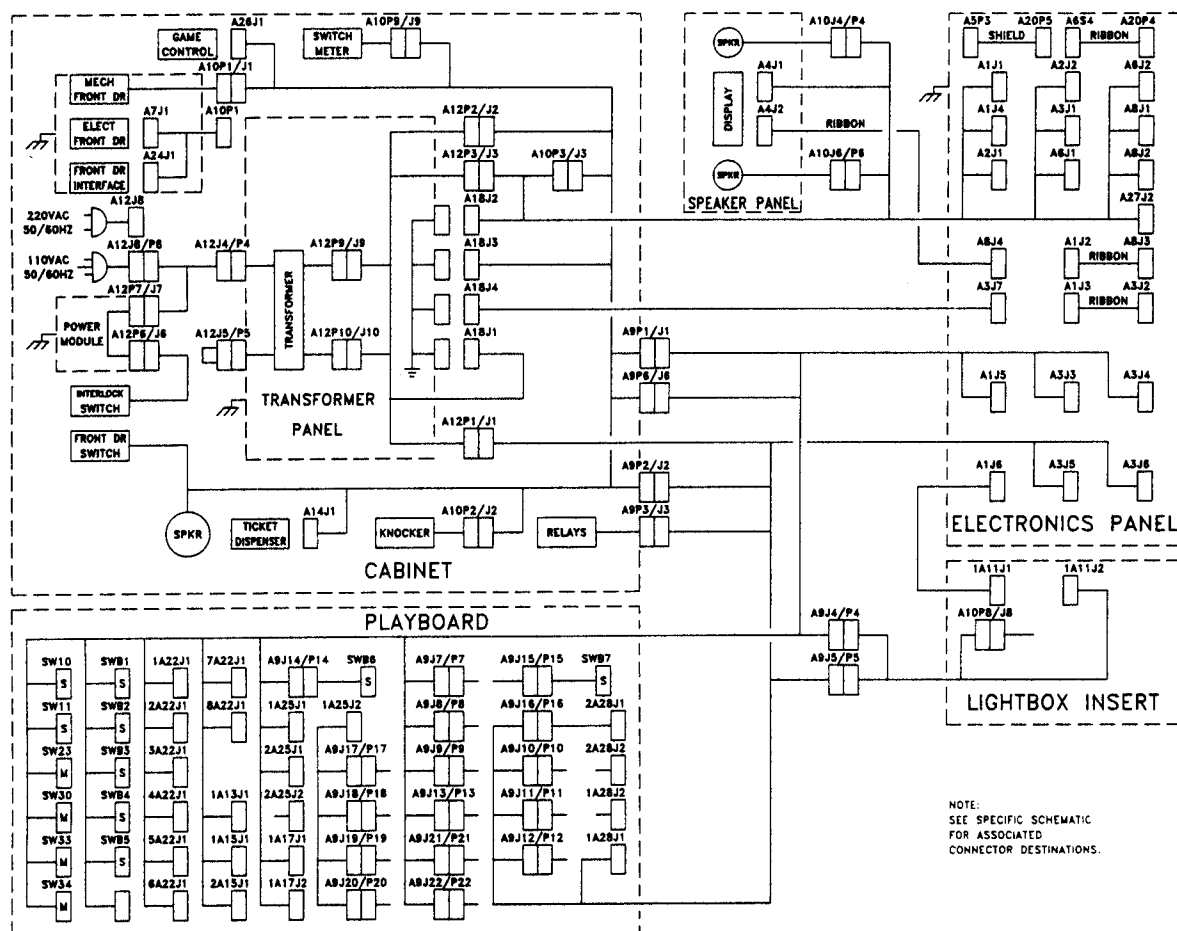


FIGURE 1. INTERCONNECTION DIAGRAM

IV. THEORY OF OPERATION

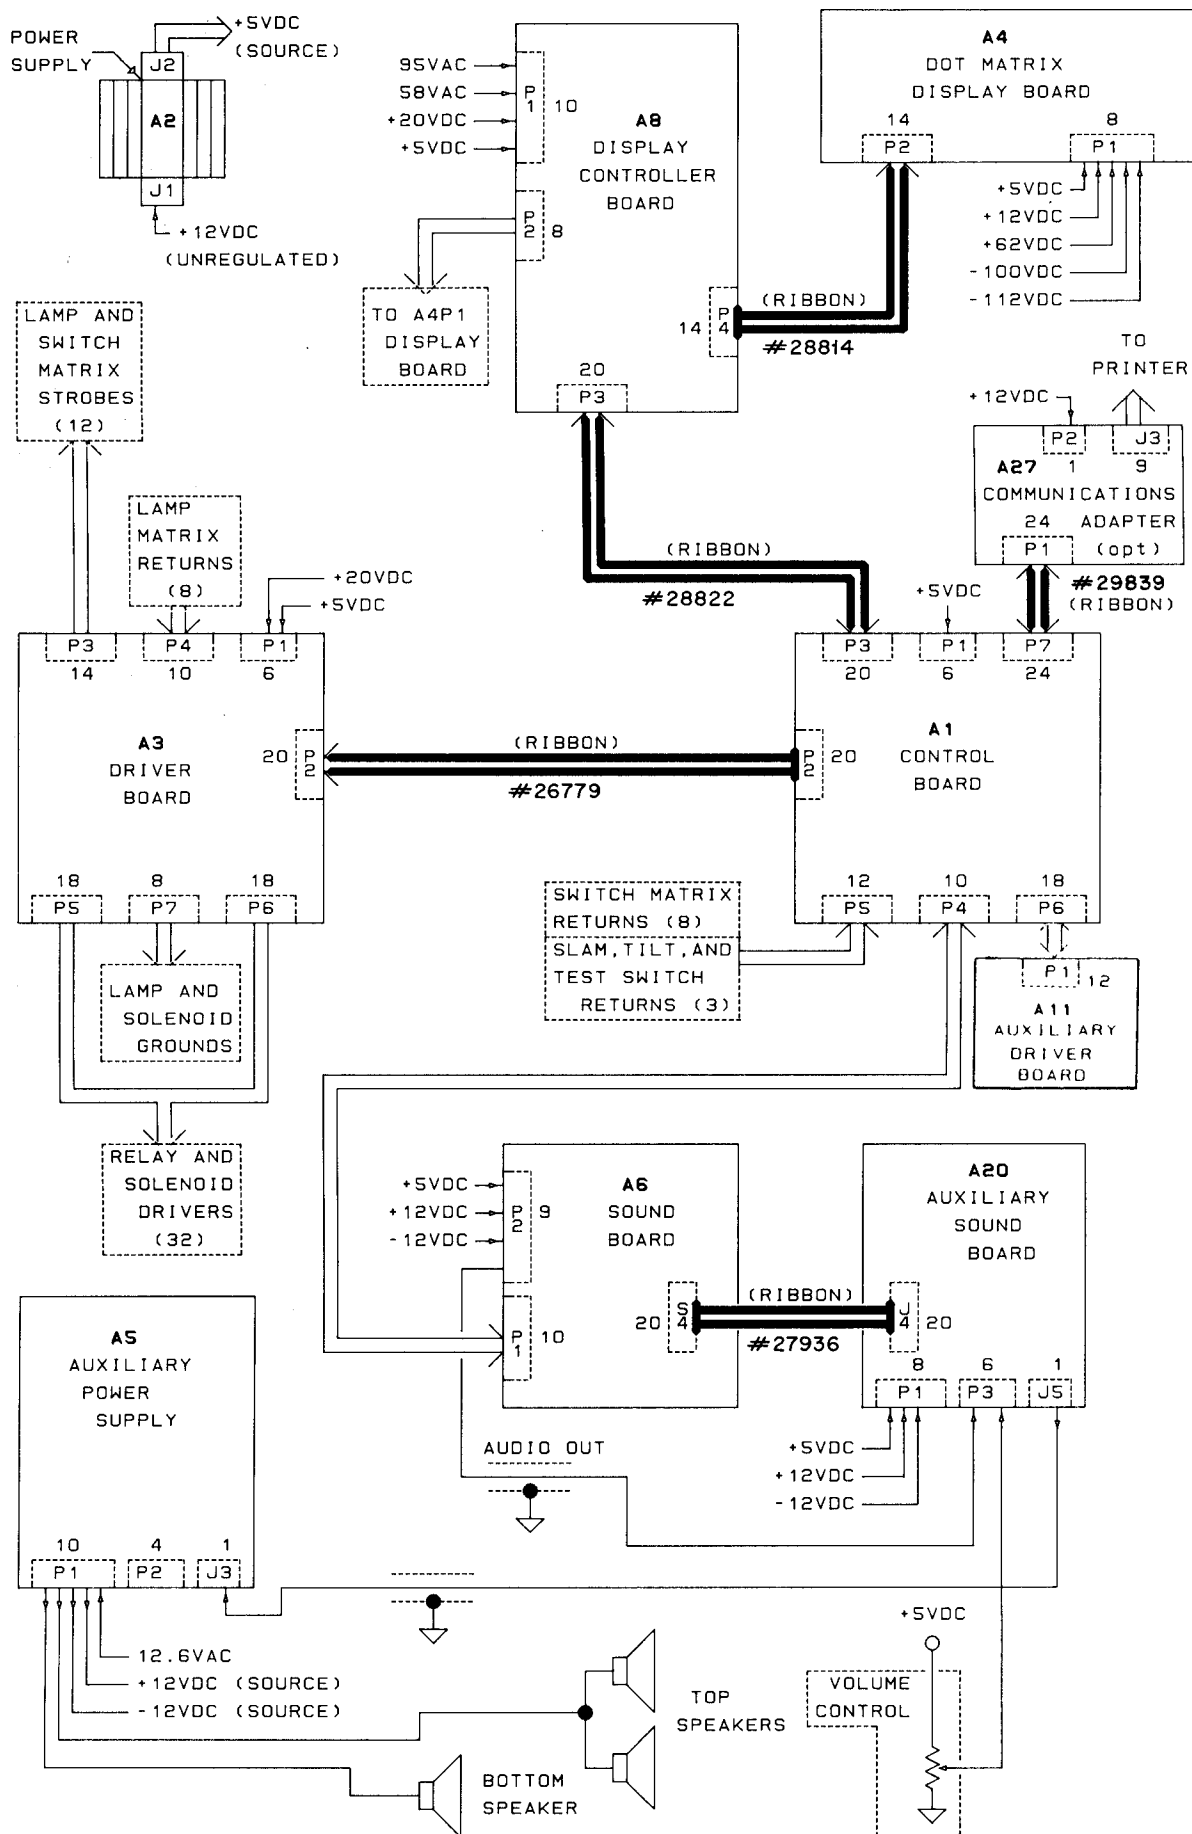


FIGURE 2. SYSTEM 3 BLOCK DIAGRAM

IV. THEORY OF OPERATION

A. CONTROL BOARD (A1)

The Control Board is supplied with 5vdc (A1P1) from the Power Supply (A2P2). The data contained in ram (U3) is kept valid when power is turned off by the lithium battery (BAT1) and controller (U6).

NOTE: When replacing either the battery, ram, or the controller there may be a message that appears in the display on power up the first time that indicates a low battery condition. If this occurs, turn the power off and back on again. The board should power up normally this time. If not, there is another problem on the board.

The Control Board can accomodate either a 27512 or a 27256 Eprom. JP1 must be installed for a 27512 or JP2 for a 27256 Game Prom. A 4 Mhz oscillator is configured using U17, R1, R2, C22, C23, and XTAL1. The oscillator output is then divided by 2 to a 2Mhz clock by U18 which is used as the input clock to the 65C02 (U1) microprocessor. The clock output of U1 (pin 39) is used as a sync signal for reading from or writing to the peripheral devices.

Two versatile interface adapters (U4, U5) are used to develop the necessary control signals for the system. The display connector (A1P3) is comprised of several signals. U4-15 and U4-17 are used as inputs to receive data from the Display Controller Board. Data is output to the Display Controller Board by U7 (BD0-BD7) and then latched by pulsing the DS0 line at U9-4. The output at DS1 (U9-5) is used to reset the Display Controller Board if it does not respond to data output by the Control Board.

The Driver Board connector (A1P2) contains all the signals necessary to operate the lamp and switch matrix strobes, the lamp matrix returns, and the solenoids. The lamp clear (LCLR), lamp strobe (LSTB), and lamp strobe data (LDATA) are generated by U4-12, U4-11, and U4-10 respectively. The appropriate lamp return data

during each active lamp strobe is output by U7 and latched into U5 on the Driver Board by the lamp return data strobe (LDS). The solenoid data is output by U7 (BD0-BD7) and latched into the appropriate Driver Board device (U1-U4) by the solenoid strobes (SS0-SS3).

The switch matrix returns are input at A1P5, buffered by U19 and U20 and then input to U4. Discrete inputs are provided at A1P5 for the slam, tilt, and test switches.

The connection to the Sound Board (A1P4) is made up of eight sound data lines (SD0-SD7), a return line (SRET), and a reset line (MR).

A reset circuit is configured using U13, U14, R3, and C24. When power is applied to the system, the microprocessor reset pin (U1-40) is held low for approximately 10 milliseconds. The system can also be reset by pressing the switch (SW1) on the board. Whenever a reset occurs the master reset signal (MR) (U18-9) is held low until the display strobe (DSTB) becomes active. At this point the master reset goes high which enables the peripheral IC's on the Display Board and Driver Board to accept data.

A watchdog circuit is employed to monitor both the display digit strobe and the lamp strobe. This circuit is made up of U11, U12, U13, U16, R5, R6, R29, R32, R33, C20, C21, C28, and C29. If either the display strobe (DSTB) or the lamp strobe (LSTB) is missing for 330 milliseconds the system will be reset. The system will also be reset if the supply voltage drops below 4vdc. This voltage monitor is configured using U21, VR1, D1, D2, R34, and R35.

B. POWER SUPPLY (A2)

The transformer panel delivers 12vdc to the input of the power supply. The regulated output voltage should be set to 5vdc by using potentiometer R3. This voltage is then supplied to the Control Board (A1), Driver Board (A3), Display Board (A4), Sound Board

IV. THEORY OF OPERATION

(A6), Display Controller Board (A8), and any other auxiliary board which may require it.

C. DRIVER BOARD (A3)

Two voltages are supplied to this board at A3P1. The 5vdc is supplied from the Power Supply (A2) and the 20vdc is supplied from the transformer panel. The 20vdc is used to source the controlled lamps and the switch matrix. The Driver Board receives its data at A3P2 from the Control Board (A1P2). Solenoid data is latched into U1-U4. Lamp return data is latched into U5. Lamp and switch strobe data is shifted through U6 and U7. The comparators (U10,U11) are used to protect the MOSFETS (Q33-Q49). If a sensed input voltage exceeds the reference voltage (Vref), the corresponding MOSFET is turned off immediately following the lamp clear pulse (LCLR) supplied by U12 thus limiting the duty cycle. If the master reset signal (MR) is held low all lamps and solenoids will be disabled.

D. DISPLAY CONTROLLER (A8)

This board is comprised of the power supply section and the digital section. The power supply is used to generate the necessary voltages that are required to power the Display Board. All voltages are input at A8P1 and then output to the Display Board at A8P2.

The digital section controls the information which appears in the display and also the refresh of the display information. The clock circuit runs at 3.579 MHz and is divided by two through U5 and then fed to the microprocessor (U1-37) as the master clock. The LED on the board will flash if the microprocessor (U1) is running properly. A controller chip (U2) is used to refresh the Display Board independent from the code which is being executed by the microprocessor (U1). U1 uses the data bus during the phase 2 portion of the clock while U2 uses it during the phase 1 portion. The address lines from both U1 and U2 are multiplexed through U9-U11 to determine which device has control of

the ram (U4). The necessary data is then output to the Display Board at A8P4. Data is both transmitted and received from the Control Board at A8P3. If the Control Board cannot successfully communicate with the Display Controller Board it will attempt to reset the Controller Board by sending a negative going signal on A8P3-14 (DS1).

E. DISPLAY BOARD (A4)

The Display Board consists of a 128 column X 32 row gas plasma display. The drive electronics located on the backside of the board convert low voltage serial data in to high voltage parallel data out for driving the display. The column drivers contain output latches so that column data for the following row can be entered while the present row is being displayed. All voltages required by the display are input at A4P1. All control signals needed to multiplex the display are input at A4P2. The Display Controller Board sends 128 bits of serial column data on the SDATA line for every row of display information. The data is shifted through the driver IC's by the dot clock signal (DCLK). The column data for a particular row is then latched by the column latch (CLATCH) signal. The row clock (RCLK) signal is used to clock the row driver data (RDATA) through the row driver IC. There is only one active row at a time. Between rows the display enable (DE) signal is used to prevent the display from flickering.

F. SOUND BOARD (A6)

The Sound Board consists of two 6502 microprocessor systems, a dual DAC, an input port to receive commands from the system Control Board, and a low level audio output at A6P2-9 which is sent to the summing amplifier located on the Auxiliary Sound Board (A20) for amplification.

The Sound Board requires three supply voltages +5vdc, +12vdc, and -12vdc. In addition, a power-up reset signal is required from the Control Board. If a manual reset is desired, pressing SW2 will reset both processors.

IV. THEORY OF OPERATION

A 4MHz oscillator is configured with R11, R12, C14, C15, C22, XTAL1, and T1. This clock is then divided down by S1 into either a 2MHz or 1MHz clock signal for the processors N1 and T3. A 250 KHz clock signal from S1-11 is used by the programmable timer section consisting of N5, H5, T5, and K5.

Eight lines from the Control Board are input at A6P1 on the Sound Board and sent to the two input code latches A3 and B2. When any of these inputs goes low (except for A6P1-9 when JP7 is not installed) A2-8 goes high which causes the input code data to be latched into A3 and B2. Also at the same time the flip-flops contained in A4 are clocked which cause the IRQ input of each microprocessor to go low. The outputs of A4 will remain in the low state until each flip-flop is cleared by a signal from its associated microprocessor after each IRQ is processed.

The Sound Board is designed to accomodate different types of Eproms. Jumpers JP1, JP2, JP3, and JP4 should be set to their proper positions based on the density of the Eproms being used.

G. AUXILIARY SOUND BOARD (A20)

The Auxiliary Sound Board contains a sound generator YM2151 (U9) and a sound/speech generator MSM6295 (U1). Both of these IC's operate under the control of the T3 microprocessor on the master Sound Board (A6). The sound generator YM2151 responds to its commands by sending serial data to the YM3014 DAC (U10). The DAC then converts this data into an analog signal which is filtered through a series of op-amps and then sent to the main summing amplifier (U11).

A 74HCT74 IC (U6) is used to divide the 4 MHz clock signal present at A20P4-9 into both a 1 MHz and 2 MHz signal which is selectable via JP3 (2 MHz) or JP4 (1 MHz). This signal is then used as the master clock for the speech generator (U1). When the speech generator (U1) receives a command, it then retrieves its data from the Eproms (U4, U5). The analog output at pin 36 (DAO) is then sent

through an active filter network and then to the main summing amplifier (U11).

The output of the main summing amplifier (U11-7) is input to a voltage controlled amplifier (VCA) (U13). The volume is controlled by a potentiometer located just inside the front door of the game. The potentiometer acts as a resistor divider which supplies a 0 to 5 volt signal to the VCA at U13-2. The output of the VCA is then sent to Auxiliary Power Supply (A5) for amplification.

H. SENSOR BOARD (A15)

This board is used to detect if any flipper is energized and then inputs the data to the Control Board to be processed. This board therefore eliminates the need for a second switch to be used on the flipper assembly itself. U1 is an optocoupler device which converts the input signal from the flipper circuit when energized to a signal which can be recognized by the Control Board as a valid switch closure.

I. OPTICAL INTERFACE (A25)

The optical interface assembly generates and receives the infrared light pulses needed to optically detect the ball breaking an infrared light beam. It also provides a visual indication that the interface assembly is functioning properly.

This method of detection transmits infrared light pulses from an opto LED to an opto phototransistor receiver. The LED light pulses are generated from a switch strobe that is buffered and current amplified by two sections of the LM339 voltage comparitor (output pins 1 & 2) and transistor Q2.

When no ball is present, the light pulses reach the opto receiver which passes the pulses 180 degrees out of phase with the switch strobe on to two additional sections of the comparitor (pins 9 & 10). Because the strobe pulses and receive pulses are out of phase, they cancel at resistors R1 & R3 and keep comparitor

IV. THEORY OF OPERATION

output pin 13 high therefore preventing Q1 from passing strobes on to the switch return line.




As a ball passes between the opto transmitter and receiver, the light beam is broken. Now, with no out of phase pulses coming from the receiver, the strobe appears at comparator inputs 9 & 10. Comparator output pin 13 begins pulsing low and passes the strobes through Q1 to the return line to signal a closed switch. Also positive strobe pulses at output pin 14 of the comparator turn Q3 on and light LED D2. D2 lit indicates a broken light beam and a closed optical switch.

The above principles also apply when using the quad optical interface board with a few exceptions. Four opto switches are processed by only one interface board. The switch strobes are not buffered, but are connected through 120 ohm 5 watt resistors to the opto LEDs. All of the opto switch comparators feed a common return transistor Q5, but still have individual red LEDs to indicate which of the four opto switches are closed.

J. SMART SWITCH™ (Piezo Film Sensor)

These devices take the place of the the normal contact point type switches used for sensing the ball on various different devices in the game. These

devices should not require any adjustment. DO NOT ATTEMPT TO ADJUST THE WIDE CANTILEVER BEAM used in a switch assembly. This could cause permanent damage to the device. The lifetime of these switches has been determined to be over 10 million cycles. The main advantage of these switches is the fact that they cannot be contaminated by such elements as moisture, dust, or smoke. Each switch assembly consists of a wide cantilever beam which has a piezo film sensor element laminated to its surface. When this beam is deflected, it induces a strain on the laminated piezo film sensor element. As the beam is returning to its rest position it generates an output voltage which triggers the on board circuit. This circuit then generates a momentary output which resembles that of contact points being closed. The switch design used in rollover and spot target applications generates an output signal as the beam which contains the piezo film returns to its rest position after it is actuated. The switch design used for pop bumpers generates an output signal as the beam is deflected in order to provide an immediate response by the pop bumper solenoid. This immediate response type of switch can be distinguished from the other because either the film itself or the printed circuit board will be colored blue. BE CAREFUL not to interchange these two different types of switches.

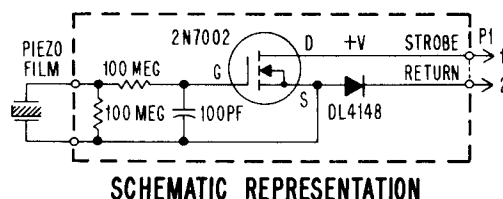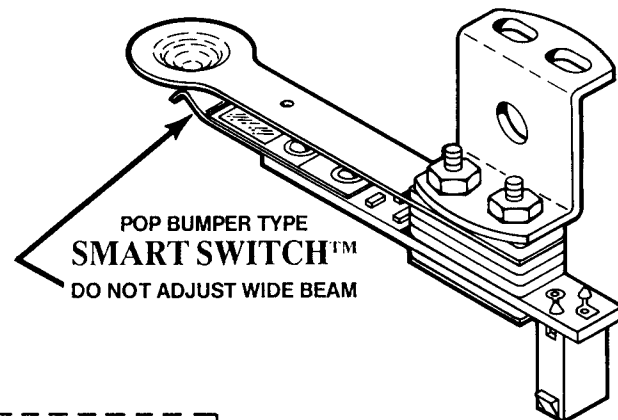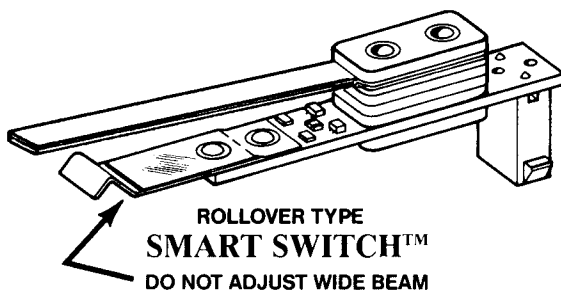

THE UNIVERSITY OF CHICAGO

[illegible]

V. GENERAL INFORMATION

A. PRINTED CIRCUIT BOARDS ARE DESIGNATED AS FOLLOWS:

A1 - Control Board
A2 - Power Supply
A3 - Driver Board
A4 - Dot Matrix Display
A5 - Auxiliary Power Supply
A6 - Sound Board
A8 - Display Controller
A11 - Auxiliary Driver Board
A13 - Resistor Board
A15 - Sensor Board
A16 - Filter Board
A17 - Diode Board
A20 - Auxiliary Sound Board
A22 - LED Board
A25 - Optical Interface Board
A26 - Game Controls Board
A27 - Communications Adapter (Optional)
A28 - Interface Board (Miscellaneous)

Printed circuit board connectors will be labeled AX-JX. For example, A3-J4 is the connector J4 to the driver board (A3).

B. WIRE COLORS ARE SHOWN AS NUMBERS:

0 Black
1 Brown
2 Red
3 Orange
4 Yellow
5 Green
6 Blue
7 Violet
8 Gray
9 White

For example, 688 is a BLUE-GRAY-GRAY striped wire.

C. FUSE AND COIL INFORMATION

TRANSFORMER PANEL

F1	Line Input.....	110V AC....	8 Amp	SLO-BLO
		220V AC....	4 Amp	SLO-BLO
F2	Primary Power.....	110V AC....	5 Amp	SLO-BLO
		220V AC....	2-1/2 Amp	SLO-BLO
F3	Display.....		3/8 Amp	SLO-BLO
F4	Display.....		3/8 Amp	SLO-BLO
F5	Power Supply.....		2-1/2 Amp	SLO-BLO
F6	Controlled Lamps and Switches.....		10 Amp	SLO-BLO
F7	Solenoids.....		8 Amp	SLO-BLO
F8	Lightbox Illumination.....		10 Amp	
F9	Playfield Illumination.....		7-1/2 Amp	
F10	Auxiliary Power Supply.....		3 Amp	SLO-BLO
F11	Auxiliary Power Supply.....		3 Amp	SLO-BLO

NOTE:

FUSE DESIGNATIONS F12 THRU F14 NOT USED.

V. GENERAL INFORMATION

PLAYBOARD FUSES, COILS/COLORS/SLEEVES

FUSE	RATING	PART NO.	USAGE	COIL/COLOR	SLEEVE
F15	1-1/2 AMP SLO-BLO	EL-24	BOTTOM POP BUMPER (Q1)	16570 (GREEN)	5064
F16	1-1/2 AMP SLO-BLO	EL-24	TOP POP BUMPER (Q2)	16570 (GREEN)	5064
F17	1-1/2 AMP SLO-BLO	EL-24	LEFT KICKING RUBBER (Q3)	5195 (WHITE)	5064
F18	1-1/2 AMP SLO-BLO	EL-24	RIGHT KICKING RUBBER (Q4)	5195 (WHITE)	5064
F19	1-1/2 AMP SLO-BLO	EL-24	LEFT KICKING TARGET (Q5)	5195 (WHITE)	5064
F20	1-1/2 AMP SLO-BLO	EL-24	CENTER KICKING TARGET (Q6)	5195 (WHITE)	5064
F21	1-1/2 AMP SLO-BLO	EL-24	RIGHT KICKING TARGET (Q7)	5195 (WHITE)	5064
F22	2-1/2 AMP SLO-BLO	EL-21	BOTTOM LEFT FLIPPER	25959 (RED)	5065
F23	2-1/2 AMP SLO-BLO	EL-21	BOTTOM RIGHT FLIPPER	25959 (RED)	5065
F24	2-1/2 AMP SLO-BLO	EL-21	TOP RIGHT FLIPPER	25959 (RED)	5065
F25	2 AMP SLO-BLO	EL-7	LOWER LEFT KICKER (Q8)	19300 (ORANGE)	5064
F26	2 AMP SLO-BLO	EL-7	SHOOTER LANE KICKER (Q9)	19300 (ORANGE)	5064
F27	1-1/2 AMP SLO-BLO	EL-24	TOP LEFT UPKICKER (Q10)	16570 (GREEN)	21411
F28	1 AMP SLO-BLO	EL-6	TOP CENTER UPKICKER (Q11)	17876 (TAN)	21411
F29	1 AMP SLO-BLO	EL-6	TOP RIGHT UPKICKER (Q12)	17876 (TAN)	21411
F30	1/2 AMP SLO-BLO	EL-20	LOWER LEFT BALL GATE (Q13)	31272 (BLUE)	5065
F31	1/2 AMP SLO-BLO	EL-20	LEFT PIVOT TARGET (Q14)	31272 (BLUE)	5065
F32	1/2 AMP SLO-BLO	EL-20	RIGHT PIVOT TARGET (Q15)	31272 (BLUE)	5065
F33	1/2 AMP SLO-BLO	EL-20	PYRAMID UNIT (Q16)	31272 (BLUE)	5065
F34	1/2 AMP SLO-BLO	EL-20	BALL RELEASE (Q28)	26451 (YELLOW)	5065
			OUTHOLE (Q29)	26451 (YELLOW)	5065
			ROLLOVER TARGET TRIP (Q20)	26452 (PINK)	----
			ROLLOVER TARGET RESET (Q19)	26450 (PINK)	25605
			2 BANK TARGET RESET (Q18)	26450 (PINK)	25605
F35	1 AMP SLO-BLO	EL-6	3 BANK TARGET RESET (Q17)	26926 (BLUE)	5172

V. GENERAL INFORMATION

D. COIL CHART

SOLENOID COILS					
PART NUMBER	WHERE USED	RESISTANCE (OHMS)	NUMBER OF TURNS	WIRE GAUGE	WRAPPER COLOR
A-19300	GENERAL PURPOSE	7.8	1075	#25	ORANGE
A-5195	GENERAL PURPOSE	12.3	1305	#26	WHITE
A-16570	GENERAL PURPOSE	15.5	1450	#27	GREEN
A-17876	GENERAL PURPOSE	24	1750	#28	TAN
A-26450	GENERAL PURPOSE	42	2400	#29	PINK
A-26451	GENERAL PURPOSE	65.8	3000	#30	YELLOW
A-30297	GENERAL PURPOSE	66.5	2750	#30	BLUE
A-26926	3-BANK RESET	32.8	2650	#27	BLUE
A-29876	FLIPPER (NEW UNIT)	2.36/202	560/3325	#23/#33	ORANGE
A-25959	FLIPPER (NEW UNIT)	3.85/202	720/3325	#24/#33	RED
A-26646	FLIPPER (NEW UNIT)	4.57/201	725/3470	#25/#33	BLUE
A-28740	FLIPPER (NEW UNIT)	6.02/207	790/3600	#26/#33	TAN
A-27642	FLIPPER (NEW UNIT)	9.1/203	950/3700	#27/#33	YELLOW
A-27643	FLIPPER (OLD UNIT)	11.4/202	960/3670	#28/#33	GREEN
A-30468	FLIPPER (OLD UNIT)	11.59/269	960/4700	#28/#33	WHITE
A-31272	GENERAL PURPOSE	44.8/268	2200/3575	#30/#34	BLUE
A-27926	GENERAL PURPOSE	64.7	3475	#29	BLUE
RELAY COILS					
PART NUMBER	WHERE USED	RESISTANCE (OHMS)	NUMBER OF TURNS	WIRE GAUGE	WRAPPER COLOR
A-26452	DROP TAR. TRIP	137	2450	#35	PINK
A-16890	GENERAL PURPOSE	231	4000	#35	ORANGE


VI. WIRING AND SCHEMATIC DIAGRAMS, PARTS LISTS

TABLE OF CONTENTS

	PAGE(S)
DIODE BOARD (A17)	
COMPONENT LOCATION AND PART LIST.....	28
FILTER BOARD (A16)	
COMPONENT LOCATION.....	28
GAME CONTROLS BOARD (A26)	
COMPONENT LOCATION AND PARTS LIST.....	28
RESISTOR BOARD (A13)	
COMPONENT LOCATION AND PARTS LIST.....	28
OPTO TRANSMITTER, OPTO RECEIVER	
OPTICAL INTERFACE BOARD (A25)	
COMPONENT LOCATION AND PARTS LIST	29
AUXILIARY DRIVER BOARD (A11)	
COMPONENT LOCATION AND PARTS LIST	29A
SCHEMATIC DIAGRAM	29A
SENSOR BOARD (A15)	
COMPONENT LOCATION AND PARTS LIST	30
SCHEMATIC DIAGRAM	30
CONTROL BOARD (A1)	
COMPONENT LOCATION AND PARTS LIST	30A
SCHEMATIC DIAGRAM	31-33
DRIVER BOARD (A3)	
SCHEMATIC DIAGRAM	34-36
COMPONENT LOCATION AND PARTS LIST	37
QUAD OPTO TRANSMITTER, OPTO RECEIVER	
OPTICAL INTERFACE BOARD (A25)	
COMPONENT LOCATION AND PARTS LIST	38, 39
AUXILIARY POWER SUPPLY (A5)	
COMPONENT LOCATION AND PARTS LIST.....	40
SCHEMATIC DIAGRAM.....	40
AUXILIARY SOUND BOARD (A20)	
COMPONENT LOCATION AND PARTS LIST.....	41
SCHEMATIC DIAGRAM.....	41, 42
SOUND BOARD (A6)	
COMPONENT LOCATION AND PARTS LIST.....	43
SCHEMATIC DIAGRAM.....	44, 45
DISPLAY CONTROLLER (A8)	
SCHEMATIC DIAGRAM.....	46-48
COMPONENT LOCATION AND PARTS LIST.....	49
DOT MATRIX DISPLAY (A4)	
FRONT VIEW, WIRING DIAGRAM.....	49
SWITCH MATRIX	
SCHEMATIC DIAGRAM.....	50, 51
POWER SUPPLY (A2)	
COMPONENT LOCATION AND PARTS LIST.....	52
SCHEMATIC DIAGRAM.....	52
LAMP MATRIX	
SCHEMATIC DIAGRAM.....	53, 54
PLAYBOARD	
SCHEMATIC DIAGRAM.....	55, 56
MOTOR INTERFACE BOARD	
SCHEMATIC DIAGRAM.....	56
COMPONENT LOCATION AND PARTS LIST.....	56
TRANSFORMER PANEL	
SCHEMATIC DIAGRAM.....	57, 58
LIGHTBOX/PLAYBOARD	
SCHEMATIC DIAGRAM.....	59, 60
CABINET/FRONT DOOR	
SCHEMATIC DIAGRAM.....	61, 62
ELECTRONIC FRONT DOOR	
SCHEMATIC DIAGRAM.....	62

VI. WIRING AND SCHEMATIC DIAGRAMS, PARTS LISTS

DIODE BOARD (A17) COMPONENT LOCATION

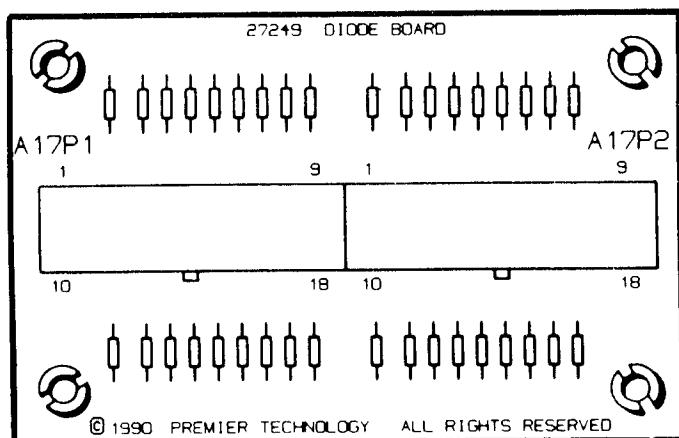


DIODE BOARD (A17) PARTS LIST

REFERENCE DESCRIPTION PART NUMBER

1A17	Diode Matrix Assembly	MA-1448
D1-D32	Diode, 1N4148	XO-261
P1, P2	Header, 18 Position	XO-916
R1-R4	Resistor, 220 OHM, 5%, 1/4W	XO-21
	Circuit Board Support (4)	23984

FILTER BOARD (A16) COMPONENT LOCATION

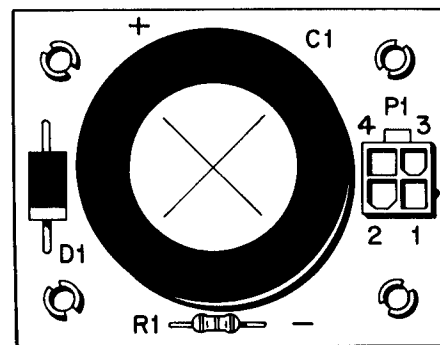


FILTER BOARD (A16) PARTS LIST

REFERENCE DESCRIPTION PART NUMBER

C1	FILTER BOARD ASSEMBLY	MA-1745
	CAPACITOR, 2200UF, 100V	XO-923
D1	DIODE, 1N5401	XO-263
R1	RESISTOR, 24K OHM, 5%, 1/4W	XO-10
P1	HEADER, 4 POSITION	XO-909
	CIRCUIT BOARD SUPPORT (4)	23984

RESISTOR BOARD (A13) COMPONENT LOCATION

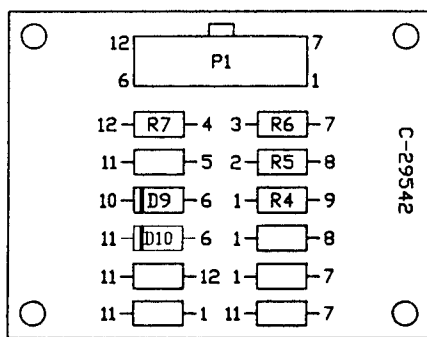


RESISTOR BOARD (A13) PARTS LIST

REFERENCE DESCRIPTION PART NUMBER

	RESISTOR BOARD (A13)	30987
D9, D10	DIODE, 1N4004	XO-254
R4-R7	RESISTOR, 220 OHM, 5%, 1/4W	XO-21
P1	HEADER, 12 POSITION	XO-913
	SPACER, (4)	23984

GAME CONTROLS BOARD (A26) COMPONENT LOCATION

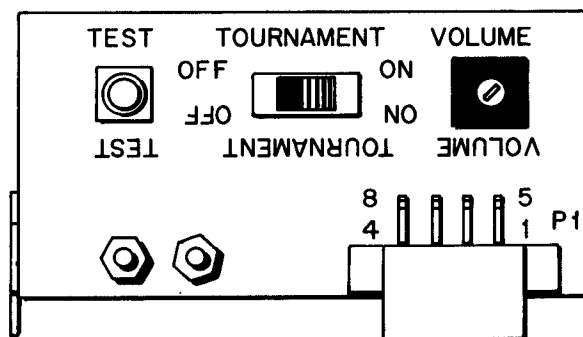


GAME CONTROLS BOARD (A26) PARTS LIST

DESCRIPTION PART NUMBER


Game Controls Board (A26)	MA-1851
Potentiometer, 10K OHM, 20%, 15W	XO-1194
Pushbutton Switch	XO-897
Slide Switch	XO-1193
Header, 8 Position	XO-920
Mounting Bracket	28619
Key Cap, Yellow	XO-1198

OPTO LED TRANSMITTER BOARD SCHEMATIC DIAGRAM

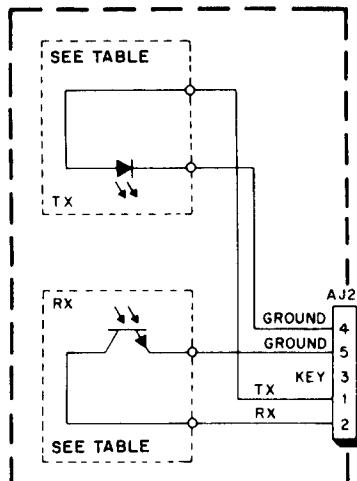


OPTO PHOTOTRANSISTOR RECEIVER BOARD SCHEMATIC DIAGRAM

FROM PLAYBOARD AJ1

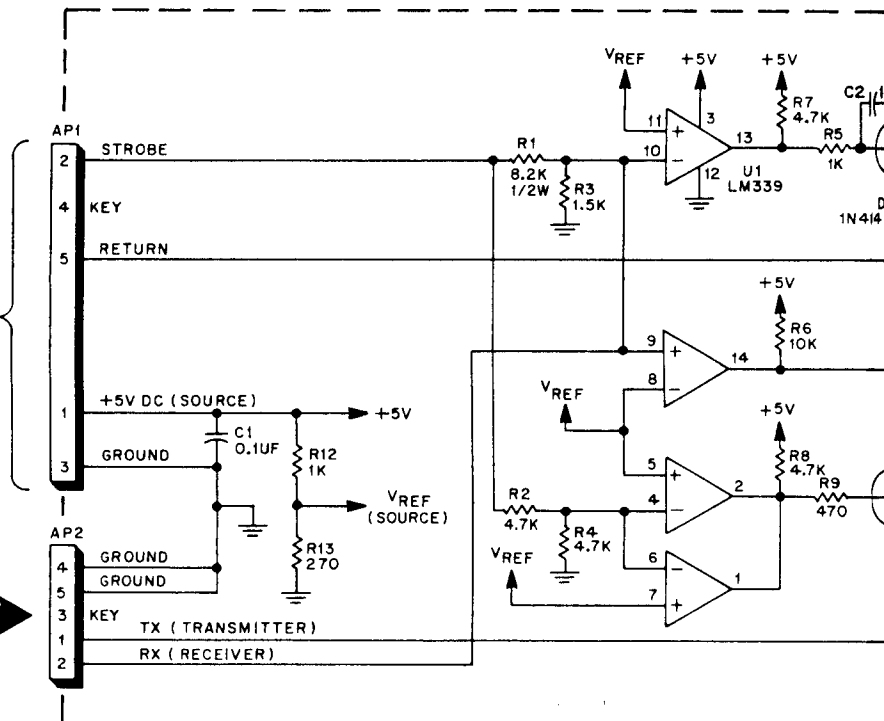

OPTICAL INTERFACE BOARD SCHEMATIC DIAGRAM


OPTICAL INTERFACE COMPONENT LOCATION



OPTICAL INTERFACE PARTS LIST

REFERENCE	DESCRIPTION
AP1, AP2	Optical Interface Board
C1	Capacitor, 0.1UF, 50V
C2	Capacitor, 1UF, 50V
D1	Diode, 1N4148
D2	Diode, MV5752 (LED)
Q1, Q2	Transistor, PNP, 2N3904
Q3	Transistor, NPN, MPS2222
R1	Resistor, 8.2K Ohm, 1/2W
R2, R4, R7, R8	Resistor, 4.7K Ohm, 1/2W
R3	Resistor, 1.5K Ohm, 1/2W
R5, R12	Resistor, 1K Ohm, 1/2W
R6	Resistor, 10K Ohm, 1/2W
R9	Resistor, 470 Ohm, 1/2W
R10, R11	Resistor, 20 Ohm, 1/2W
R13	Resistor, 270 Ohm, 1/2W
U1	IC, Quad Comparators, SRS-8-6N, (2)


OPTO LED TRANSMITTER BOARD COMPONENT LOCATION



OPTO LED TRANSMITTER BOARD PARTS LIST

REFERENCE	DESCRIPTION	PART NUMBER
TX	Opto LED Transmitter Assembly	SEE TABLE
	Plastic Transmitter LED	XO-994

OPTO PHOTOTRANSISTOR RECEIVER BOARD COMPONENT LOCATION



OPTO PHOTOTRANSISTOR RECEIVER BOARD PARTS LIST


REFERENCE	DESCRIPTION	PART NUMBER
	Opto Phototransistor Receiver Assembly	SEE TABLE
RX	Plastic Phototransistor	XO-993

BRACKET AND OPTO BOARD ASSEMBLY REFERENCES


ASSEMBLY	CONNECTOR NO.	BRACKET NO.	LOCATION	TRANSMITTER	RECEIVER
31184	2A25J1-2,5'	31183	TOP PYRAMID TROUGH	31240	31241

NOTE: BRACKET AND OPTO BOARD ASSEMBLY DOES NOT INCLUDE WIRING HARNESS.

SCHEMATIC DIAGRAMS, PARTS LISTS

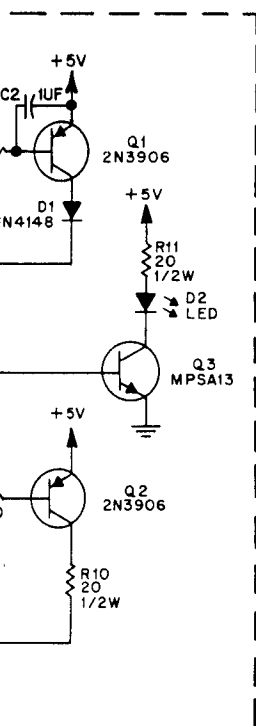


SCHEMATIC DIAGRAM
AUXILIARY DRIVER BOARD (A11)
COMPONENT LOCATION

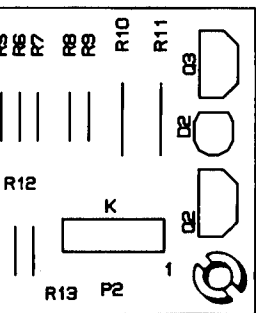


SCHEMATIC DIAGRAM
AUXILIARY DRIVER BOARD (A11)
PARTS LIST

REFERENCE	DESCRIPTION	PART NUMBER
MA-1558	Board Assembly	MA-1558
XO-1002	Capacitor, .01UF, 10%, 50V	XO-1002
XO-230	Capacitor, 10UF, +80%-20%, 25V	XO-230
XO-746	Transistor, MOSFET, 12N10L	XO-746
XO-261	Resistor, 2.2K, OHM, 5%, 1/4W	XO-261
XO-270	Resistor, 100K OHM, 5%, 1/4W	XO-270
XO-588	Resistor Pack, 4.7 OHM X 9	XO-588
XO-304	IC, Octal "D" Flip-Flop, 74HC273	XO-304
XO-1022	Header, 12 Position	XO-1022
XO-7	Header, 10 Position	XO-7
XO-20	Capacitor, .01UF, 10%, 50V	XO-20
XO-5	Capacitor, 10UF, +80%-20%, 25V	XO-5
XO-18	Transistor, MOSFET, 12N10L	XO-18
XO-35	Resistor, 2.2K, OHM, 5%, 1/4W	XO-35
XO-65	Resistor, 100K OHM, 5%, 1/4W	XO-65
XO-68	Resistor Pack, 4.7 OHM X 9	XO-68
XO-583	IC, Octal "D" Flip-Flop, 74HC273	XO-583
23984	Header, 12 Position	23984

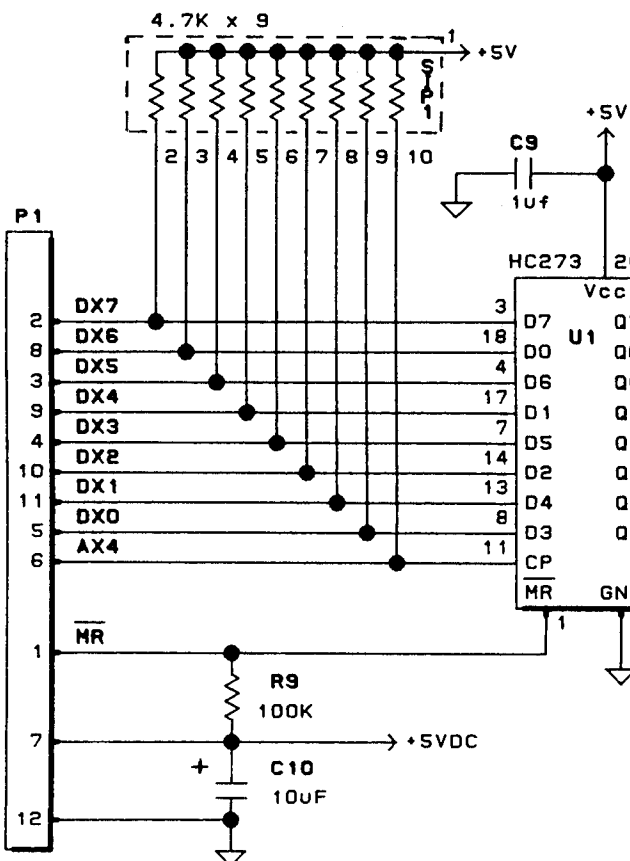


AUXILIARY DRIVER BOARD (A11)
COMPONENT LOCATION

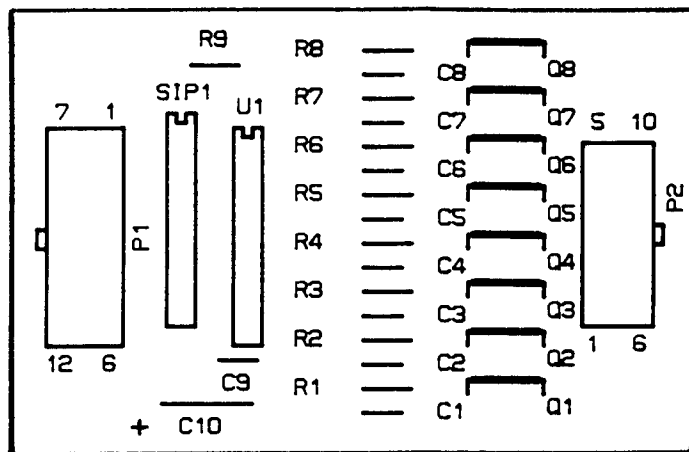


AUXILIARY DRIVER BOARD (A11)
PARTS LIST

REFERENCE	DESCRIPTION	PART NUMBER
MA-1722	Board Assembly	MA-1722
C1-C9	Capacitor, .01UF, 10%, 50V	XO-696
C10	Capacitor, 10UF, +80%-20%, 25V	XO-225
Q1-Q8	Transistor, MOSFET, 12N10L	XO-947
R1-R8	Resistor, 2.2K, OHM, 5%, 1/4W	XO-27
R9	Resistor, 100K OHM, 5%, 1/4W	XO-45
SIP1	Resistor Pack, 4.7 OHM X 9	XO-906
U1	IC, Octal "D" Flip-Flop, 74HC273	XO-949
P1	Header, 12 Position	XO-913
P2	Header, 10 Position	XO-912

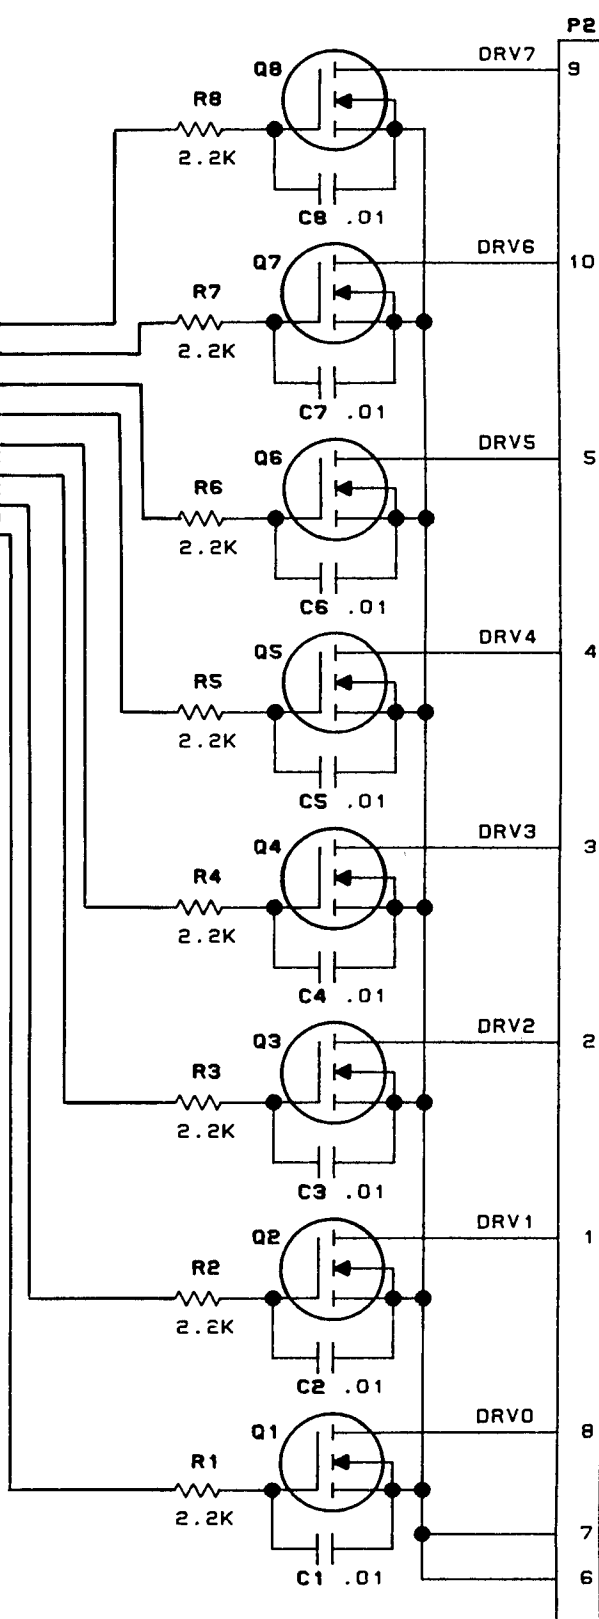


Premier Technology			
TITLE AUXILIARY DRIVER BOARD (A11) SCHEMATIC DIAGRAM			
DRAWN J.B.	APPROVED R.H.M.	DATE 12-2-91	MA-1722

VI. WIRING AND SCHEMATIC DIAGRAMS, PARTS LISTS

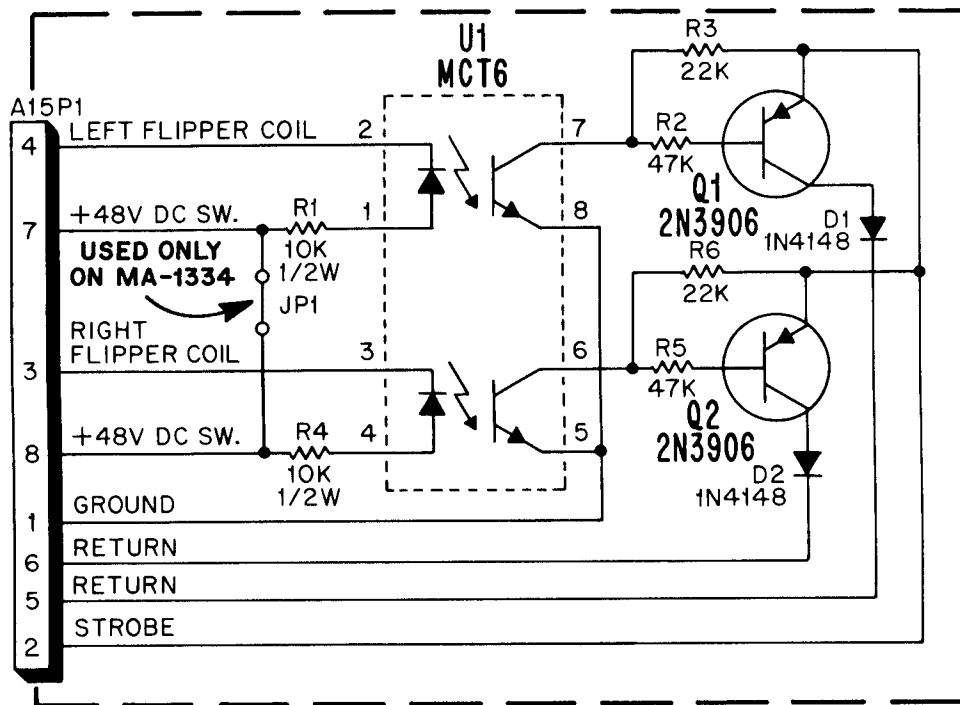

Premier Technology			
TITLE			
SENSOR BOARD (A15)			
SCHEMATIC DIAGRAM			
DRAWN	APPROVED	DATE	E-27041
G.P.S.	RHM	10-12-89	

SENSOR BOARD (A15) COMPONENT LOCATION

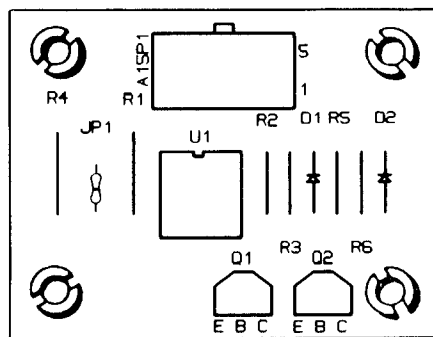


SENSOR BOARD (A15) PARTS LIST

REFERENCE	DESCRIPTION	PART NUMBER	
	Sensor Board Assembly (A15)	MA-1334	MA-2108
D1, D2	Diode, 1N4148	XO-261	XO-261
JP1	Jumper, Resistor, 0 OHM	XO-469	(NOT USED)
Q1, Q2	Transistor, 2N3906 (PNP)	XO-588	XO-588
R1, R4	Resistor, 10K Ohm, 5%, 1/2W	XO-62	XO-62
R2, R5	Resistor, 47K Ohm, 5%, 1/4W	XO-30	XO-30
R3, R6	Resistor, 22K Ohm, 5%, 1/4W	XO-42	XO-42
U1	IC, Optocoupler, MCT6	XO-1000	XO-1000
A15P1	Header, 8 Position	XO-911	XO-911
	Spacer (4)	23984	23984

VI. WIRING AND SCHEMATIC DIAGRAMS, PARTS LISTS


CONTROL BOARD (A1) COMPONENT LOCATION

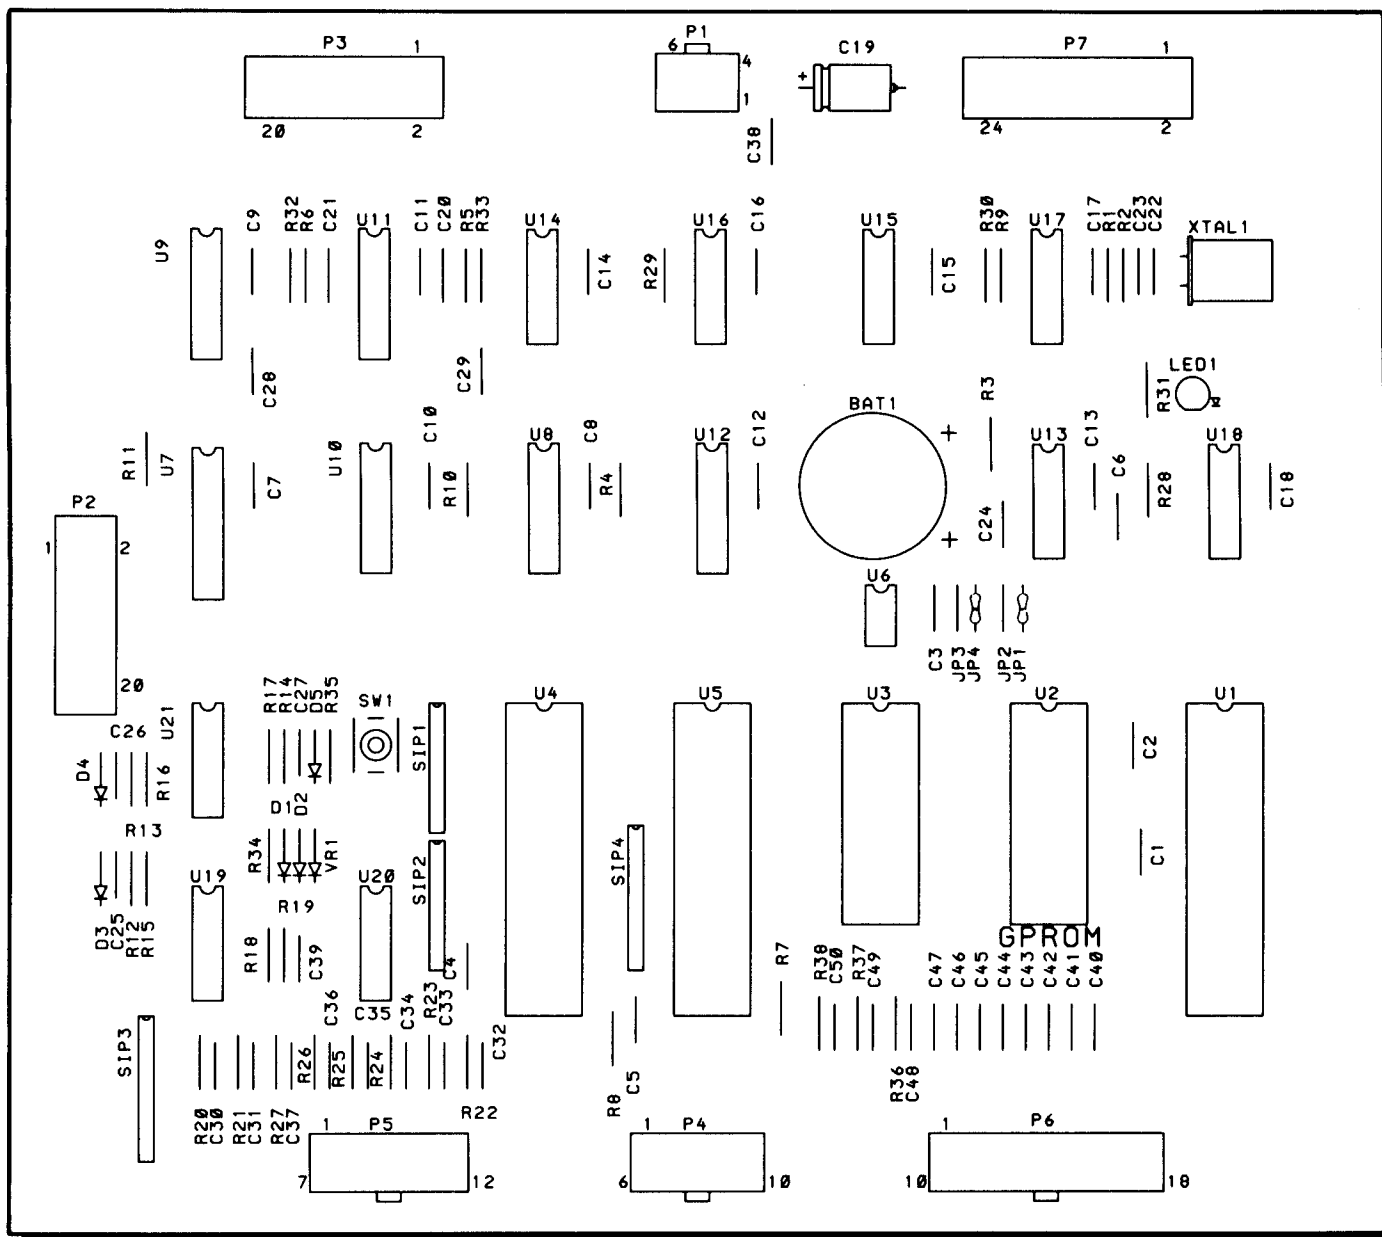


CONTROL BOARD (A1) PARTS LIST


REFERENCE	DESCRIPTION	PART NUMBER	REFERENCE	DESCRIPTION	PART NUMBER
BAT 1	Control Board Assembly (A1)	MA-1934	SIP3, SIP4	Resistor Pack, 4.7K OHM X 8	X0-161
C3, C7-C18, C30-C50	Lithium Battery, LM2430, 3V	X0-925	SW1	Switch, N.O.	X0-897
C1, C2, C4	Capacitor, .01UF, +80% -20%, 50V	X0-229	U1	IC, 65C02P2, CPU, 2MHZ	X0-927
C5, C25, C27	Capacitor, 0.1UF, +80% -20%, 50V	X0-230	U3	IC, 6264LP, 8K X 8, Static Ram	X0-781
C6, C22, C23	Capacitor, 33PF, 10%, 100V	X0-896	U4, U5	IC, 6522AP, Versatile Interface Adaptor (VIA)	X0-929
C19	Capacitor, 100UF, +80% -20%, 10V	X0-211	U6	IC, DS1210, Non-Volatile Controller	X0-930
C20, C21	Capacitor, 1UF, 20%, 50V	X0-746	U7	IC, 74HCT373, Octal Latch	X0-931
C24	Capacitor, .022UF, 10%, 50V	X0-873	U8	IC, 74HCT138, Decoder	X0-932
C28, C29	Capacitor, 1000PF, 10%, 100V	X0-296	U9, U10	IC, 74HCT139, Dual Decoder	X0-933
D1-D5	Diode, 1N4148	X0-261	U11	IC, 74HC123, Dual Multivibrator	X0-934
LED 1	LED, MV5752 (Red)	X0-270	U12	IC, 74HC161, Binary Counter	X0-935
R1	Resistor, 22 MEGOHM, 5%, 1/4W	X0-74	U13	IC, 74HC14, Schmitt Hex Inverters	X0-936
R2, R10, R11	Resistor, 10K OHM, 5%, 1/4W	X0-18	U14	IC, 74HC11, Triple "And" Gates	X0-937
R18, R28, R30	Resistor, 560K OHM, 5%, 1/4W	X0-169	U15, U16	IC, 74HC00, Quad "Nand" Gates	X0-782
R3	Resistor, 680K OHM, 5%, 1/4W	X0-669	U17	IC, 74HC04, Hex Inverters	X0-888
R5, R6	Resistor, 3K OHM, 5%, 1/4W	X0-23	U18	IC, 74HC74, Dual "D" Flip-Flop	X0-939
R4, R7-R9	Resistor, 2.2K OHM, 5%, 1/4W	X0-27	U19, U20, U21	IC, LM339, Quad Comparators	X0-583
R12-R14	Resistor, 3.3K OHM, 5%, 1/4W	X0-38	VR1	Zener Diode, 1N5225B, 3V, 5%	X0-269
R15-R17	Resistor, 4.7K OHM, 5%, 1/4W	X0-7	XTAL1	Crystal, 4MHZ	X0-366
R19-R27, R36-R38	Resistor, 100 OHM, 5%, 1/4W	X0-28	A1P1	Header, .6 Position	X0-910
R31	Resistor 330 OHM, 5%, 1/4W	X0-34	A1P2, A1P3	Header, 20 Position (Ribbon)	X0-940
R32-R33	Resistor, 100K OHM, 5%, 1/4W	X0-45	A1P4	Header, 10 Position	X0-912
R34	Resistor, 1K OHM, 5%, 1/4W	X0-5	A1P5	Header, 12 Position	X0-913
R35	Resistor, 100 OHM, 5%, 1/4W	X0-28	A1P6	Header, 18 Position	X0-916
SIP1, SIP2	Resistor Pack, 10K OHM X 7, 5%, 1/4W	X0-926	A1P7	Header, 24 Position	X0-1201
				Jumper, Resistor, 0 OHM (2)	X0-469
				Socket, 28 Pin Dip	X0-536




VI. WIRING AND SCHEMATIC DIAGRAMS, PARTS LISTS

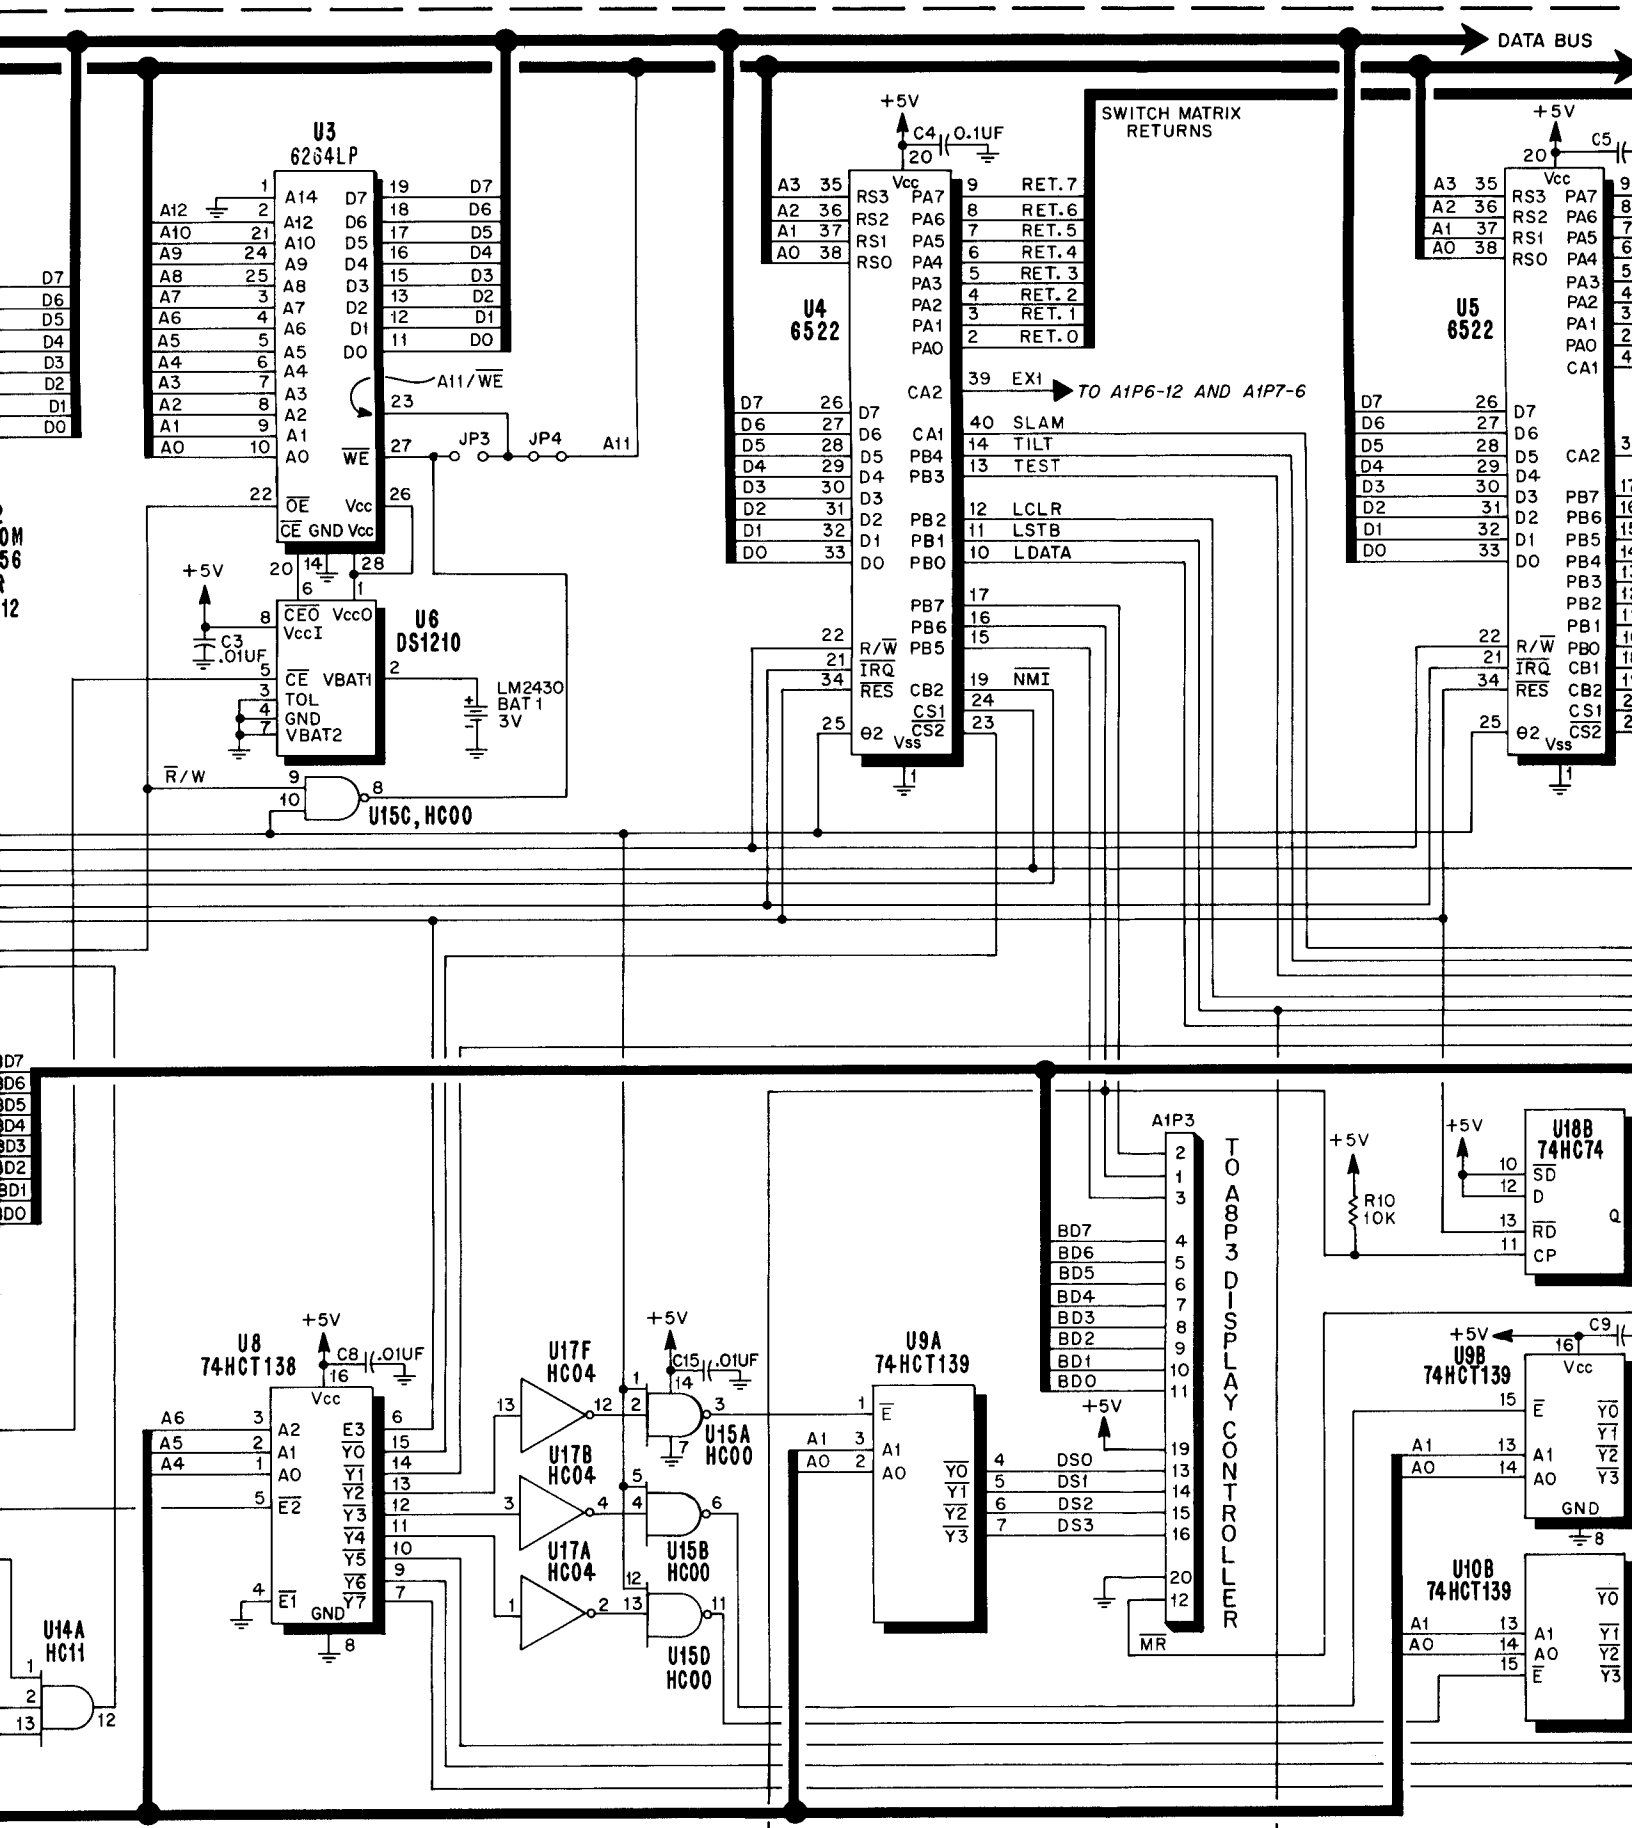

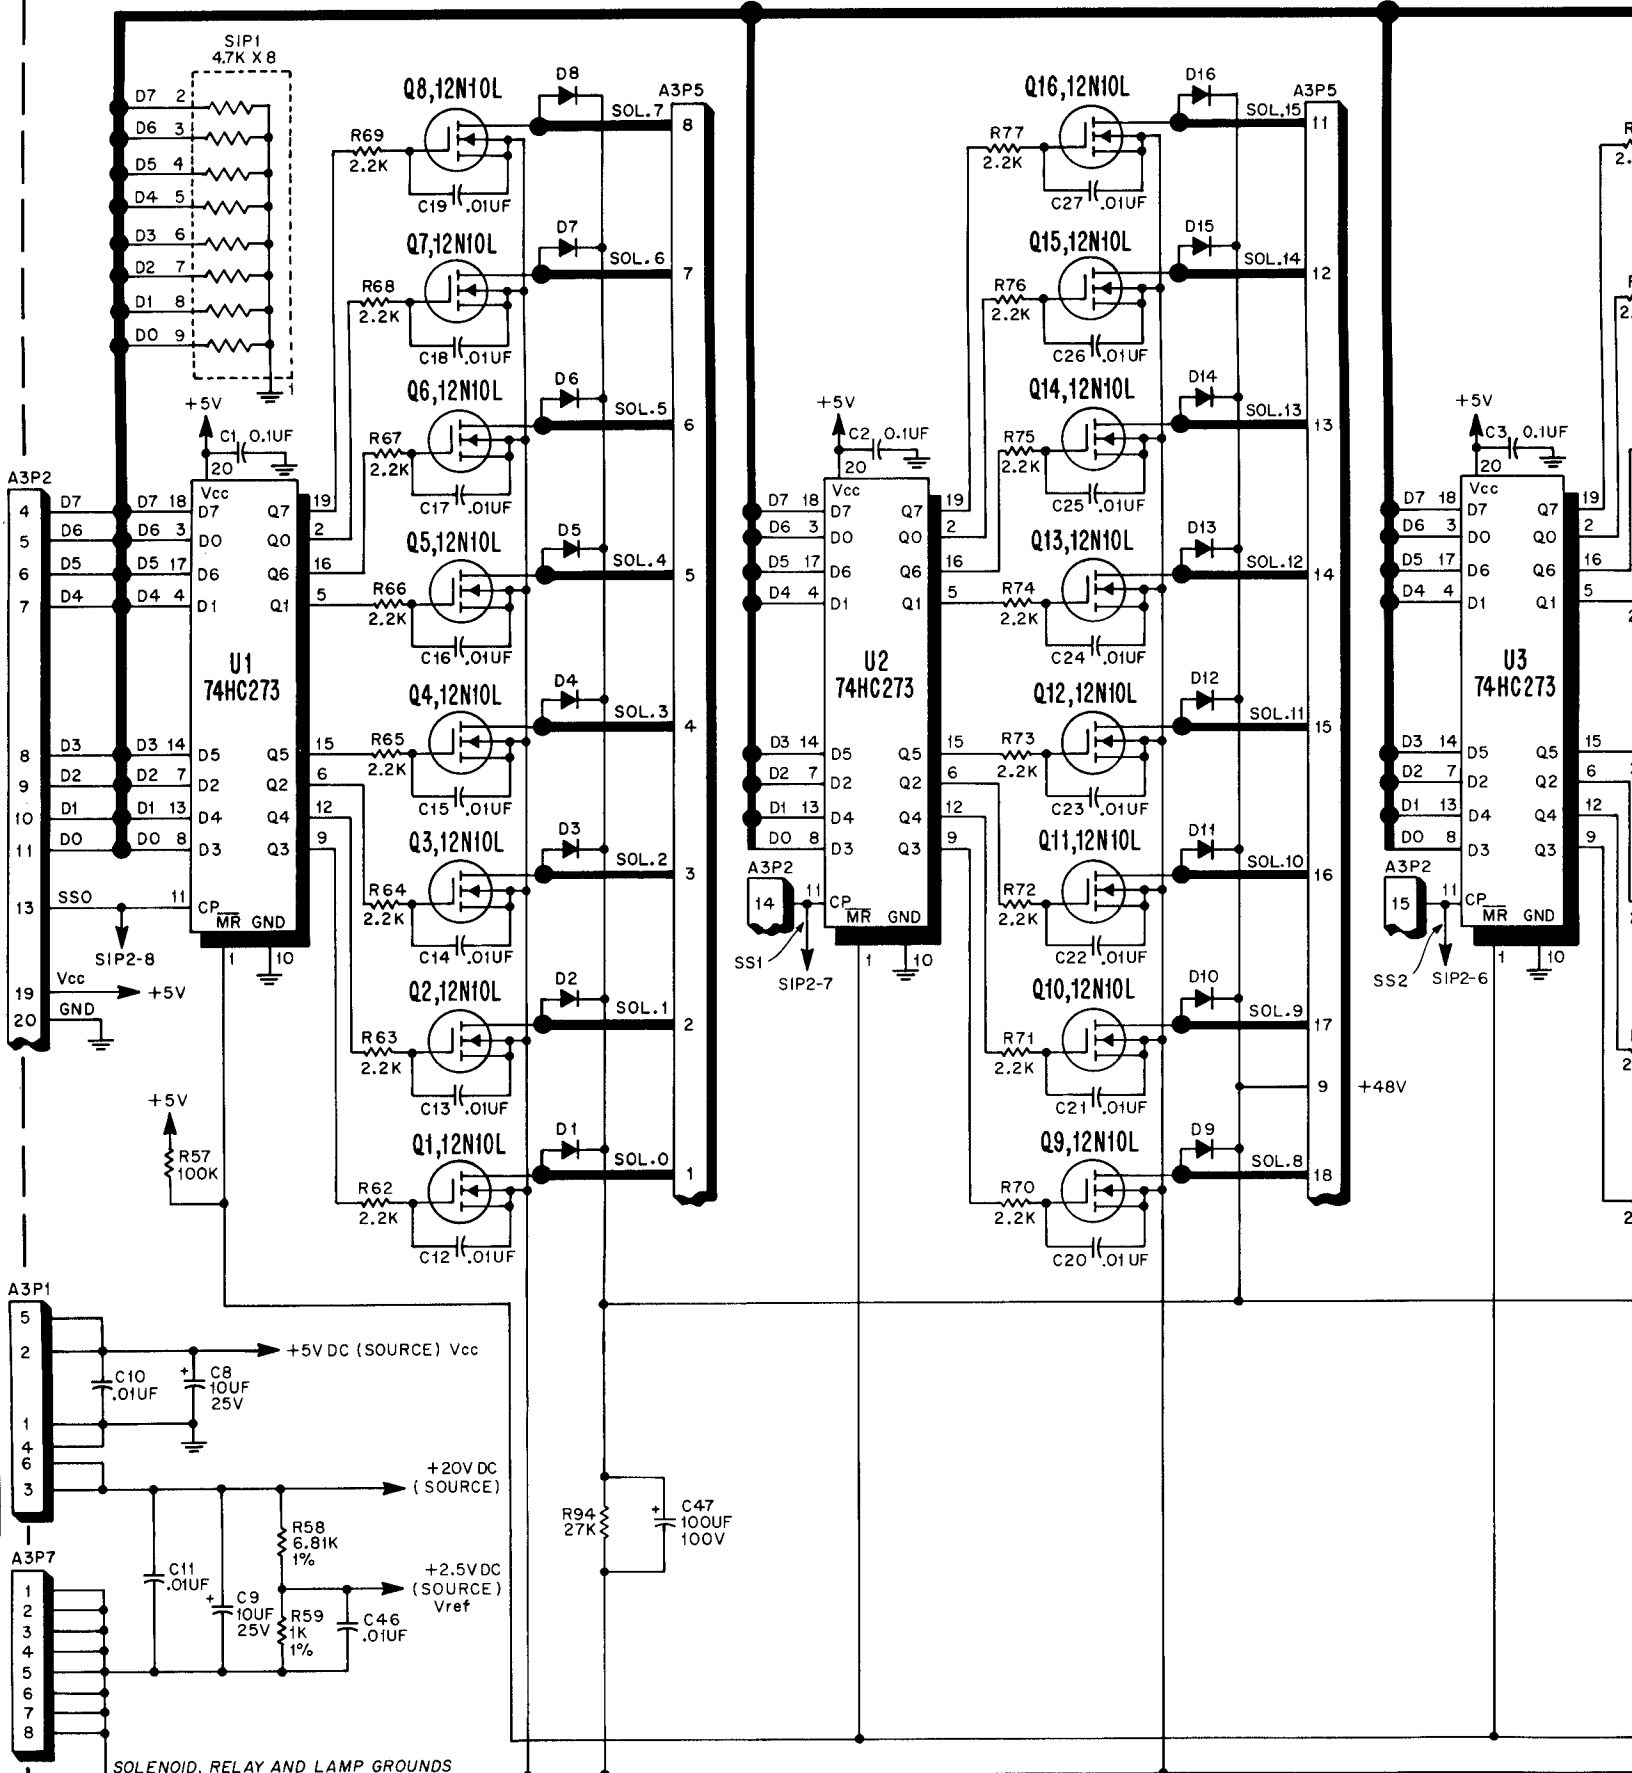

VI. WIRING AND SCHEMATIC DIAGRAMS, PARTS LISTS

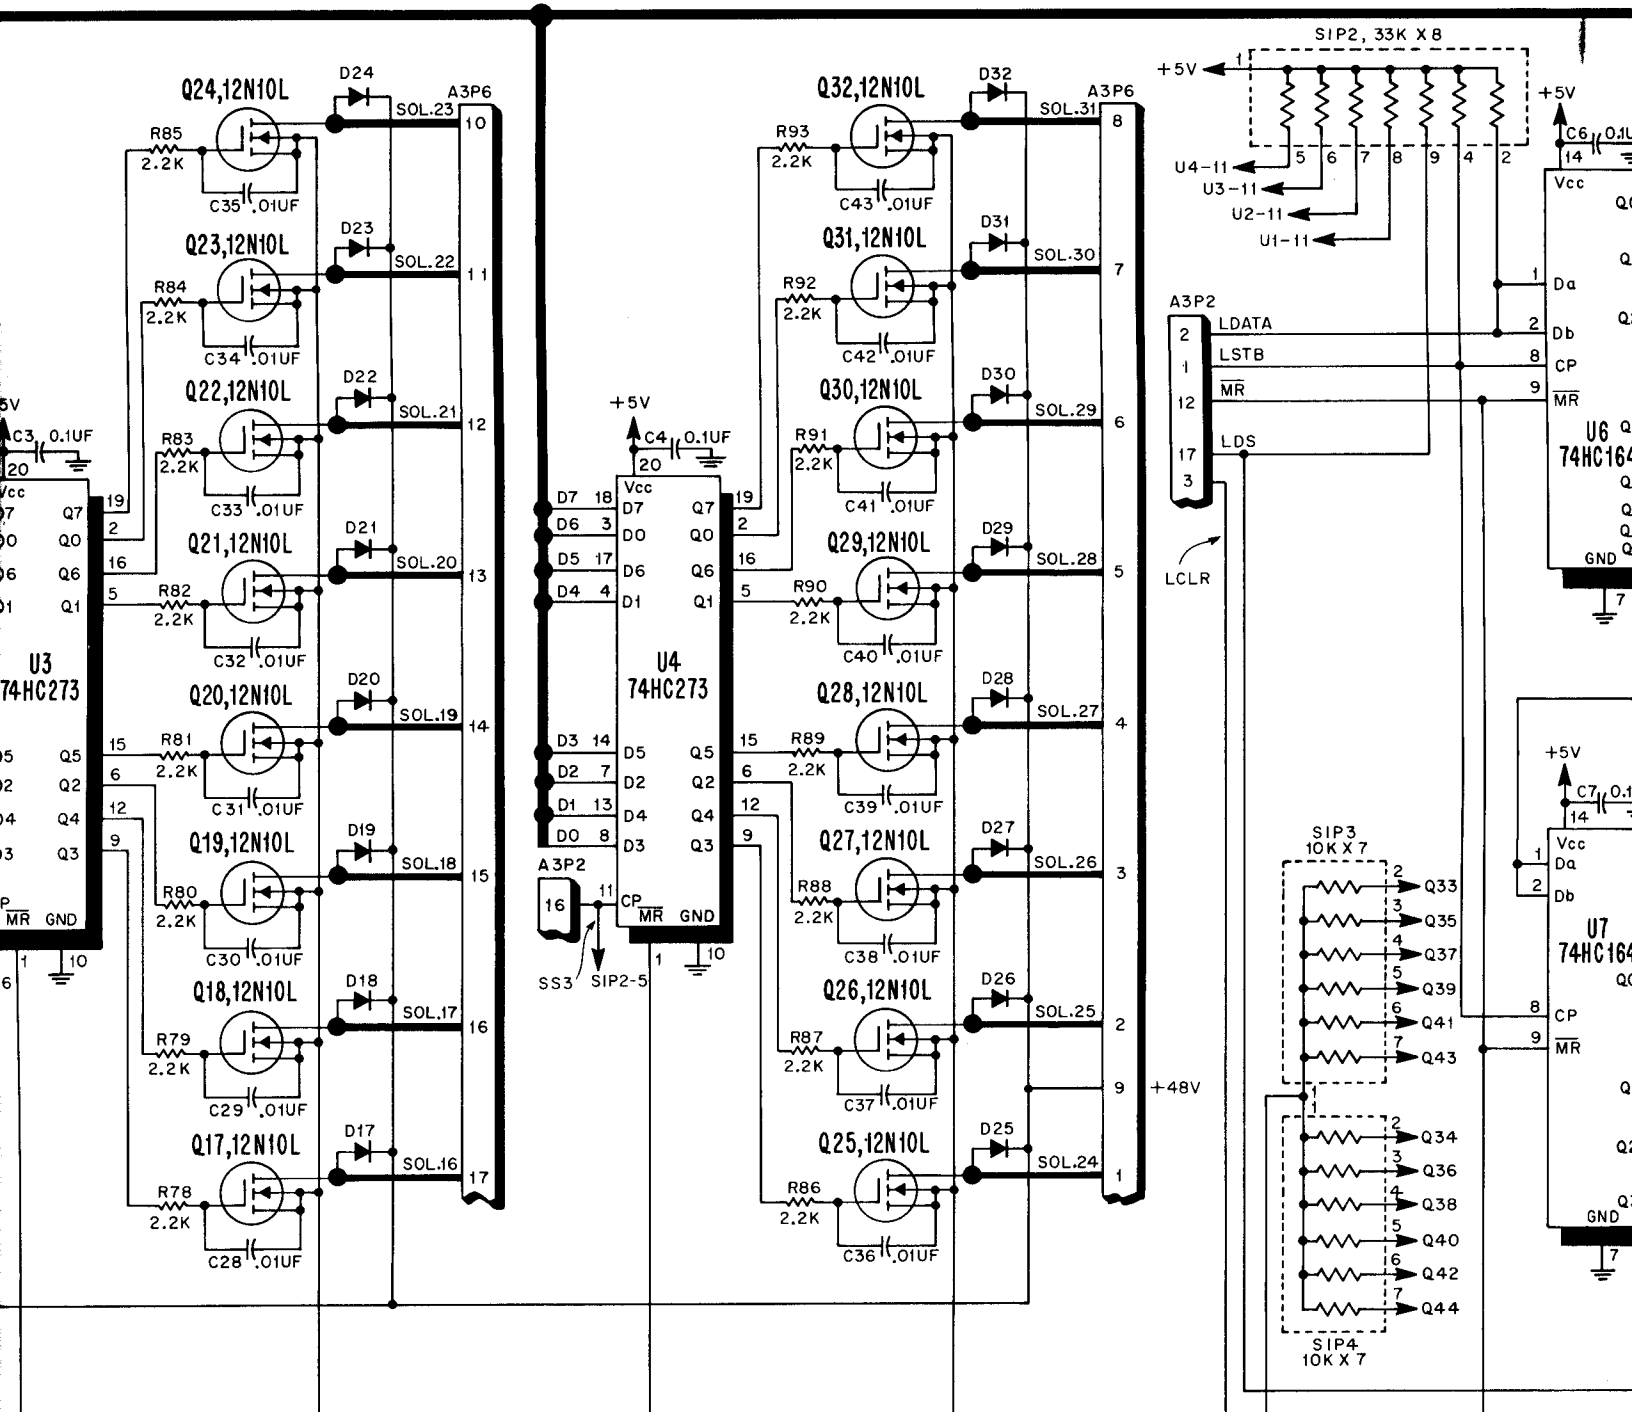


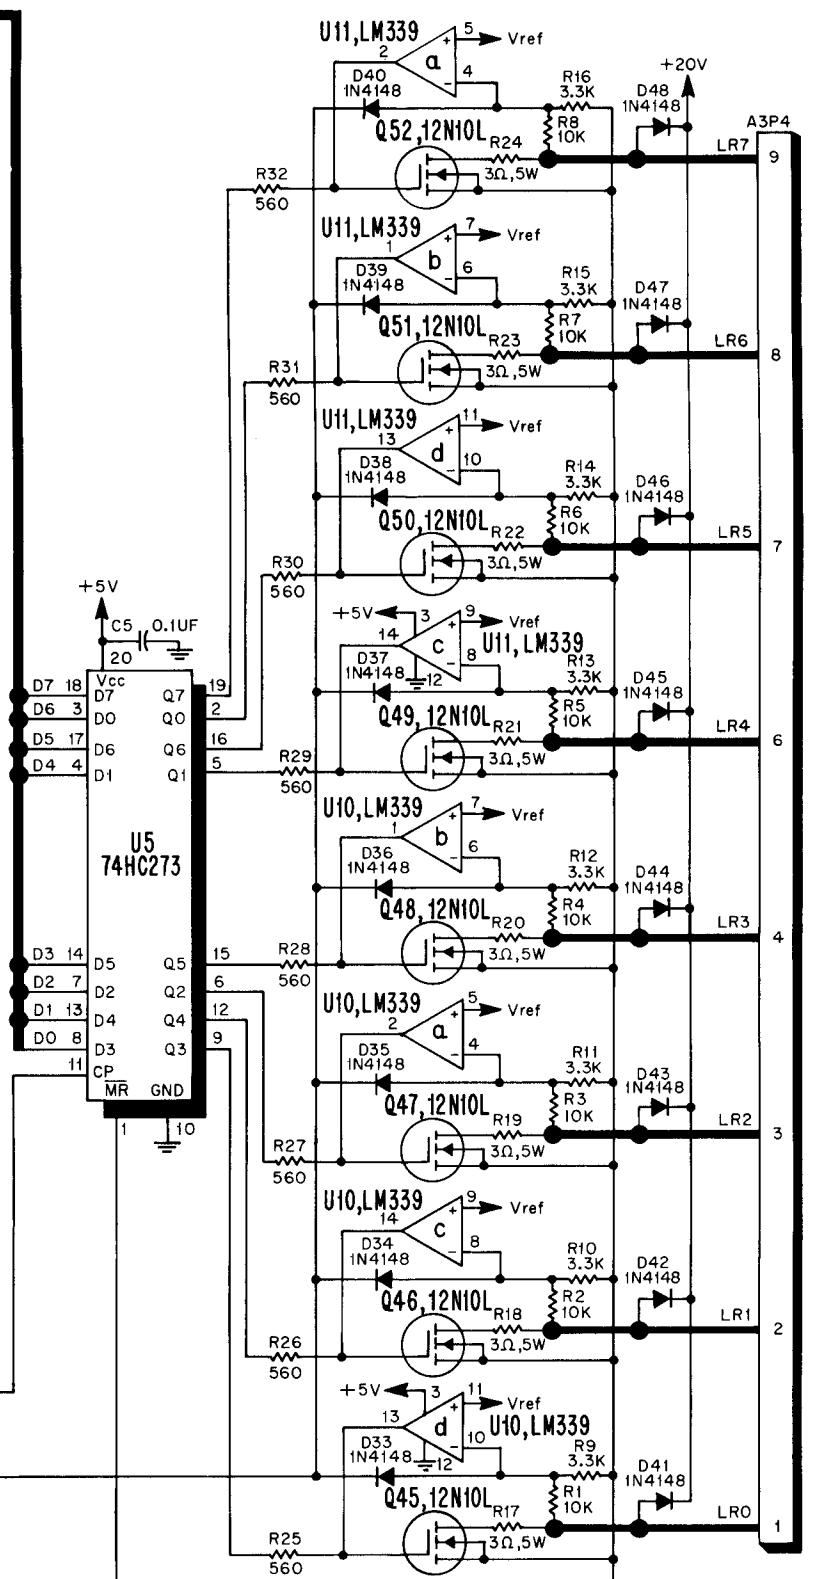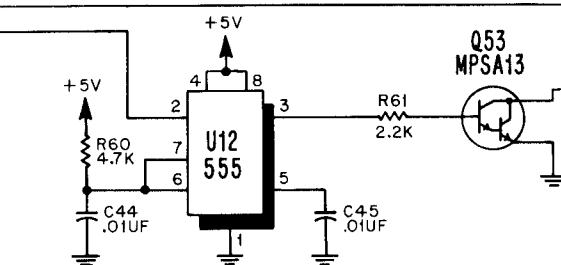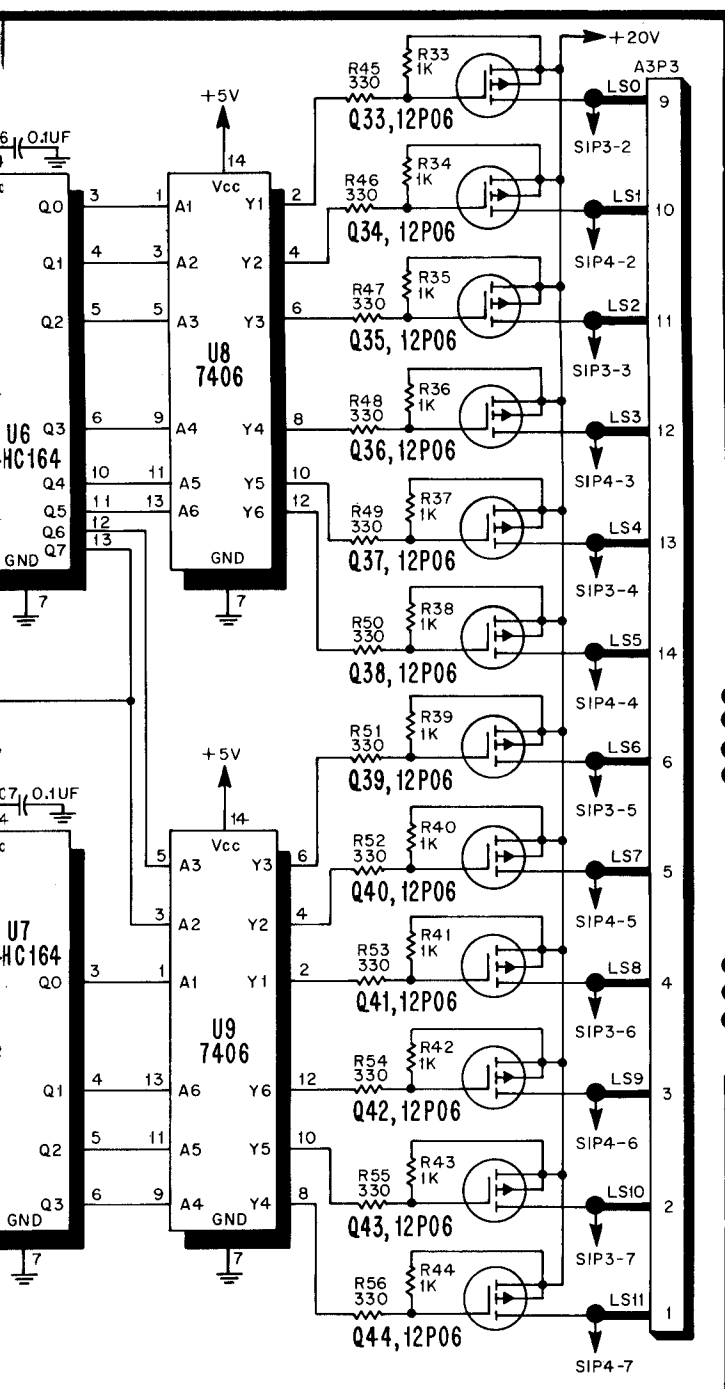

Premier Technology			
TITLE			
DRIVER BOARD (A3)			
SCHEMATIC DIAGRAM			
DRAWN	APPROVED	DATE	
R.P.S.	RHM	10-12-89	E-27034

VI. WIRING AND SCHEMATIC DIAGRAMS, PARTS LISTS


DRIVER BOARD (A3) COMPONENT LOCATION

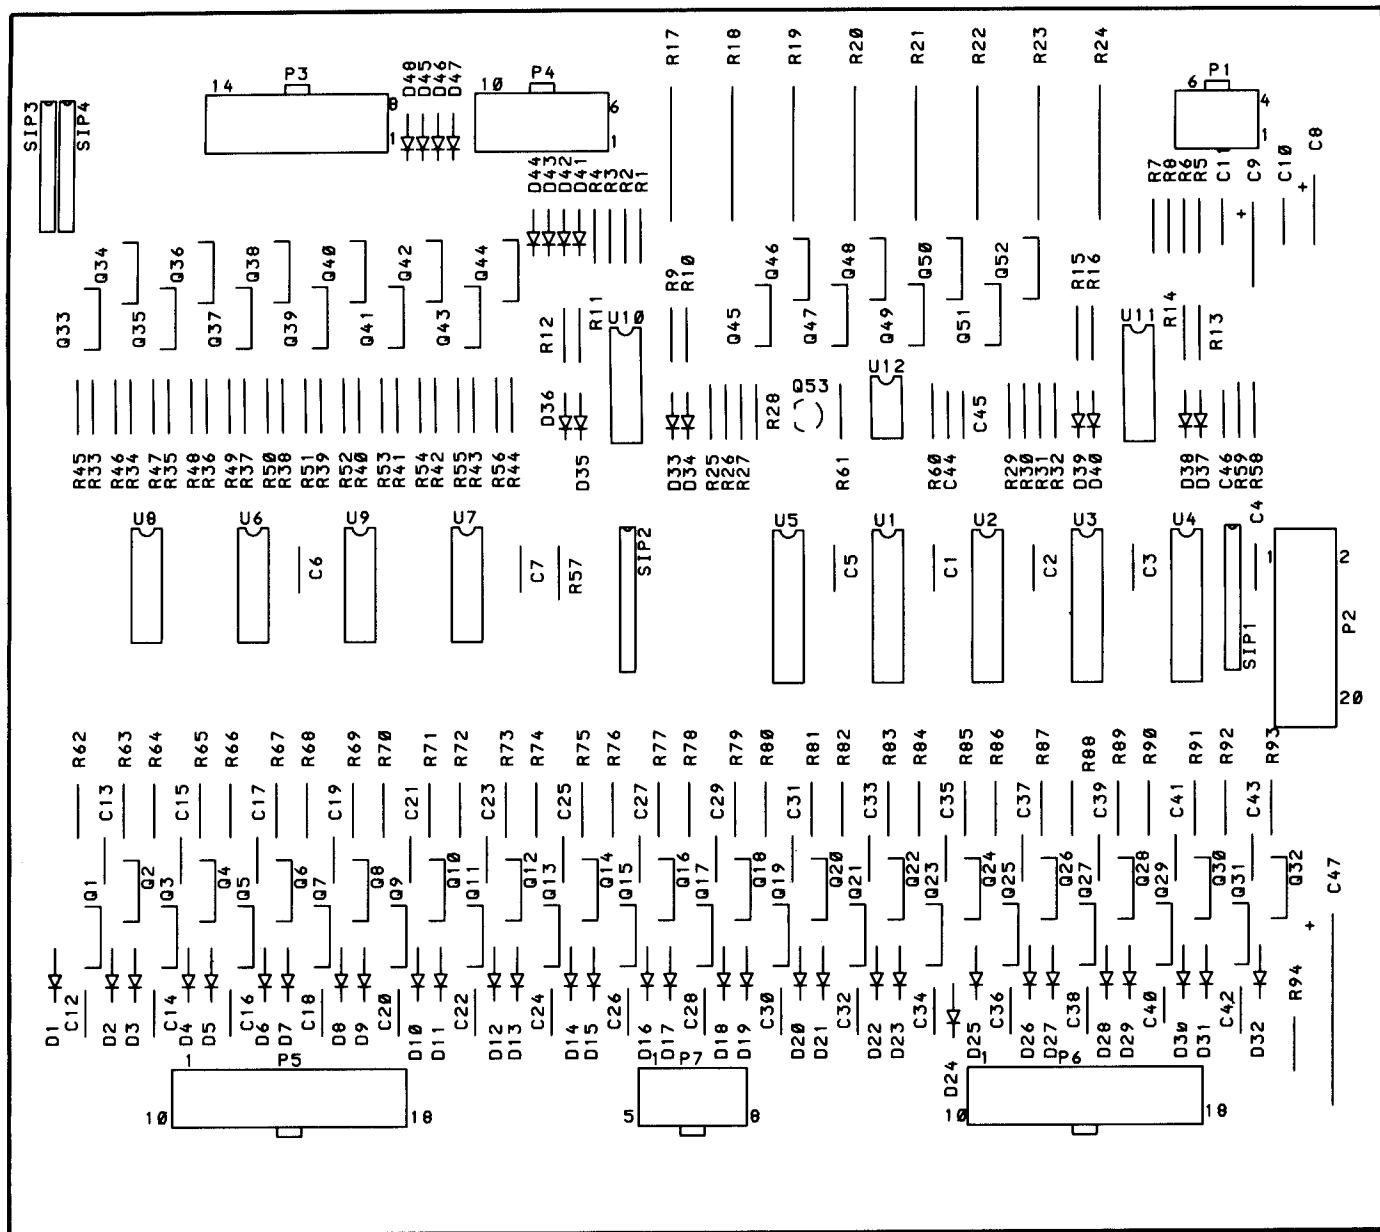





DRIVER BOARD (A3) PARTS LIST

REFERENCE	DESCRIPTION	PART NUMBER	REFERENCE	DESCRIPTION	PART NUMBER
C1-C7	Driver Board Assembly (A3)	MA-1358	R58	Resistor, 6.81K Ohm, 1%, 1/4W	XO-943
C8	Capacitor, 0.1 UF, +80% -20%, 50V	XO-230	R59	Resistor, 1K Ohm, 1%, 1/4W	XO-944
C9	Capacitor, 10UF, 20%, 25V	XO-127	R60	Resistor, 4.7K Ohm, 5%, 1/4W	XO-7
C10,C11	Capacitor, 10UF, +80% -20%, 25V	XO-225	R61-R93	Resistor, 2.2K Ohm, 5%, 1/4W	XO-27
C12-C44	Capacitor, .01UF, +80% -20%, 50V	XO-229	R94	Resistor, 27K Ohm, 5%, 1/4W	XO-11
C45,C46	Capacitor, .01UF, 10%, 50V	XO-696	SIP1	Resistor Pack, 4.7K Ohm X 8.5%, 1/4W	XO-161
C12-C44	Capacitor, 100UF, 20%, 100V	XO-958	SIP2	Resistor Pack, 33K Ohm X 8.5%, 1/4W	XO-945
C47	Diode, 1N4148	XO-261	SIP3	Resistor Pack, 10K Ohm X 7.5%, 1/4W	XO-926
D33-D48	Transistor, RFP12N10L, OR IRL530, N-Channel MOSFET	XO-947	SIP4		
Q1-Q32, Q45-Q52, Q54	Transistor, RFP12P06, IRF9531 OR MT2955 P-Channel MOSFET	XO-948	U1-U5	IC, Octal "D" Flip-Flops, 74HC273	XO-949
Q53	Transistor, MPSA13, Darlington	XO-304	U6-U7	IC, Shift Register, 74HC164	XO-950
R1-R8	Resistor, 10K Ohm, 5%, 1/4W	XO-18	U8-U9	IC, Buffer, 7406	XO-85
R9-R16	Resistor, 3.3K Ohm, 5%, 1/4W	XO-38	U10-U11	IC, Quad Comparator, LM339	XO-583
R17-R24	Resistor, 3 Ohm, 5%, 5W	XO-942	U12	IC, Timer, NE555	XO-631
R25-R32	Resistor, 560 Ohm, 5%, 1/4W	XO-36	A3P1	Header, 6 Position	XO-910
R33-R44	Resistor, 1K Ohm, 5%, 1/4W	XO-5	A3P2	Header, 20 Position (Ribbon)	XO-940
R45-R56	Resistor, 330 Ohm, 5%, 1/4W	XO-34	A3P3	Header, 14 Position	XO-914
R57	Resistor, 100K Ohm, 5%, 1/4W	XO-45	A3P4	Header, 10 Position	XO-912
			A3P5	Header, 18 Position	XO-916
			A3P6		
			A3P7	Header, 8 Position	XO-911

VI. WIRING AND SCHEMATIC

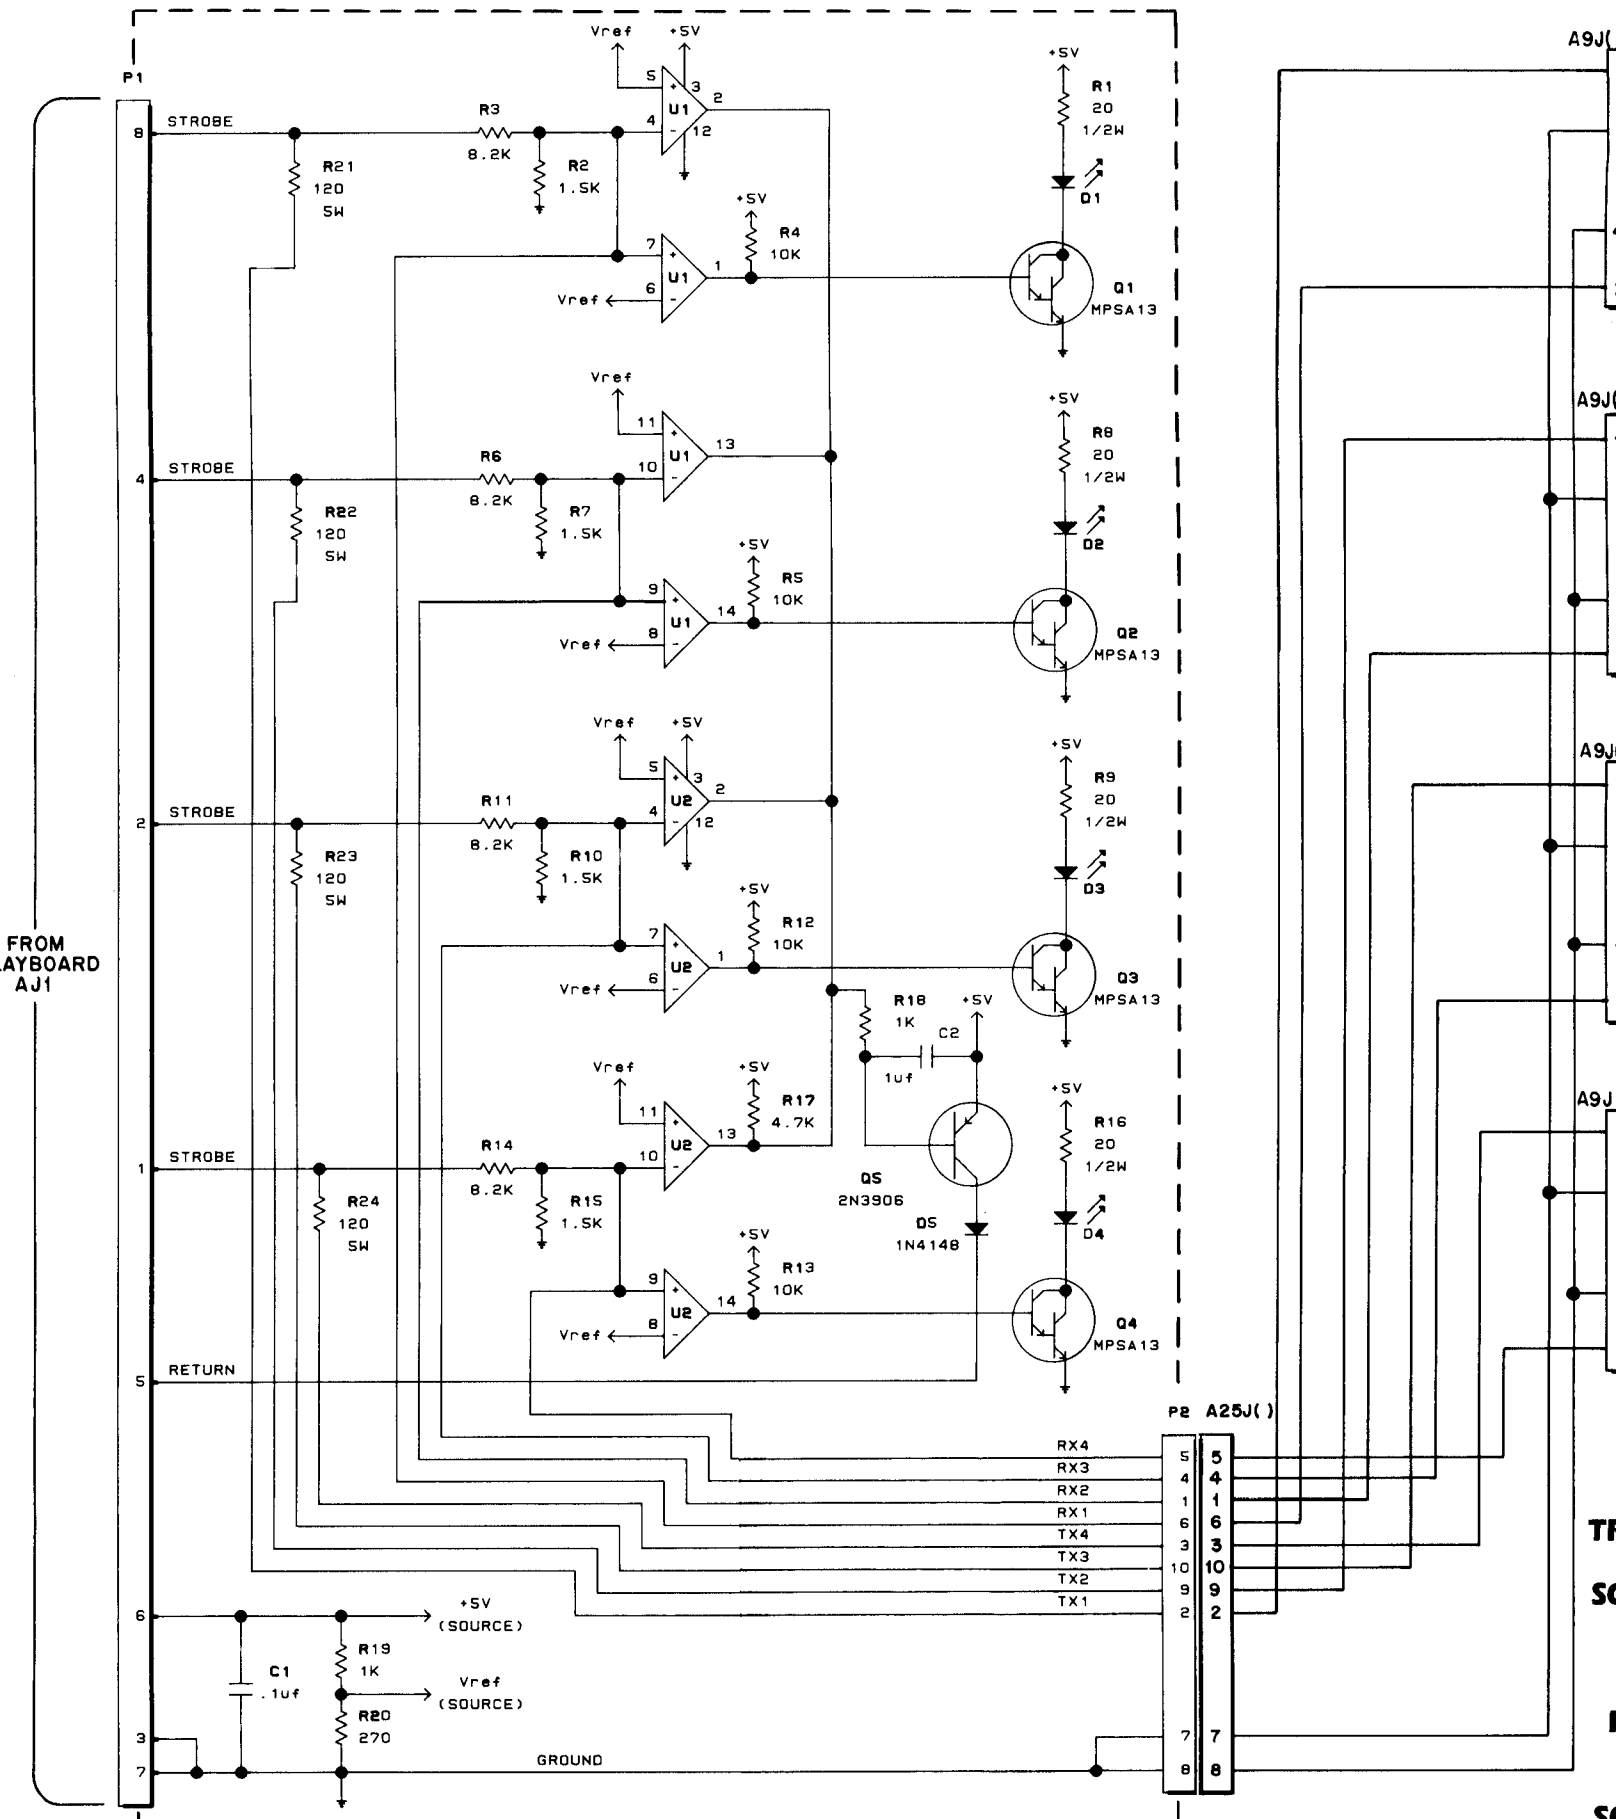


QUAD OPTICAL INTERFACE BOARD SCHEMATIC DIAGRAM

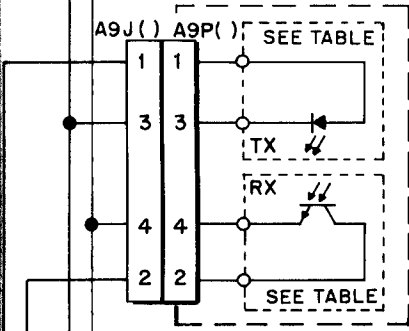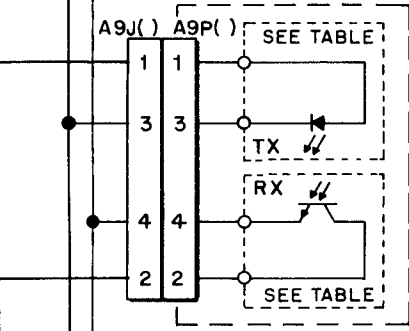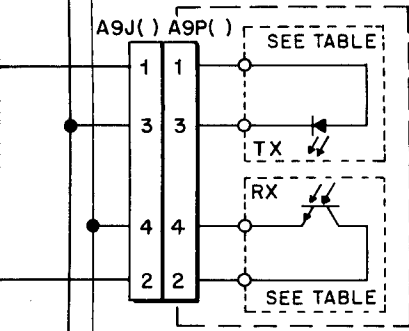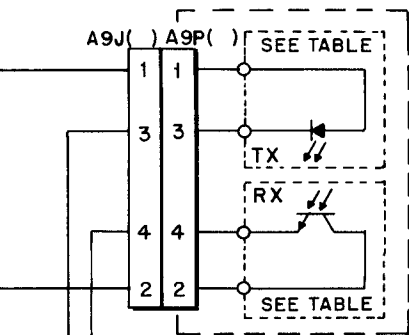

**OPTO LED
TRANSMITTER BOARD
(TX)
SCHEMATIC DIAGRAM
AND
OPTO
PHOTOTRANSISTOR
RECEIVER BOARD
(RX)
SCHEMATIC DIAGRAM**


OPTO LED TRANSMITTER BOARD COMPONENT LOCATION



OPTO LED TRANSMITTER BOARD PARTS LIST

REFERENCE	DESCRIPTION	PART NUMBER
TX	Opto LED Transmitter Assembly Plastic Transmitter LED	SEE TABLE XO-994

OPTO PHOTOTRANSISTOR RECEIVER BOARD COMPONENT LOCATION




OPTO PHOTOTRANSISTOR RECEIVER BOARD PARTS LIST

REFERENCE	DESCRIPTION	PART NUMBER
RX	Opto Phototransistor Receiver Assembly Plastic Phototransistor	SEE TABLE XO-993

BRACKET AND OPTO BOARD ASSEMBLY REFERENCES					
ASSEMBLY	CONNECTOR NO.	BRACKET NO.	LOCATION	TRANSMITTER	RECEIVER
30465	1A25J1-8	30461	TOP LEFT UPKICKER	MA-1330	MA-1331
30893	1A25J1-4	29662	LOWER LEFT RAMP	MA-1330	MA-1331
31219	1A25J1-2	29641	TOP LEFT RAMP	MA-1330	MA-1331
31235	1A25J1-1,5	31224	TOP RIGHT RAMP	MA-1330	MA-1331

NOTE: BRACKET AND OPTO BOARD ASSEMBLY DOES NOT INCLUDE WIRING HARNESS.


QUAD OPTICAL INTERFACE BOARD COMPONENT LOCATION

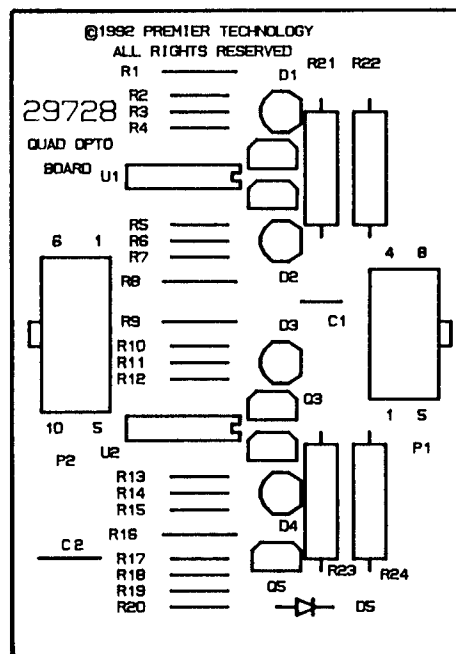


QUAD OPTICAL INTERFACE BOARD PARTS LIST

REFERENCE	DESCRIPTION	PART NUMBER
	QUAD OPTICAL INTERFACE BOARD (A25)	MA-1925
C1	CAPACITOR, 0.1UF, +80%-20%, 50V	XO-230
C2	CAPACITOR, 1UF, NON-POLAR, 50V	XO-746
D1-D4	DIODE, MV5752 (LED,RED)	XO-270
Q1-Q4	TRANSISTOR, NPN, MPS-A13	XO-304
Q5	TRANSISTOR, PNP, 2N3906	XO-588
R1,R8,R9,R16	RESISTOR, 20 OHM, 5%, 1/2W	XO-65
R2,R7,R10,R15	RESISTOR, 1.5K OHM, 5%, 1/4W	XO-20
R3,R6,R11,R14	RESISTOR, 8.2K OHM, 5%, 1/4W	XO-589
R4,R5,R12,R13	RESISTOR, 10K OHM, 5%, 1/4W	XO-18
R17	RESISTOR, 4.7K OHM, 5%, 1/4W	XO-7
R18,R19	RESISTOR, 1K OHM, 5%, 1/4W	XO-5
R20	RESISTOR, 270 OHM, 5%, 1/4W	XO-68
R21,R24	RESISTOR, 120 OHM, 10%, 5W	XO-1042
U1,U2	IC, QUAD COMPARATOR, LM339	XO-583
P1	HEADER, 8 POSITION	XO-911
P2	HEADER, 10 POSITION	XO-912
	SUPPORT, SRS-8-6N, (4)	23984

VI. WIRING AND SCHEMATIC DIAGRAMS, PARTS LISTS

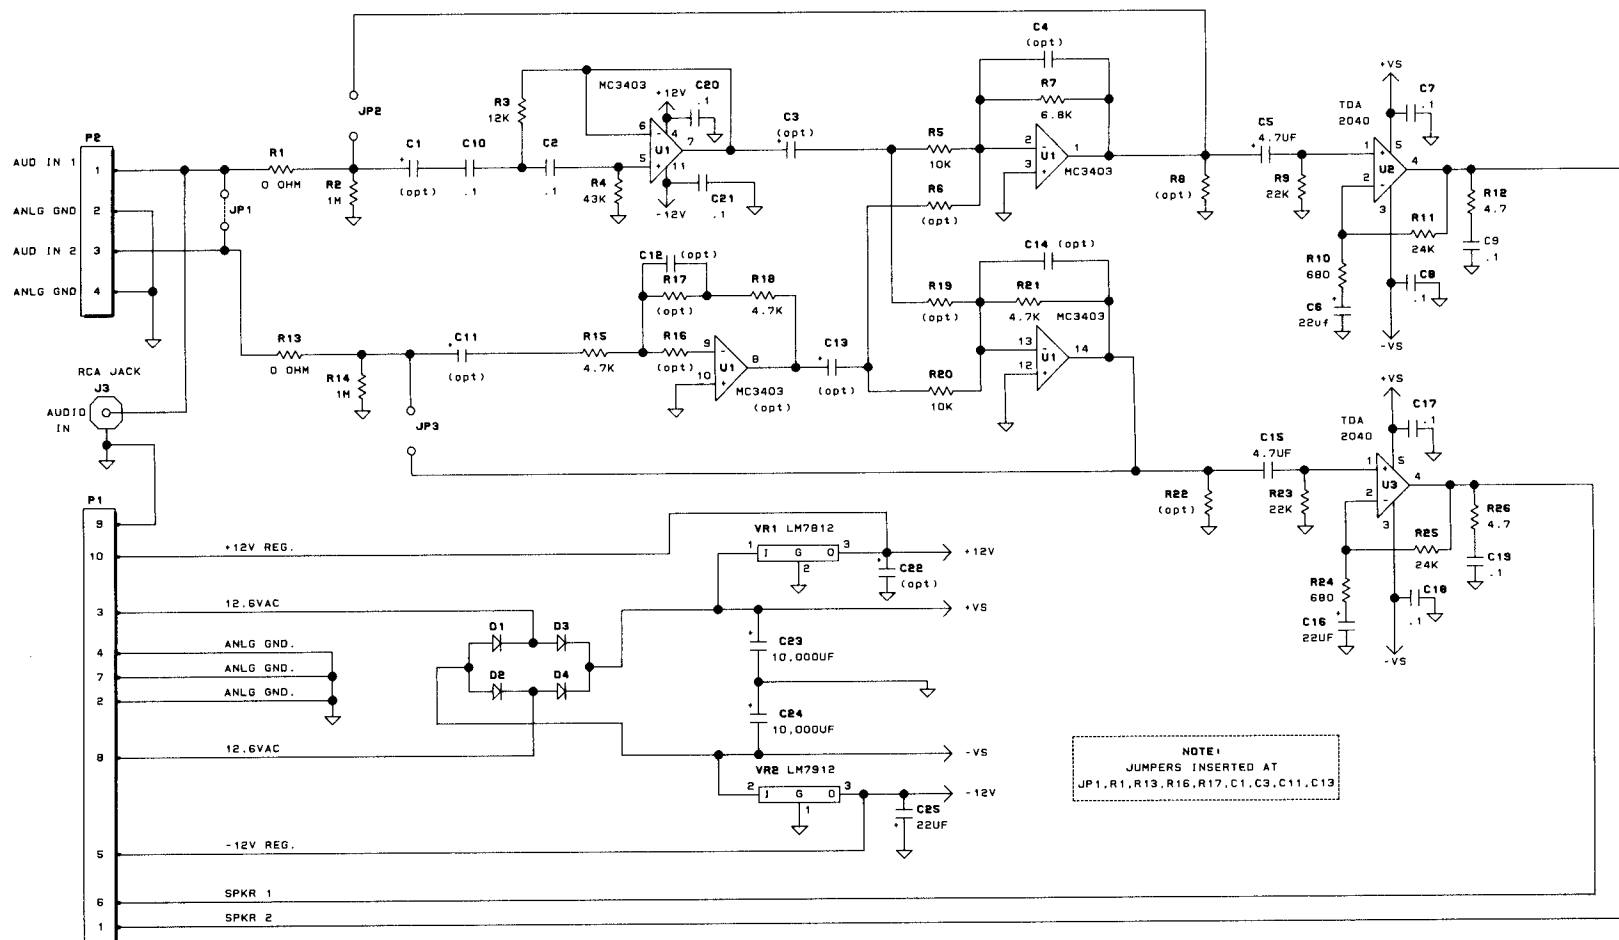


AUXILIARY POWER SUPPLY (A5) COMPONENT LOCATION

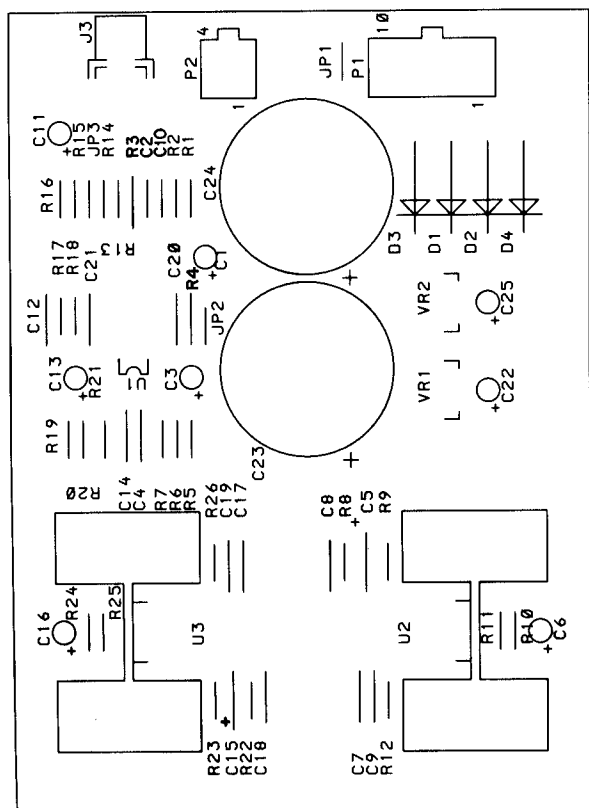



AUXILIARY POWER SUPPLY (A5) PARTS LIST

REFERENCE	DESCRIPTION	PART NUMBER
A5	AUXILLIARY POWER SUPPLY	MA-1772
C1, C3, C11, C13	CAPACITOR, 4.7UF, 10%, 10V	XO-469A
C2, C10	CAPACITOR, 0.1UF, 10%, 100V	XO-784
C5, C15	CAPACITOR, 4.7UF, 10%, 10V	XO-226
C6, C16, C25	CAPACITOR, 22UF, +80%-20%, 16V	XO-293
C7, C8, C9, C17, C18, C19, C20, C21	CAPACITOR, 0.1UF, +80%-20%, 50V	XO-230
C23, C24	CAPACITOR, 10,000UF, +80%-20%, 25V	XO-830
D1-D4	DIODE, 1N5401	XO-263
R1, R13, JP1, R16, R17	RESISTOR, 0 OHM, JUMPER	XO-469
R2, R14	RESISTOR, 1 MEGOHM, 5%, 1/4W	XO-604
R3	RESISTOR, 12K OHM, 5%, 1/4W	XO-9
R4	RESISTOR, 43K OHM, 5%, 1/4W	XO-15
R5, R20	RESISTOR, 10K OHM, 5%, 1/4W	XO-18
R7	RESISTOR, 6.8K OHM, 5%, 1/4W	XO-8
R8	RESISTOR, 2.2K OHM, 5%, 1/4W	XO-27
R9, R23	RESISTOR, 22K OHM, 5%, 1/4W	XO-42
R10, R24	RESISTOR, 680 OHM, 5%, 1/4W	XO-139
R11, R25	RESISTOR, 24K OHM, 5%, 1/4W	XO-10
R12, R26	RESISTOR, 4.7 OHM, 5%, 1/4W	XO-800
R15, R18, R21	RESISTOR, 4.7K OHM, 5%, 1/4W	XO-7
U1	IC, QUAD AMP, MC3403P	XO-953
U2, U3	IC, AUDIO AMPLIFIER, TDA2040	XO-1038
VR1	REGULATOR, +12V, LM7812CT	XO-1039
VR2	REGULATOR, -12V, LM7912CT	XO-130
J3	CONNECTOR, RCA	XO-1035
P1	HEADER, 10 POSITION	XO-912
	HEAT SINK	XO-1040

VI. WIRING AND SCHEMATIC D

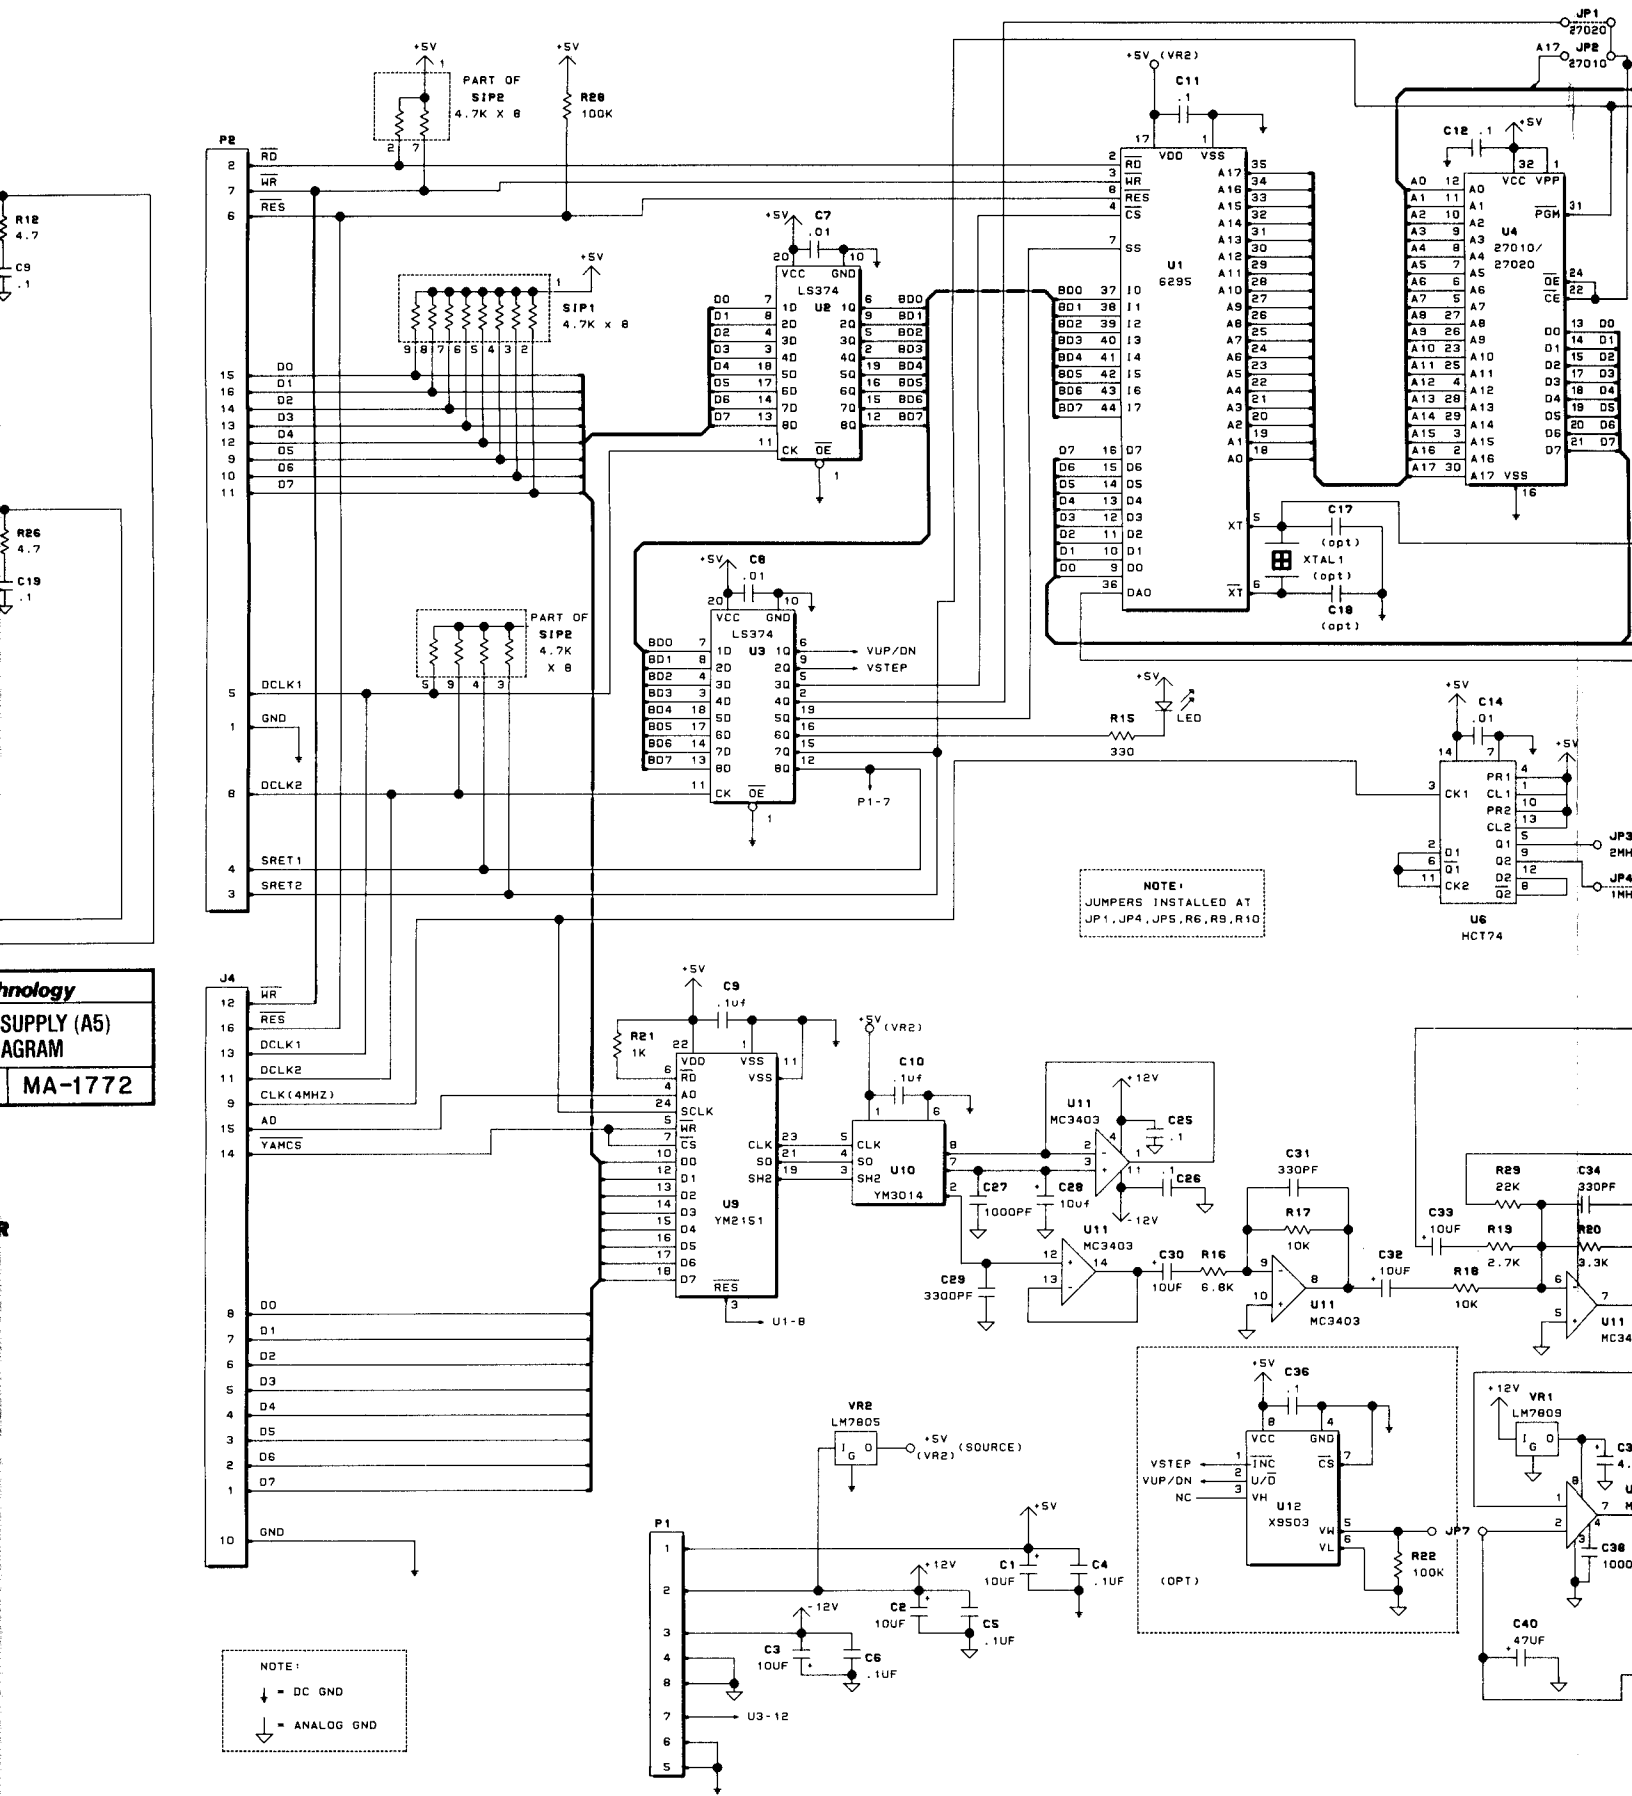


Premier Technology			
TITLE AUXILIARY SOUND BOARD (A20) SCHEMATIC DIAGRAM			
DRAWN J.B.	APPROVED RHM	DATE 4-8-92	MA-1770

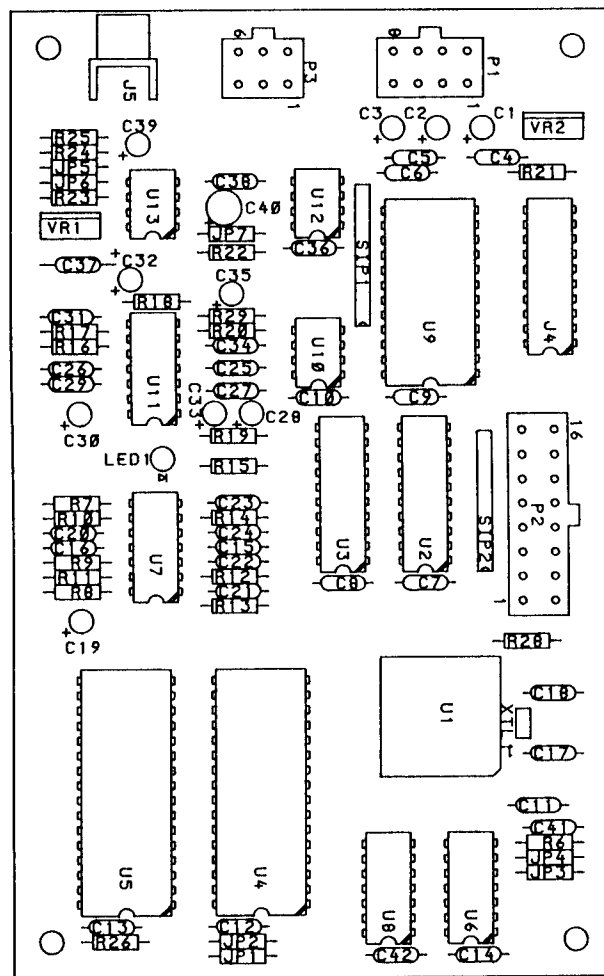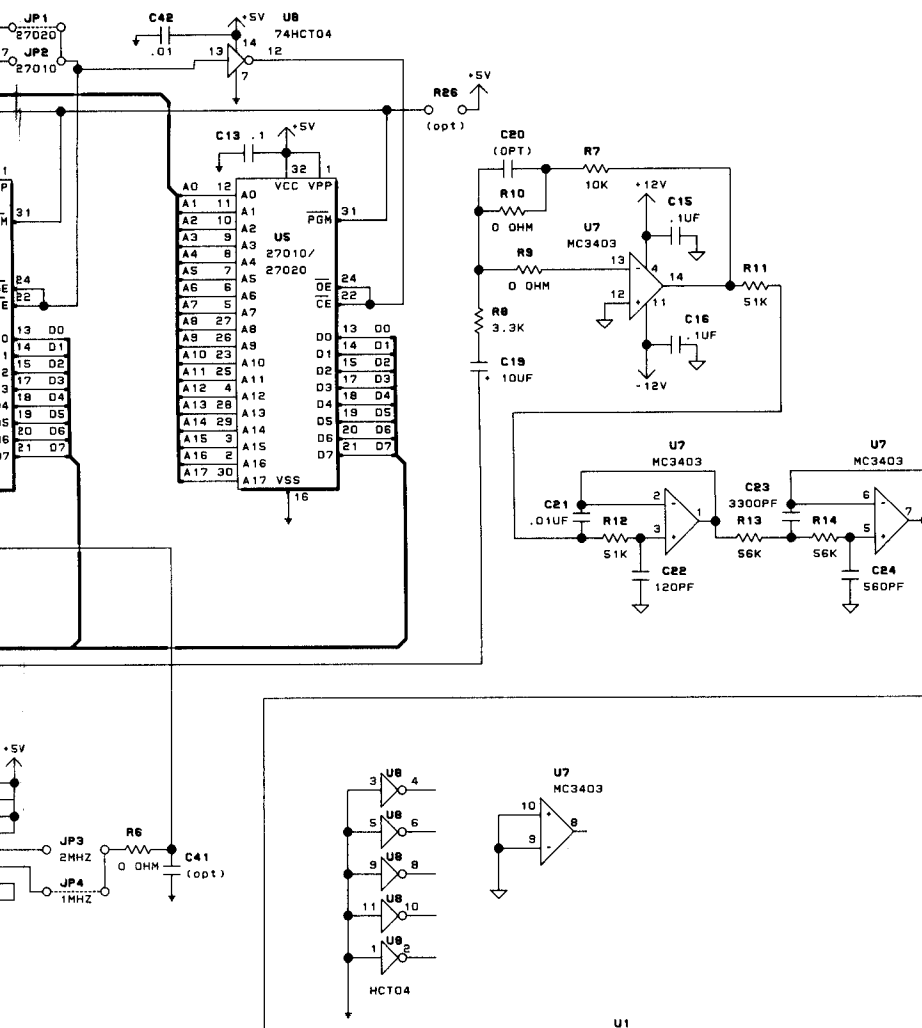

AUXILIARY SOUND BOARD (A20) PARTS LIST


REFERENCE	DESCRIPTION	PART NUMBER
A20	AUXILIARY SOUND BOARD	HA-1770
C1, C2, C3, C19, C28, C30, C32, C33, C35, C39	CAPACITOR, 10UF, +80%-20%, 16V	XO-1030
C4-C6, C9-C13, C15, C16, C25, C26, C36	CAPACITOR, 0.1UF, +80%-20%, 50V	XO-230
C7, C8, C14, C42	CAPACITOR, .01UF, 10%, 50V	XO-696
C21	CAPACITOR, 120PF, 10%, 50V	XO-1032
C22	CAPACITOR, 3300PF, 10%, 100V	XO-600
C23, C29	CAPACITOR, 330PF, 10%, 50V	XO-681
C24	CAPACITOR, 560PF, 10%, 50V	XO-1033
C31, C34	CAPACITOR, 4.7UF, 10%, 10V	XO-226
C37	CAPACITOR, 1000PF, 10%, 100V	XO-296
C38	CAPACITOR, 47UF, 10V	XO-227
C40	CAPACITOR, 10K OHM, 5%, 1/4W	XO-270
LED	DIODE, MV5752, RED	XO-18
R7, R17, R18	RESISTOR, 10K OHM, 5%, 1/4W	XO-38
R8, R20	RESISTOR, 3.3K OHM, 5%, 1/4W	XO-469
R6, R9, R10, JP1, JP4, JP5, R11, R12, R13, R14	RESISTOR, 51K OHM, 5%, 1/4W	XO-44
	RESISTOR, 56K OHM, 5%, 1/4W	XO-771
	RESISTOR, 330 OHM, 5%, 1/4W	XO-34
	RESISTOR, 6.8K OHM, 5%, 1/4W	XO-8
	RESISTOR, 2.7K OHM, 5%, 1/4W	XO-6
	RESISTOR, 1K OHM, 5%, 1/4W	XO-5
R21, R25	RESISTOR, 1MEG OHM, 5%, 1/4W	XO-604
R23	RESISTOR, 100K OHM, 5%, 1/4W	XO-45
R28	RESISTOR, 22K OHM, 5%, 1/4W	XO-42
R29	RESISTOR, 22K OHM, 5%, 1/4W	*XO-1023
U1	IC, MSM6295, SPEECH CHIP	XO-96
U2, U3	IC, 74LS374, OCTAL "D" FLIP-FLOP	
U4, U5	IC, 27C010 (SPECIFIED PER GAME)	XO-889
U6	IC, 74HCT74, "D" FLIP-FLOP	XO-953
U7, U11	IC, MC3403P, QUAD AMP	XO-1026
U8	IC, 74HCT04, HEX INVERTER	XO-882
U9	IC, YM2151, SOUND CHIP	XO-883
U10	IC, YM3014, SERIAL DAC	XO-1028
U13	IC, MC3340P, VCA, AMPLIFIER	XO-491
J4	SOCKET, 20 PIN	XO-1035
J5	JACK, RCA	XO-911
P1	HEADER, 8 POSITION	XO-910
P3	HEADER, 6 POSITION	XO-1036
U4, U5	SOCKET, 32 PIN	XO-529
U9	SOCKET, 24 PIN	27922
VR1	PCB ASSEMBLY, P/O *XO-1023	XO-1037
VR2	IC, LM7809CT, REGULATOR	XO-663
	IC, 5V REGULATOR	


SOUND BOARD (A6) COMPONENT LOCATION




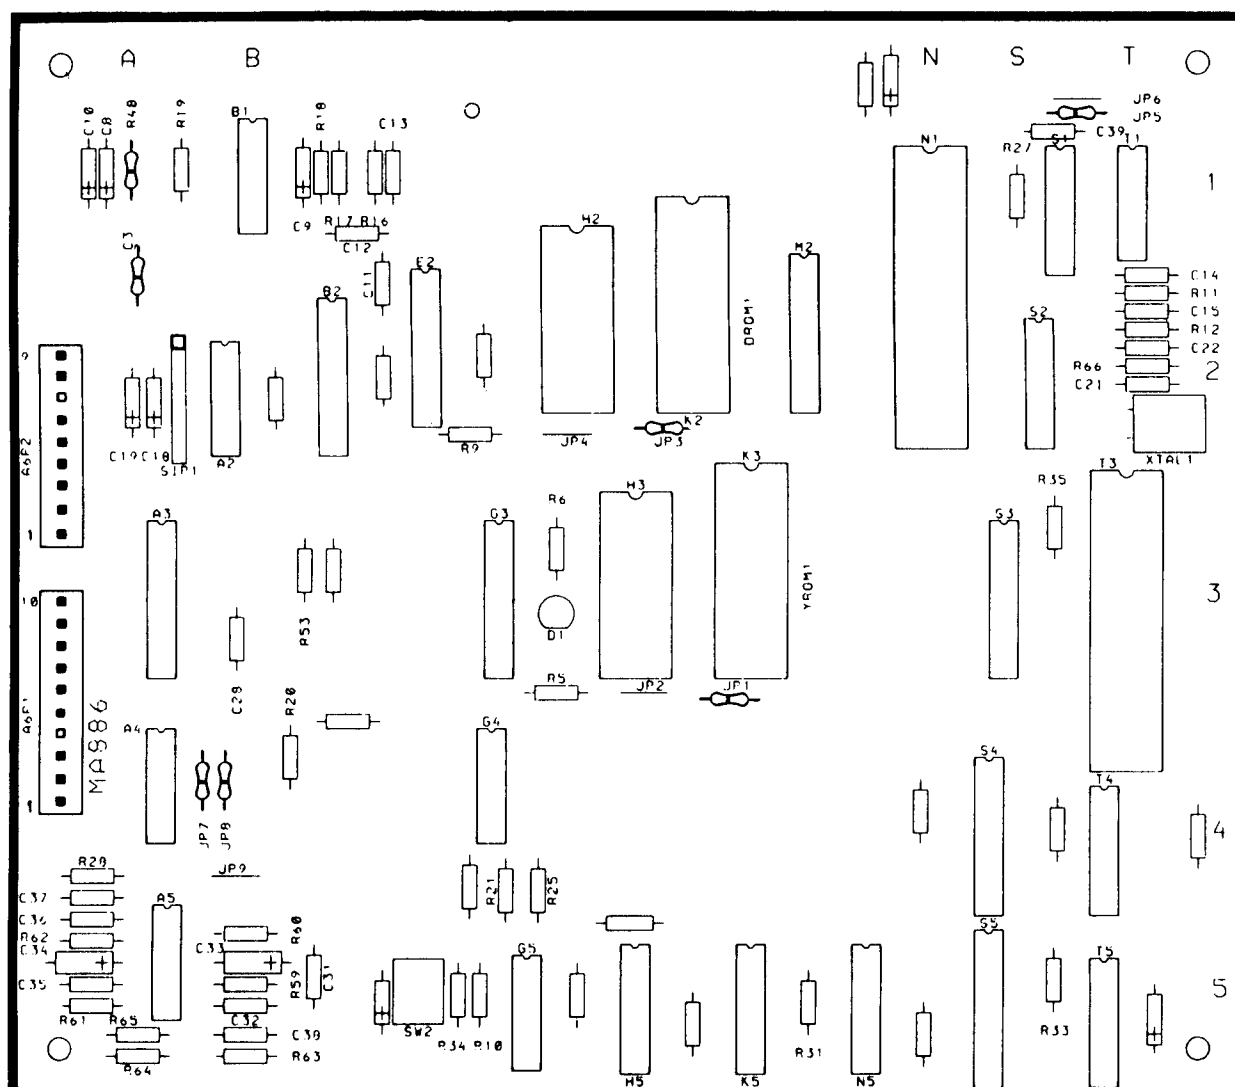



SOUND BOARD (A6) PARTS LIST

REFERENCE	DESCRIPTION	PART NUMBER	REFERENCE	DESCRIPTION	PART NUMBER
	Sound Board Assembly (1A6)	MA-1629	R20,R34	Resistor, 4.7K Ohm, 5%, 1/4W	XO-7
C13,C37	Capacitor, 1UF, 20%, 50V (Non-polar)	XO-746	R61-R64	Resistor, 33K Ohm, 5%, 1/4W	XO-43
C8,C9,C10,	Capacitor, 10UF, 20%, 25V (Tantalum)	XO-127	R59,R60	Resistor, 100K Ohm, 5%, 1/4W	XO-45
C18,C19,			R65	Resistor, 27K Ohm, 5%, 1/4W	XO-11
C33,C34			A2	IC, 7430, 8 Input NAND Gate	XO-643
AND THREE			A3,B2,S5	IC, 74LS374, Octal "D" Flip Flop	XO-96
UNMARKED			A4	IC, 74LS74, Dual "D" Flip Flop	XO-434
CAPACITORS			A5,B1	IC, MC3403P, Quad Op-Amp	XO-953
C11,C12	Capacitor, 10PF, +80%-20%, 50V	XO-635	E2	IC, AD7528J, Multiplier DAC	XO-647
C14,C22	Capacitor, 33PF, 10%, 100V	XO-896	G3	IC, 74LS377, Octal "D" Flip Flop	XO-97
C15	Capacitor, .047UF, 20%, 50V	XO-638	G4,T1	IC, 74LS04, Hex Inverter	XO-418
C21	Capacitor, 22PF, 10%, 50V	XO-633	G5	IC, 74HC08, Quad 2 Input "AND" Gate	XO-872
C28 AND	Capacitor, 0.1UF, +80%-20%, 50V	XO-230	H2,H3	IC, 6116LP-15, 2K X 8 RAM	XO-928
FIFTEEN			H5,K5,N5	IC, 74LS161, Synchronous Presettable Binary Counter	XO-440
UNMARKED			S1,T5		
CAPACITORS			K2,K3	IC, Specified Per Game	XO-79
C31,C32	Capacitor, 0.1UF, 10%, 100V	XO-784	M2	IC, 74LS245, Octal Bus Transceiver	XO-893
C35	Capacitor, 1000PF, 10%, 100V	XO-296	N1,T3	IC, 65C02P2 or 6502A, CPU	XO-927 or
C36	Capacitor, 2200PF, 10%, 100V	XO-289	S2	IC, 74LS139, Dual 1 of 4 Decoder	XO-419
C38	Capacitor, .0033UF, 10%, 100V	XO-600	S3	IC, 74HCT245, Octal Bus Transceiver	XO-891
C39	Capacitor, 220PF, 10%, 100V	XO-694	T4	IC, 74P138, 1 of 8 Decoder	XO-1041
D1	Diode, MV5752, (LED, Red)	XO-270	SIP 1	Resistor Pack 1K Ohm X 8	XO-493
R5,R9,R10,	Resistor, 1K Ohm, 5%, 1/4W	XO-5	SW2	Switch, Pushbutton	XO-897
R27,R28,R31,			XTAL 1	Crystal, 4 MHZ	XO-366
R33,R35			A6P1,A6P2	Connector (2)	XO-879
R6	Resistor, 240 Ohm, 5%, 1/4W	XO-173			
R11,R12	Resistor, 470 Ohm, 5%, 1/4W	XO-35		28 Pin Dip Socket (2)	XO-536
R21, R25	Resistor, 3K Ohm, 5%, 1/4W	XO-23		Jumper, Resistor, 0 OHM (7)	XO-469
R16,R17	Resistor, 10K Ohm, 5%, 1/4W	XO-18		20 Pin Dip Socket	XO-491
R18	Resistor, 6.8K Ohm, 5%, 1/4W	XO-8			

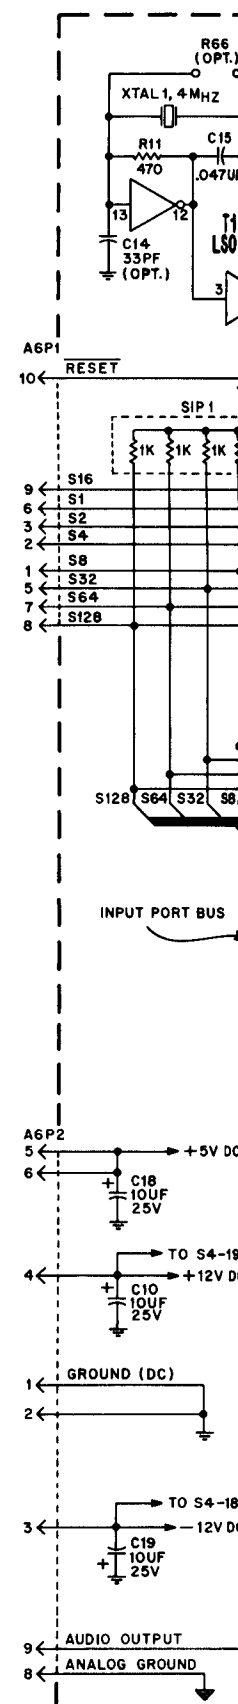


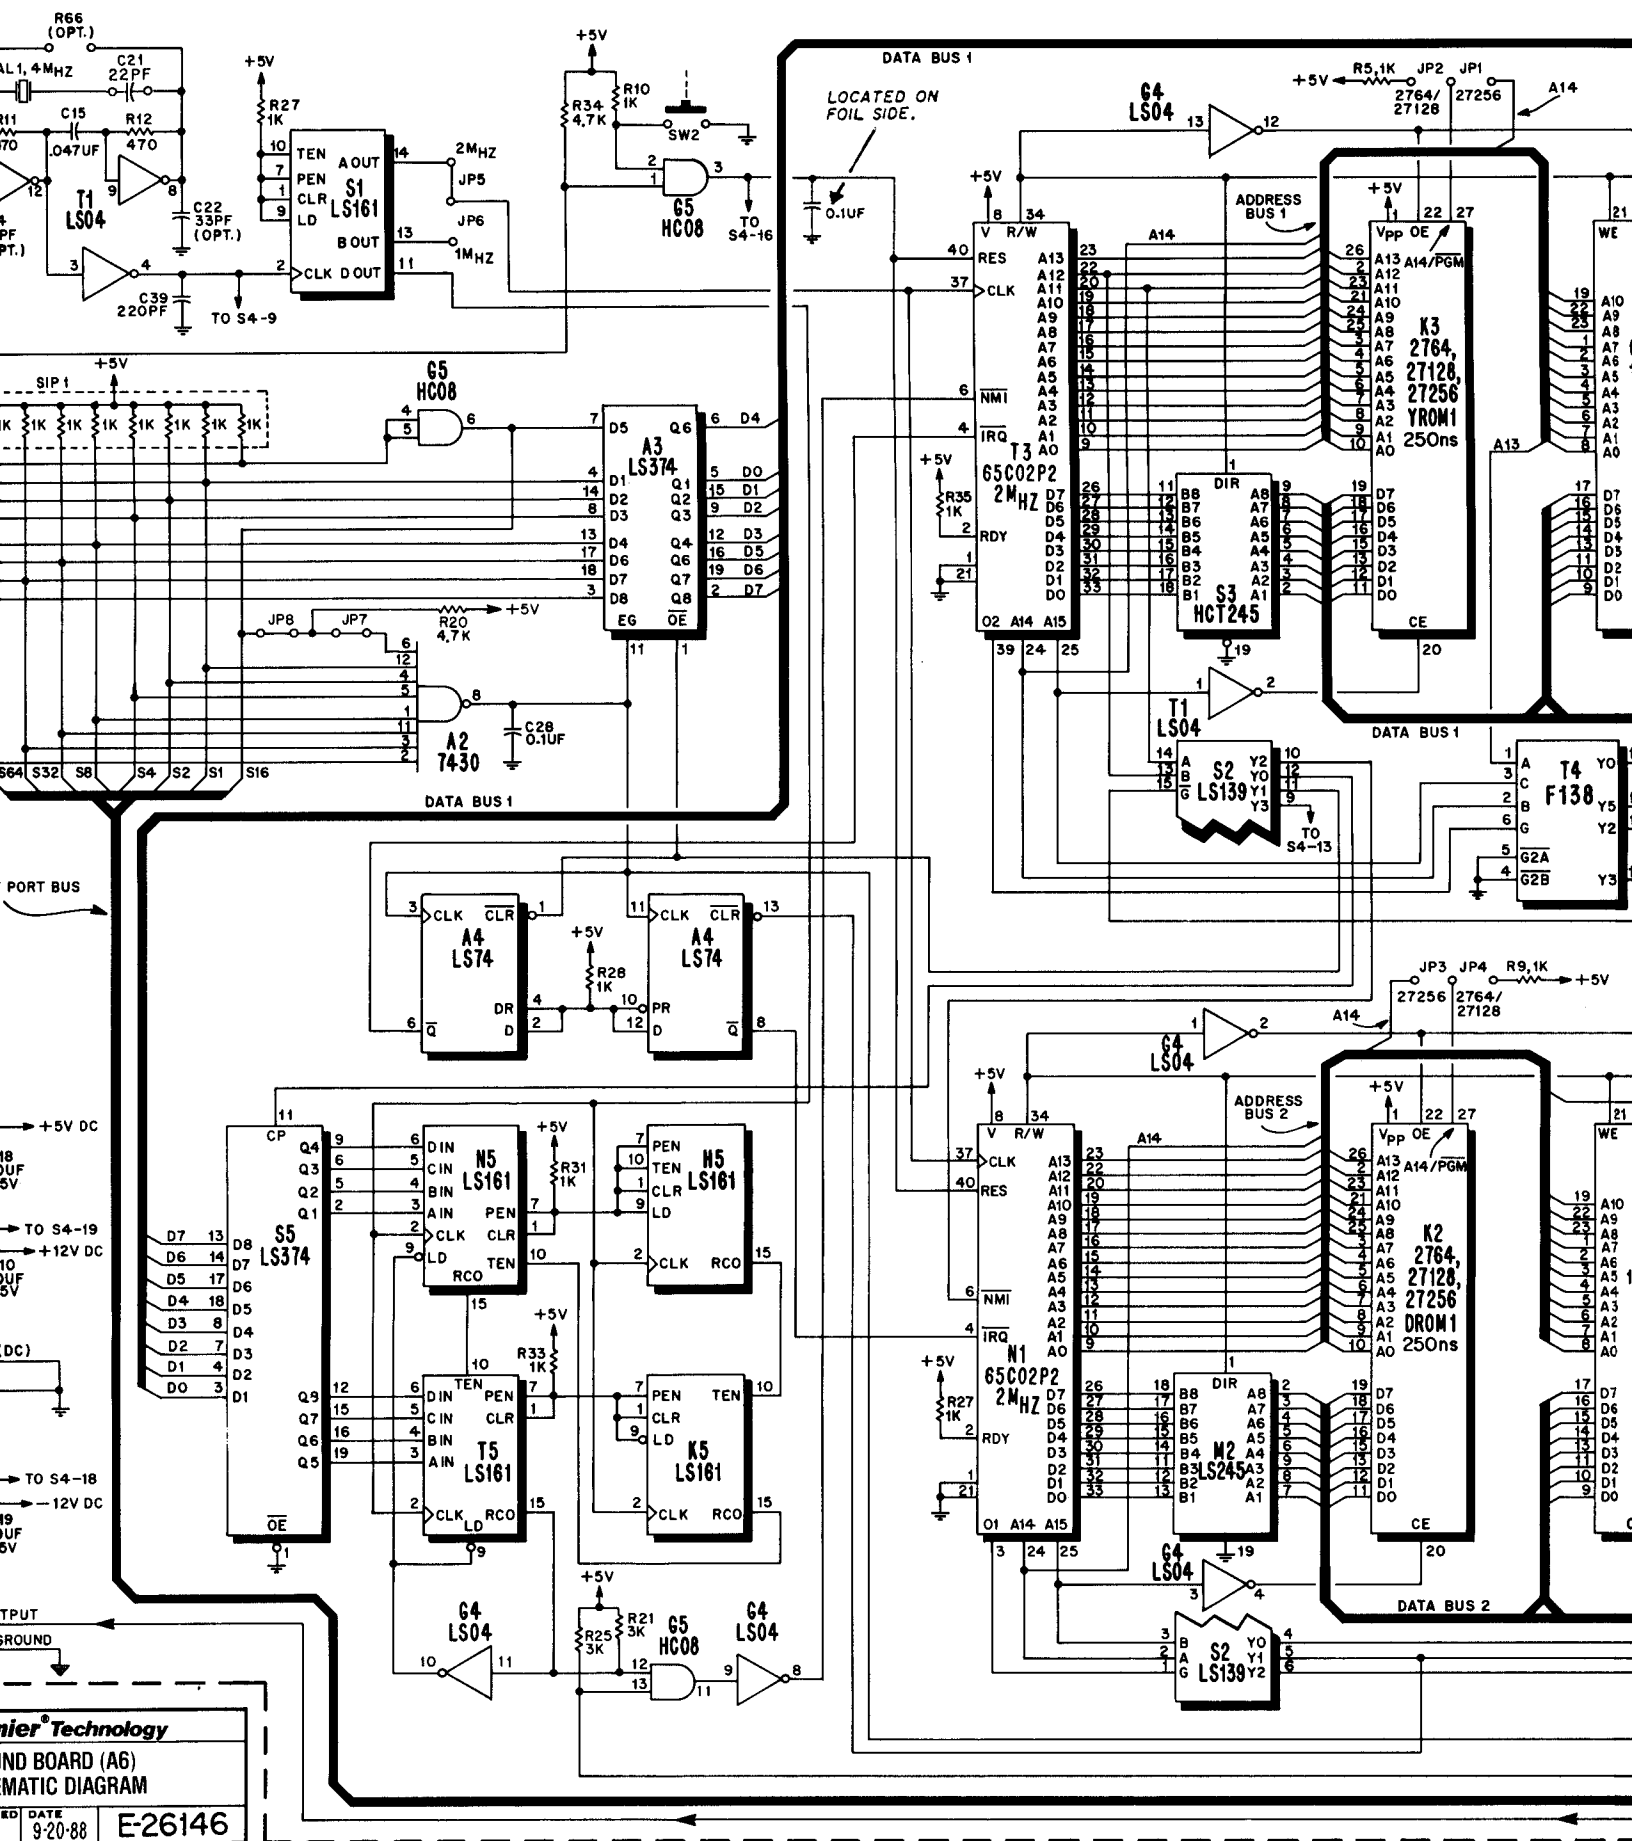


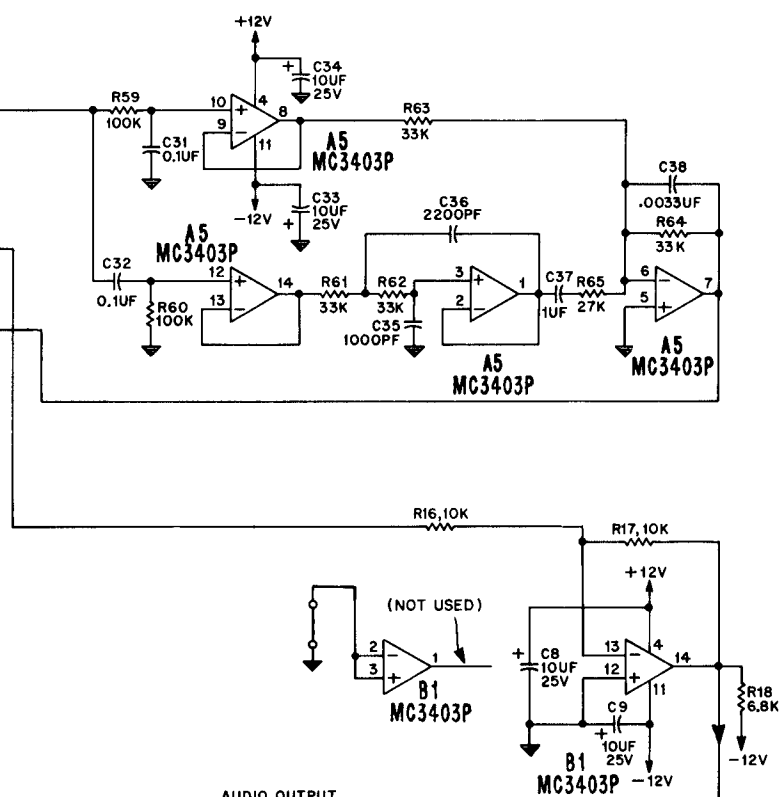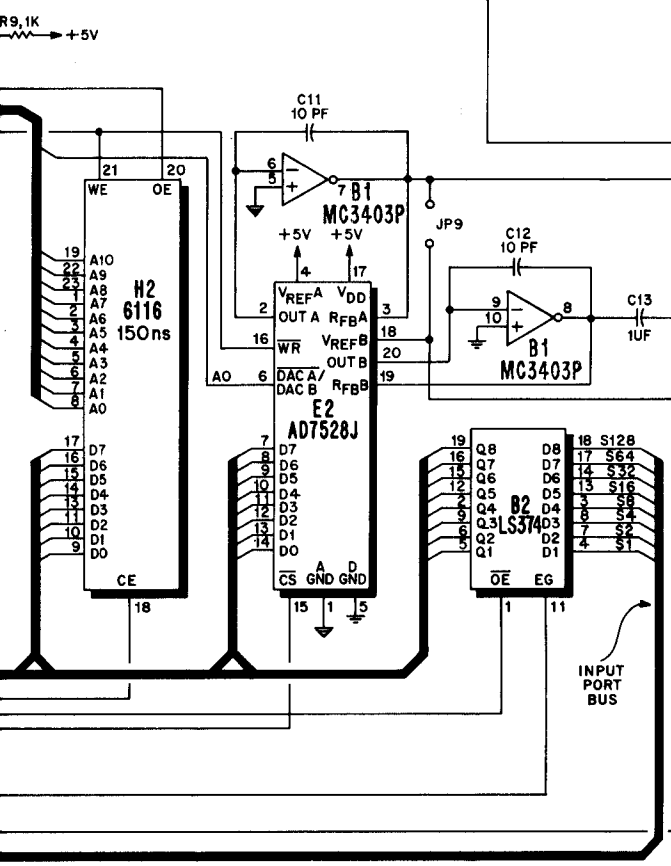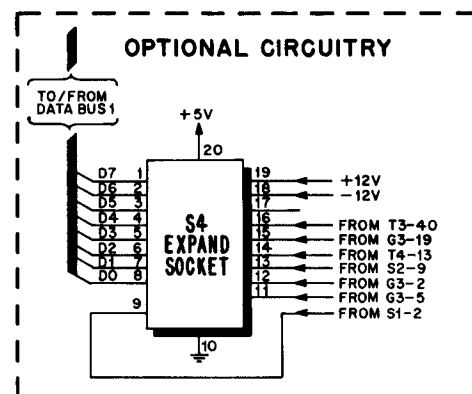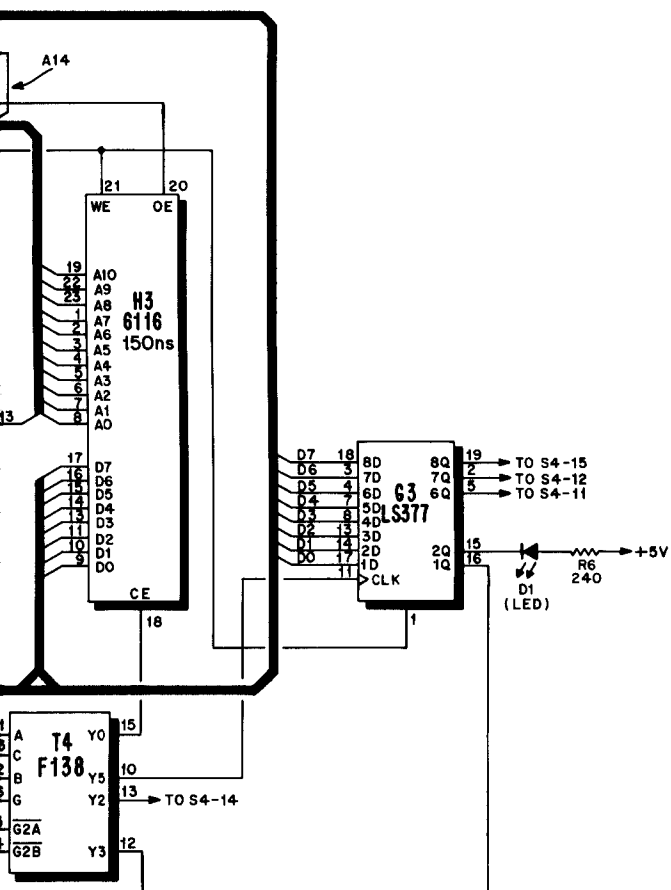

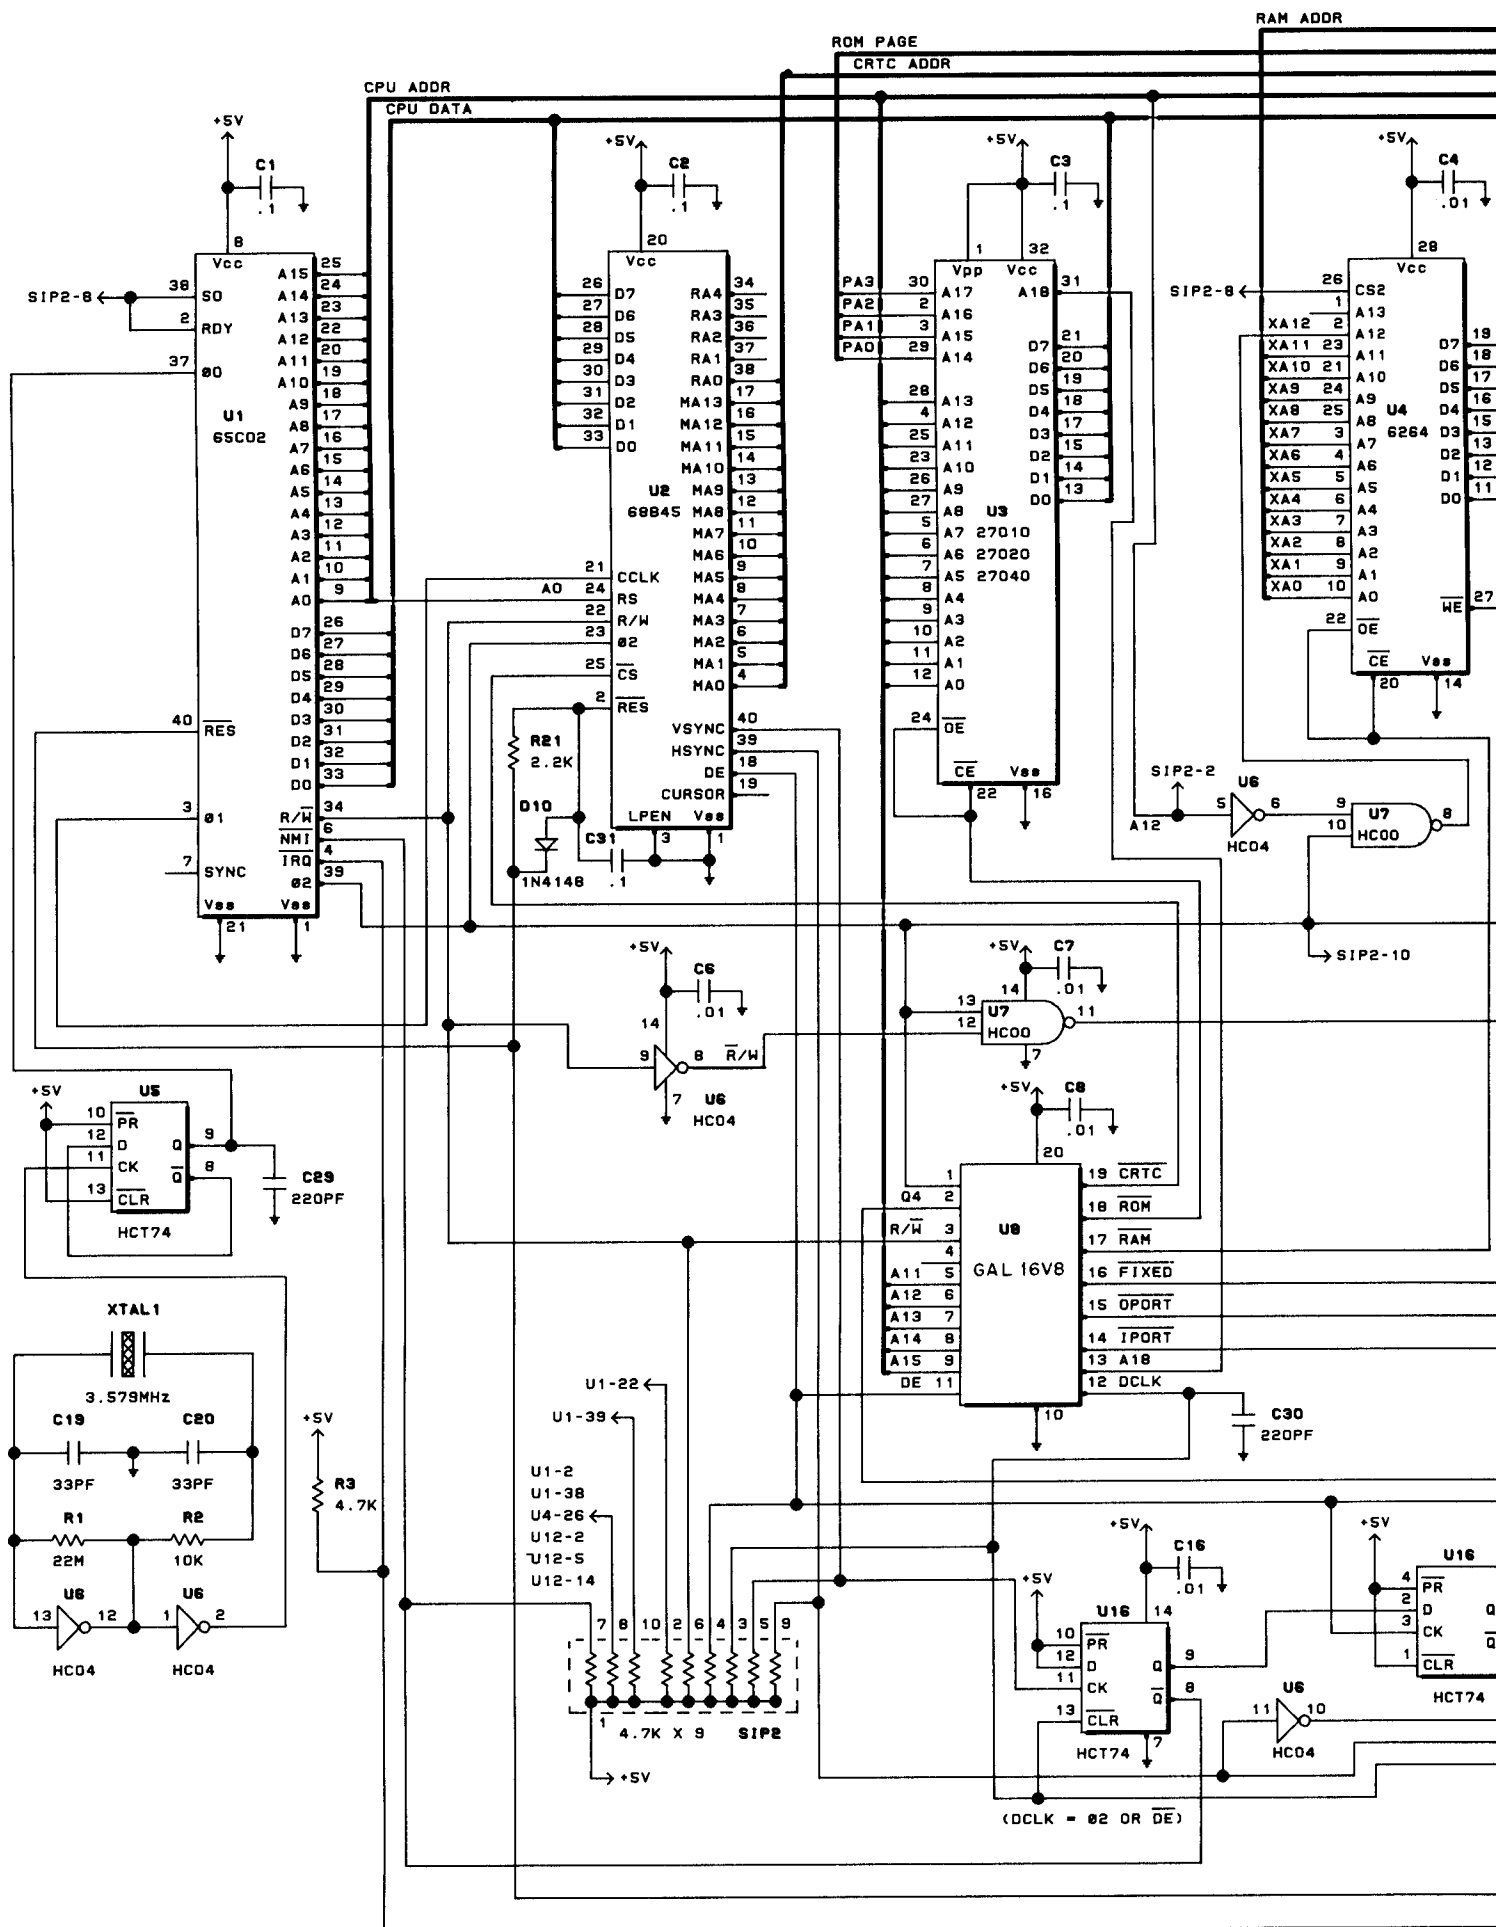

VI. WIRING AND SCHEMATIC DIAGRAMS, PARTS LISTS

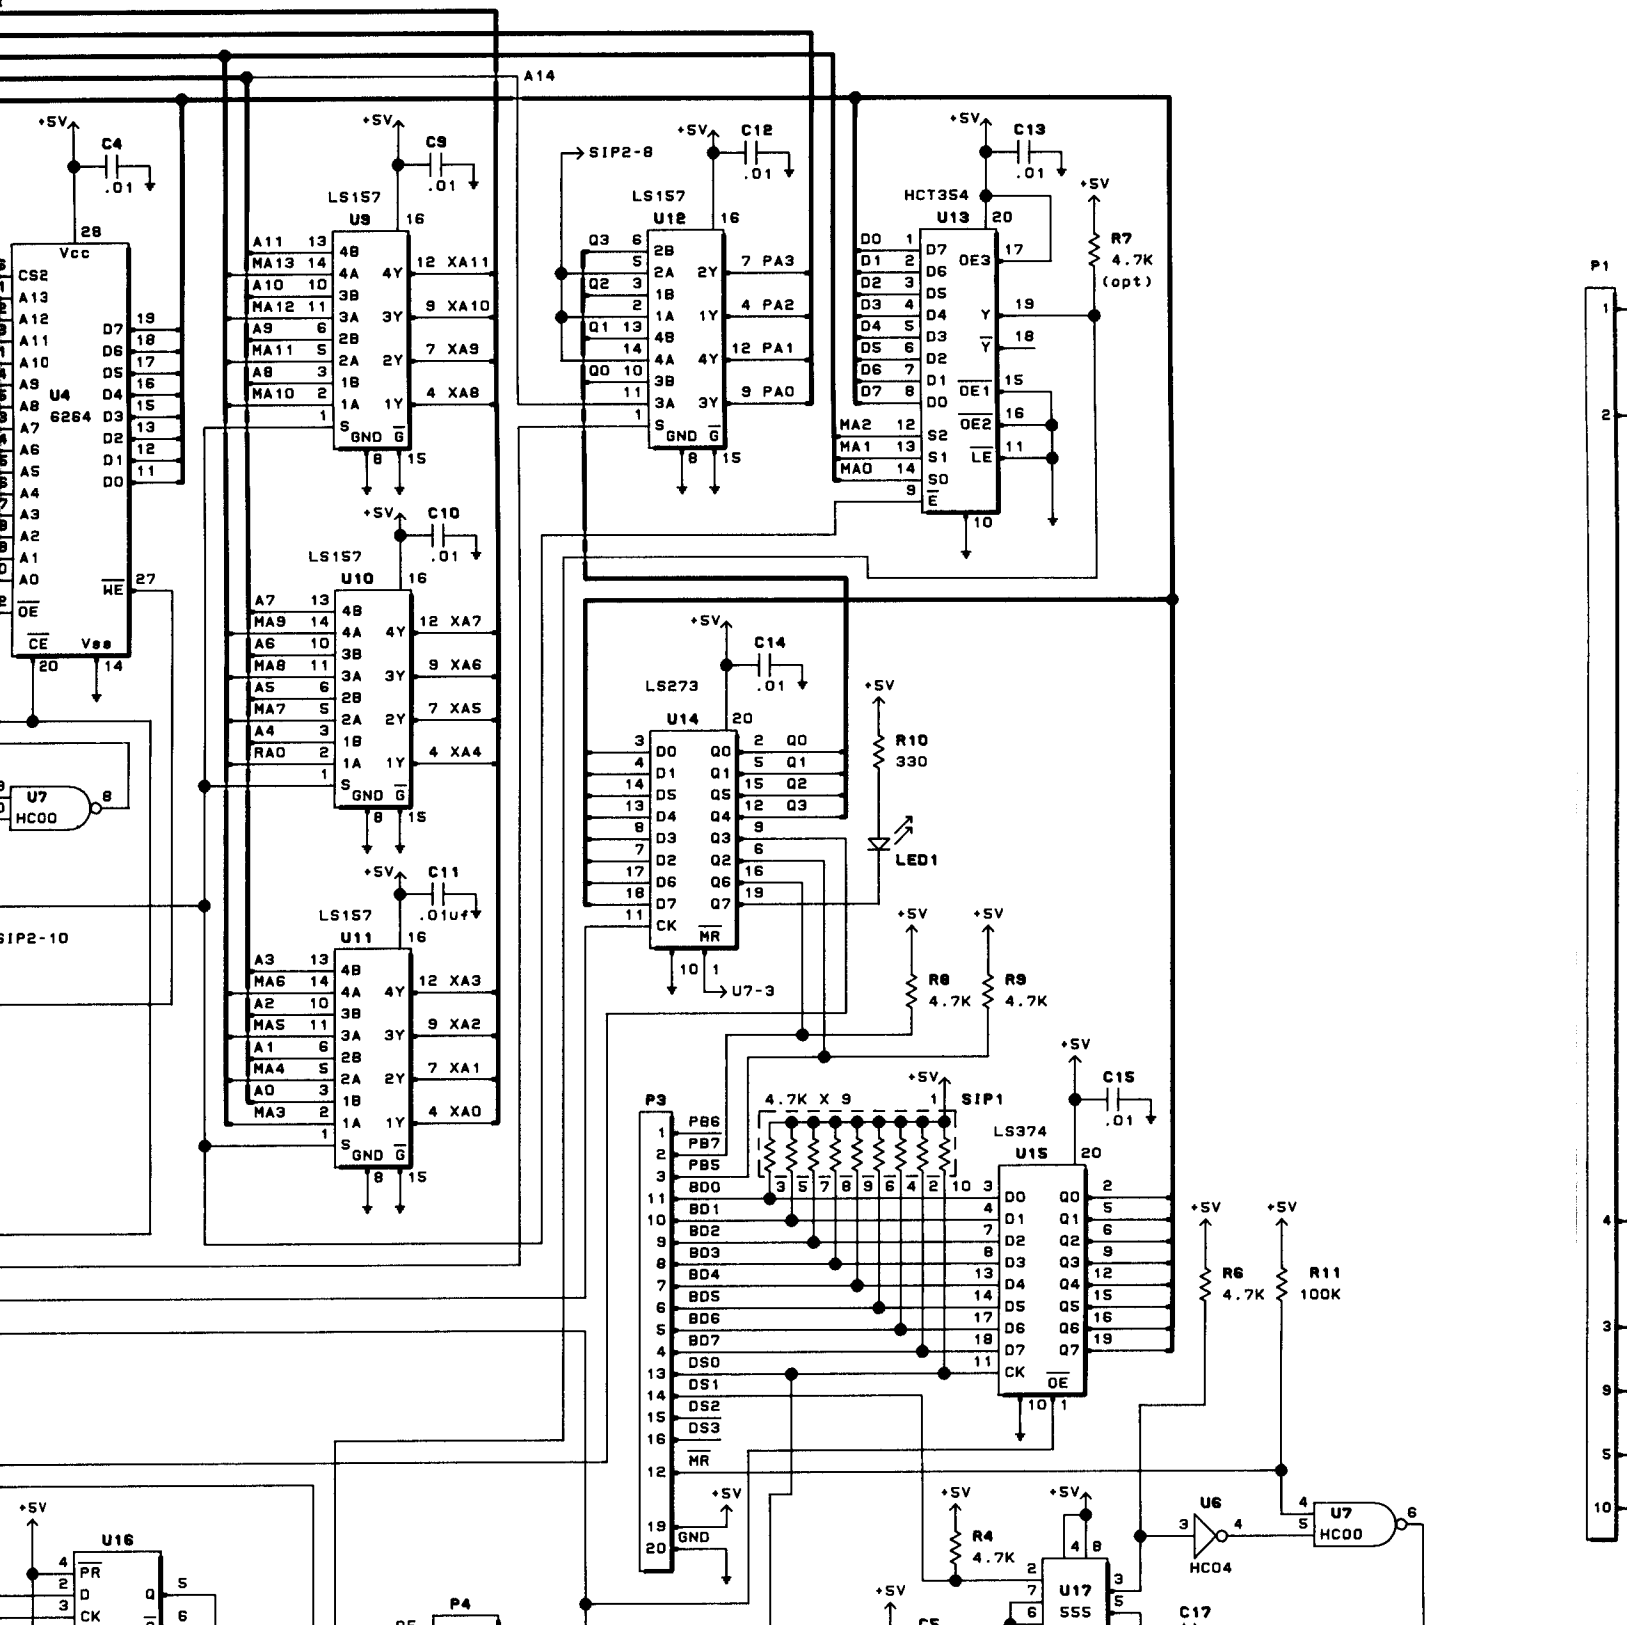


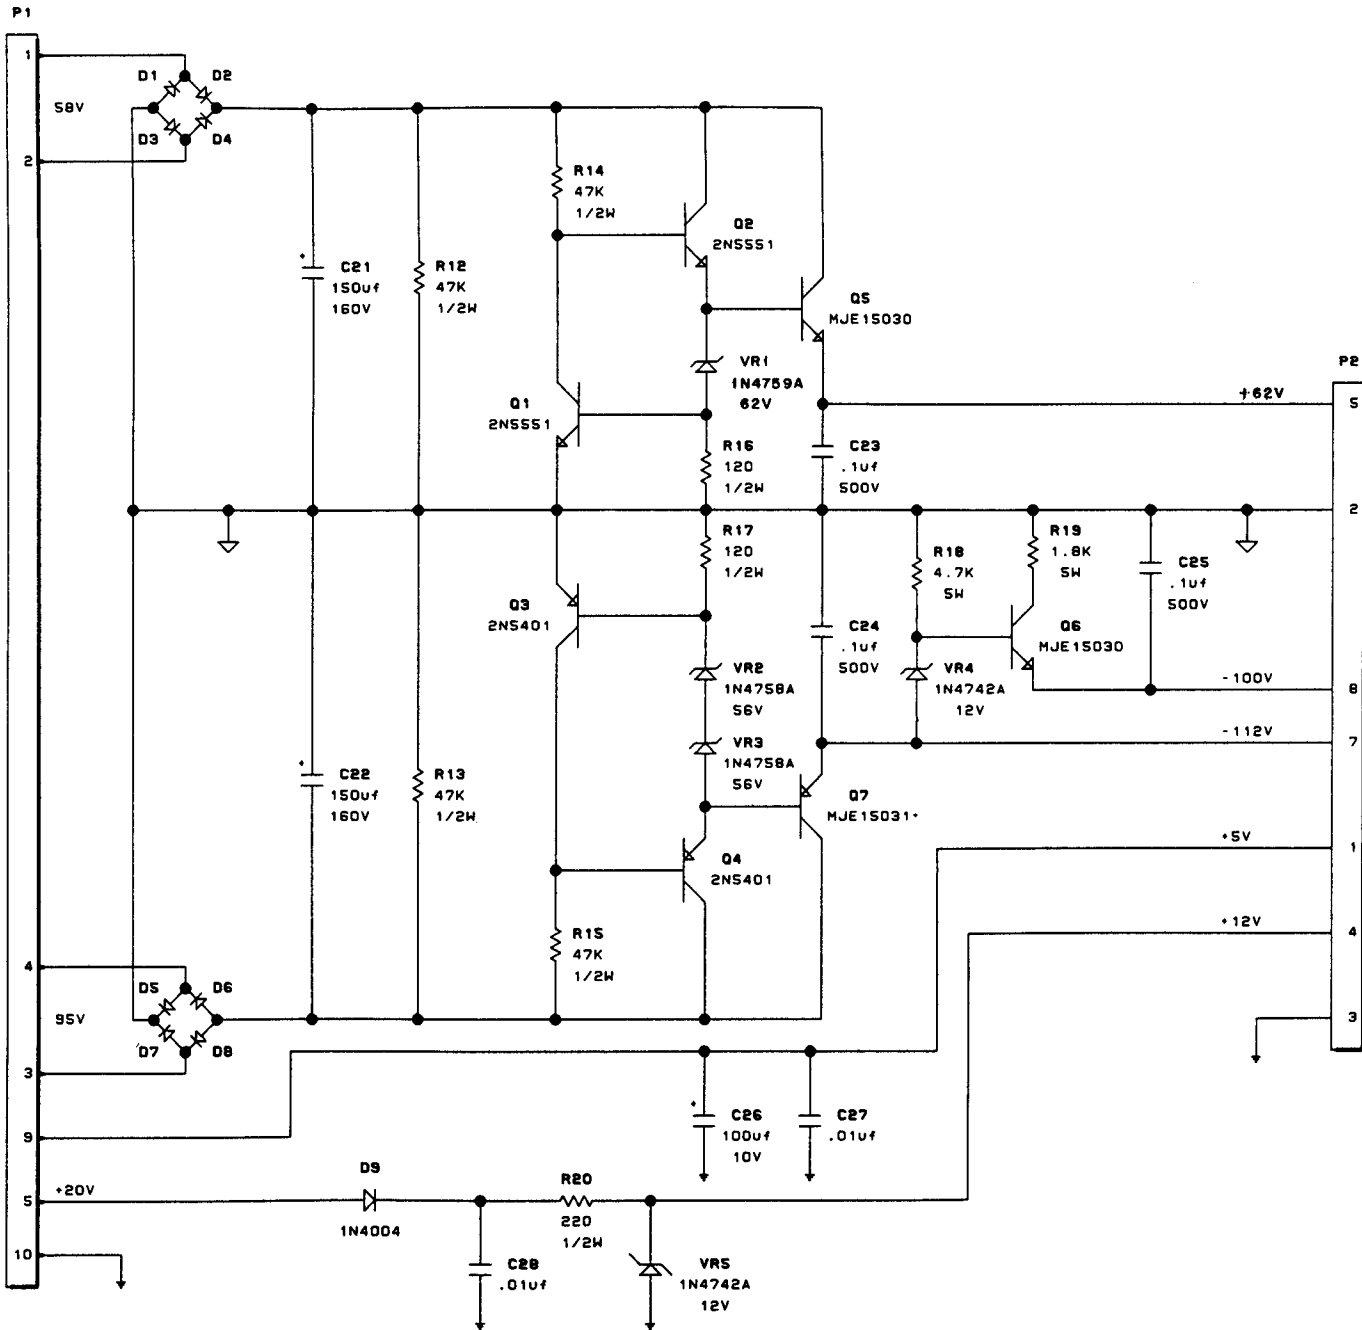

Premier Technology			
TITLE			
DISPLAY CONTROLLER (A8)			
SCHEMATIC DIAGRAM			
DRAWN	APPROVED	DATE	
C.B.	RHM	4-8-92	MA-1739


VI. WIRING AND SCHEMATIC DIAGRAMS, PARTS

DISPLAY CONTROLLER (A8) COMPONENT LOCATION

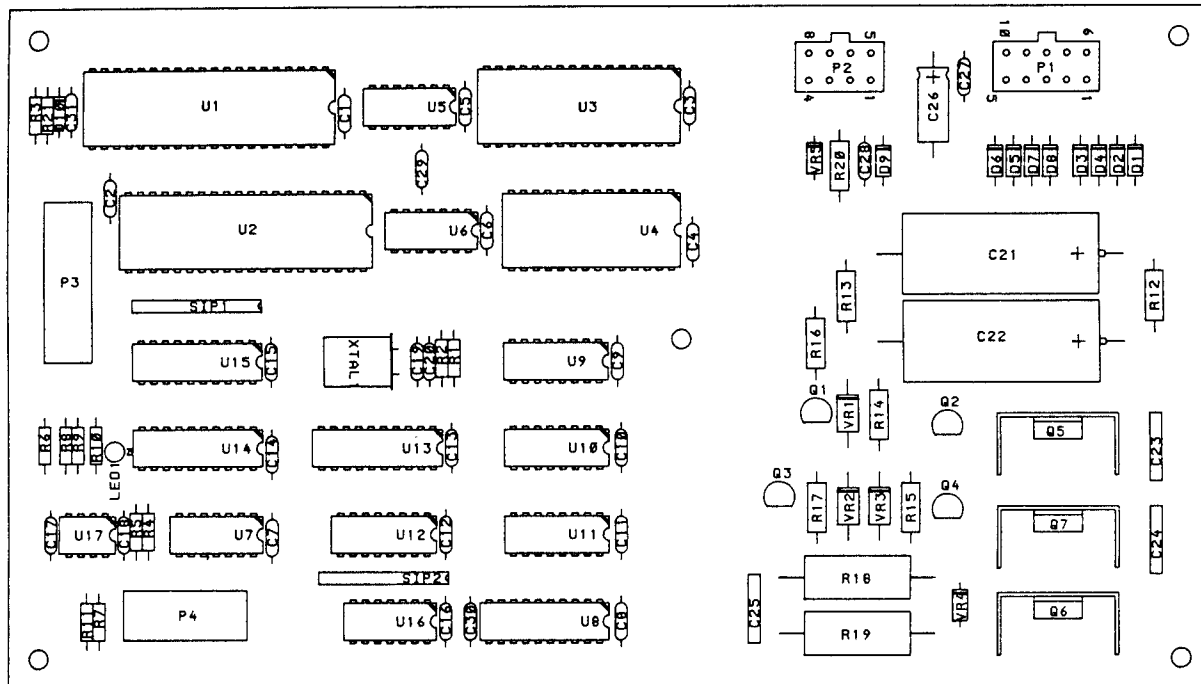


REFERENCE	DESCRIPTION
A8	DISPLAY CONTROLLER
C1-C3	CAPACITOR
C4-C18	CAPACITOR
C27, C28	CAPACITOR
C19, C20	CAPACITOR
C21, C22	CAPACITOR
C23, C25	CAPACITOR
C26	CAPACITOR
C29, C30	CAPACITOR
C31	CAPACITOR
D1-D9	DIODE, 1N4148
D10	DIODE, 1N4001
LED 1	DIODE, LED
Q1, Q2	TRANSISTOR
Q3, Q4	TRANSISTOR
Q5, Q6	TRANSISTOR
Q7	TRANSISTOR
R1	RESISTOR
R2	RESISTOR
R3-R6, R8, R9	RESISTOR
R10	RESISTOR
R11	RESISTOR
R12-R15	RESISTOR
R16-R17	RESISTOR
R18	RESISTOR
R19	RESISTOR
R20	RESISTOR
R21	RESISTOR
SIP1, SIP2	RESISTOR
U1	IC, 65C02
U2	IC, 68B45
U4	IC, 6264
U5, U16	IC, 74HCT00
U6	IC, 74HC00
U7	IC, 74HC00
U8	IC, GAL16V8
U9-U12	IC, 74LS15
U13	IC, 74HCT00
U14	IC, 74LS27
U15	IC, 74LS30
U17	IC, NE555
VR1	DIODE, ZENER
VR2, VR3	DIODE, ZENER
VR4, VR5	DIODE, ZENER
XTAL1	CRYSTAL
P1	HEADER, 10
P2	HEADER, 8
P3	HEADER, 20
P4	HEADER, 14
	HEATSINK
	SOCKET, 32
	SOCKET, 20

DOT MATRIX DISPLAY (A4)

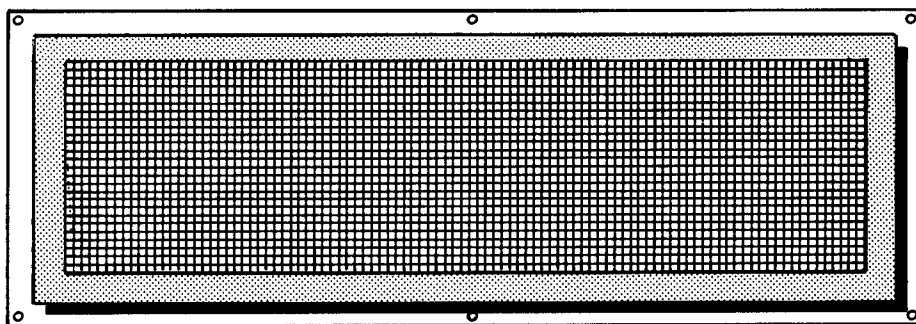


DESCRIPTION	PART NUMBER
DOT MATRIX DISPLAY	29151

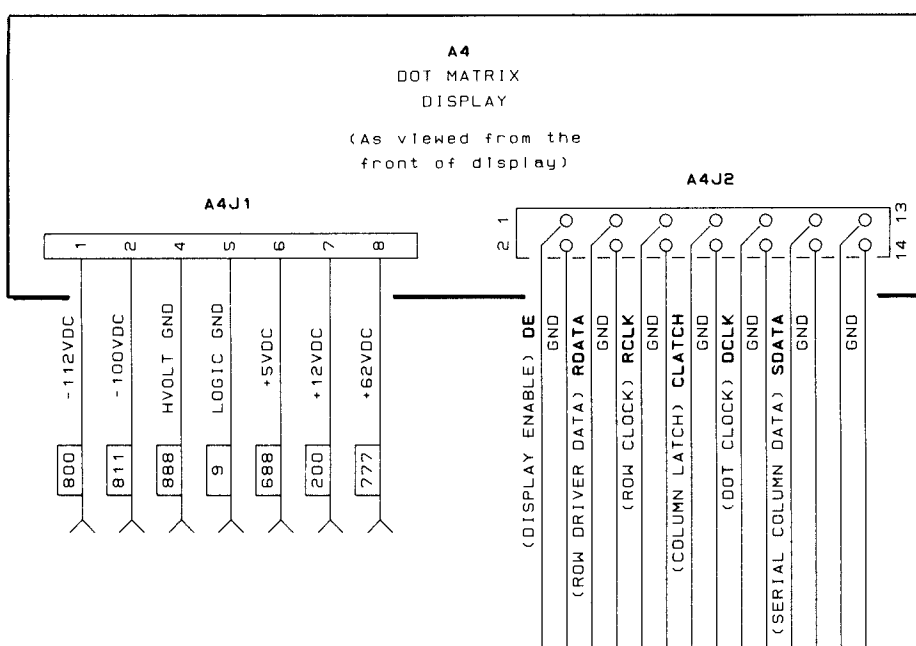


PARTS LIST


DESCRIPTION	PART NUMBER
DISPLAY CONTROLLER	MA-1739
CAPACITOR, 0.1UF, +80%-20%	XO-230
CAPACITOR, .01UF, +80%-20%	XO-229
CAPACITOR, 33PF, 10%, 100V	XO-896
CAPACITOR, 150UF, 160V	XO-1133
CAPACITOR, 0.1UF, 500V	XO-886
CAPACITOR, 100UF, 10V	XO-211
CAPACITOR, 220PF, 10%, 100V	XO-694
CAPACITOR, 0.1UF, 100V	XO-784
DIODE, 1N4004	XO-254
DIODE, 1N4148	XO-261
DIODE, LED, RED, MV5752	XO-270
TRANSISTOR, NPN, 2N5551	XO-1141
TRANSISTOR, PNP, 2N5401	XO-1142
TRANSISTOR, NPN, MJE15030	XO-1143
TRANSISTOR, PNP, MJE15031	XO-1144
POTENTIOMETER, 22 MEGOHM, 5%, 1/4W	XO-74
POTENTIOMETER, 10K OHM, 5%, 1/4W	XO-18
POTENTIOMETER, 4.7K OHM, 5%, 1/4W	XO-7
POTENTIOMETER, 330 OHM, 5%, 1/4W	XO-34
POTENTIOMETER, 100K OHM, 5%, 1/4W	XO-45
POTENTIOMETER, 47K OHM, 5%, 1/4W	XO-1135
POTENTIOMETER, 120 OHM, 5%, 1/4W	XO-1136
POTENTIOMETER, 4.7K OHM, 5%, 5W	XO-1137
POTENTIOMETER, 1.8K OHM, 5%, 1/4W	XO-1138
POTENTIOMETER, 220 OHM, 5%, 1/4W	XO-185
POTENTIOMETER, 2.2K OHM, 5%, 1/4W	XO-27
POTENTIOMETER PACK, 4.7 OHM	XO-906
5C02P2, CPU, 2MHZ	XO-927
8B45, CONTROLLER	XO-1139
264LP, RAM STAT 8K X 8	XO-781
4HCT74, DUAL "D" FLIP-FLOP	XO-889
4HC04, INVERTER	XO-888
4HC00, QUAD "NAND" GATES	XO-782
AL16V8-25L	U8-G
4LS157, QUAD 1 OF 2 MULTIPLEXER	XO-390
4HCT354, 1 OF 8 MULTIPLEXER	XO-1140
4LS273, OCTAL DATA LATCH	XO-94
4LS374, OCTAL "D" FLIP-FLOP	XO-96
555, TIMER	XO-631
ZENER, 1N4759A, 62V, 5%	XO-267
ZENER, 1N4758A, 56V, 5%	XO-1164
ZENER, 1N4742A, 12V, 5%	XO-257
CRYSTAL, 3.579MHZ	XO-1166
SWITCH, 10 POSITION	XO-912
SWITCH, 8 POSITION	XO-911
SWITCH, 20 POSITION, RIBBON	XO-940
SWITCH, 14 POSITION, RIBBON	XO-1134
RELAY, 6038	XO-472
RELAY, 32 PIN	XO-1036
RELAY, 20 PIN	XO-491

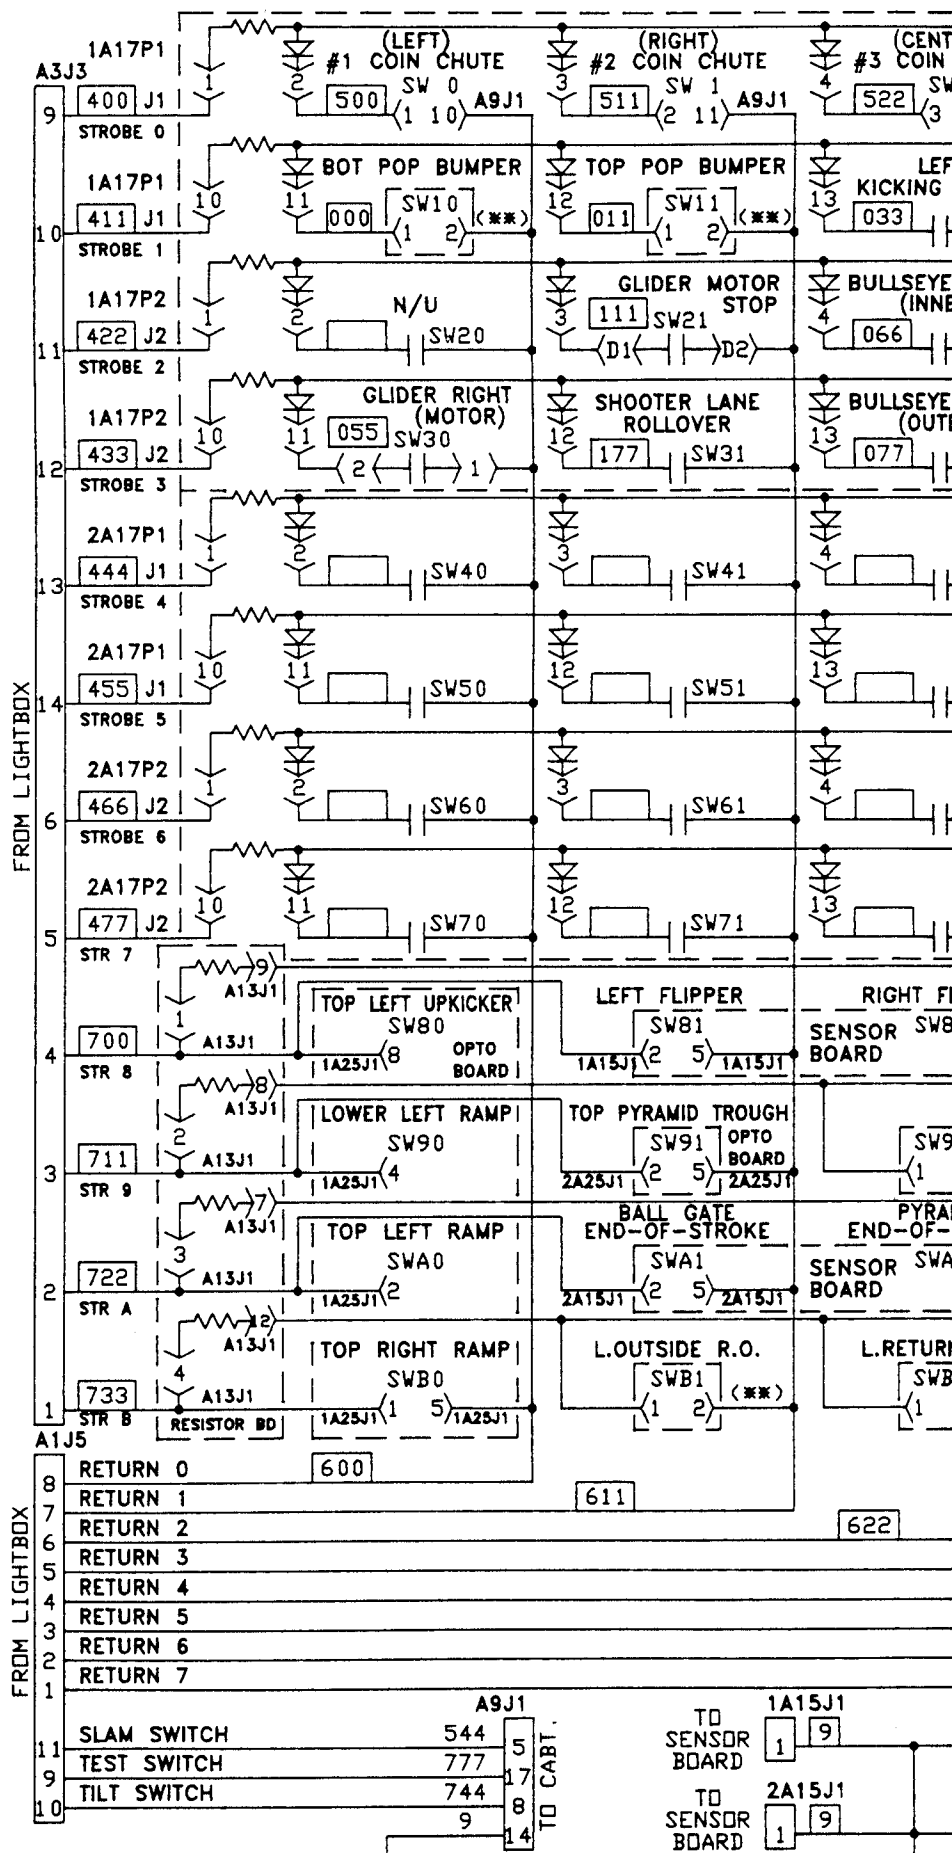

ING AND SCHEMATIC DIAGRAMS, PARTS LISTS

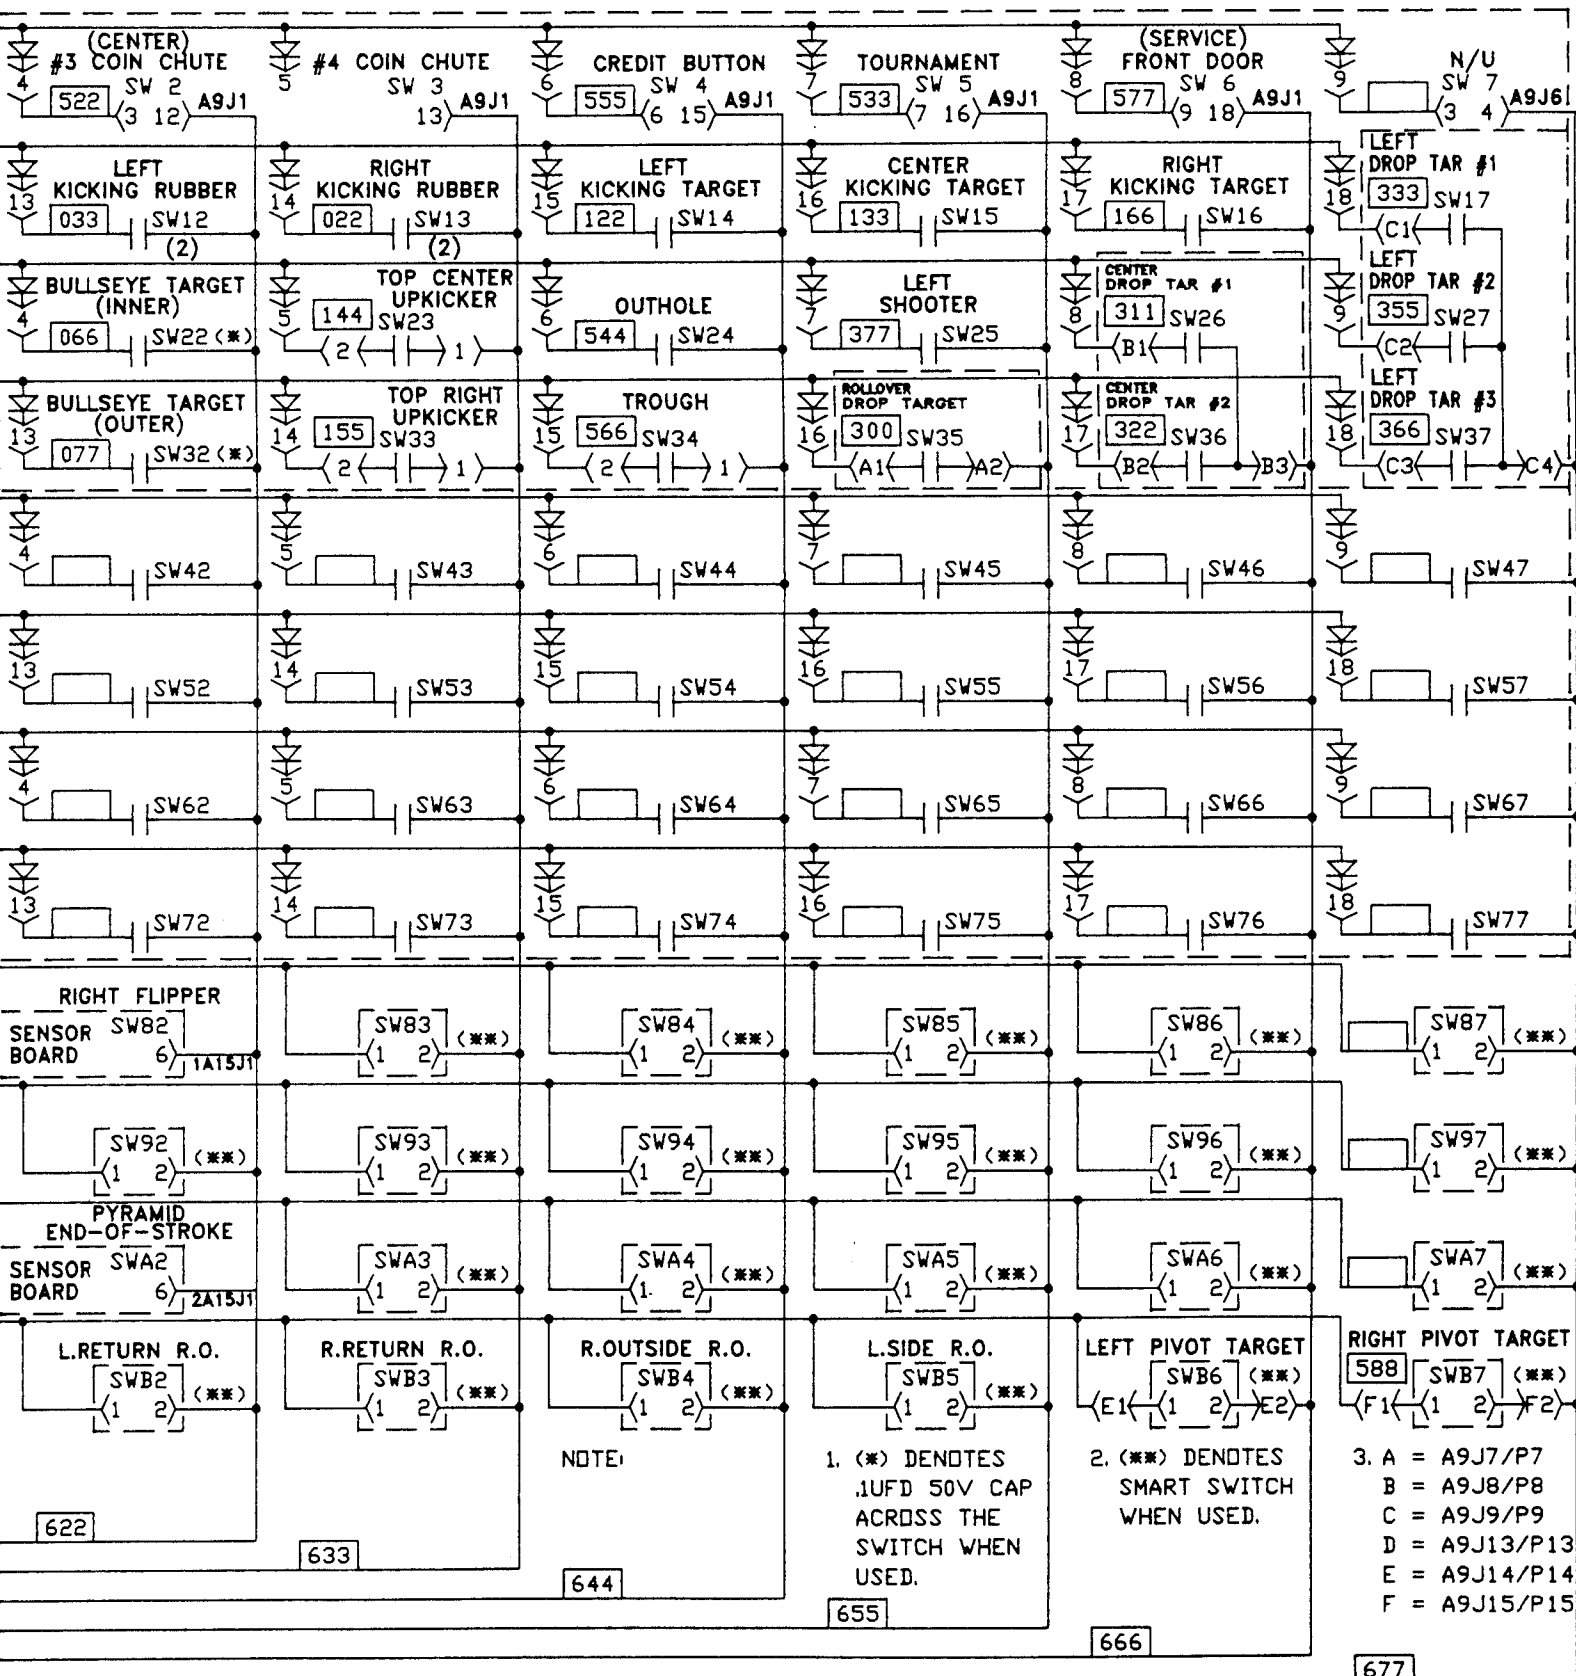


VI. WIRING AND SCHEMATIC DIAGRAMS, PARTS LISTS

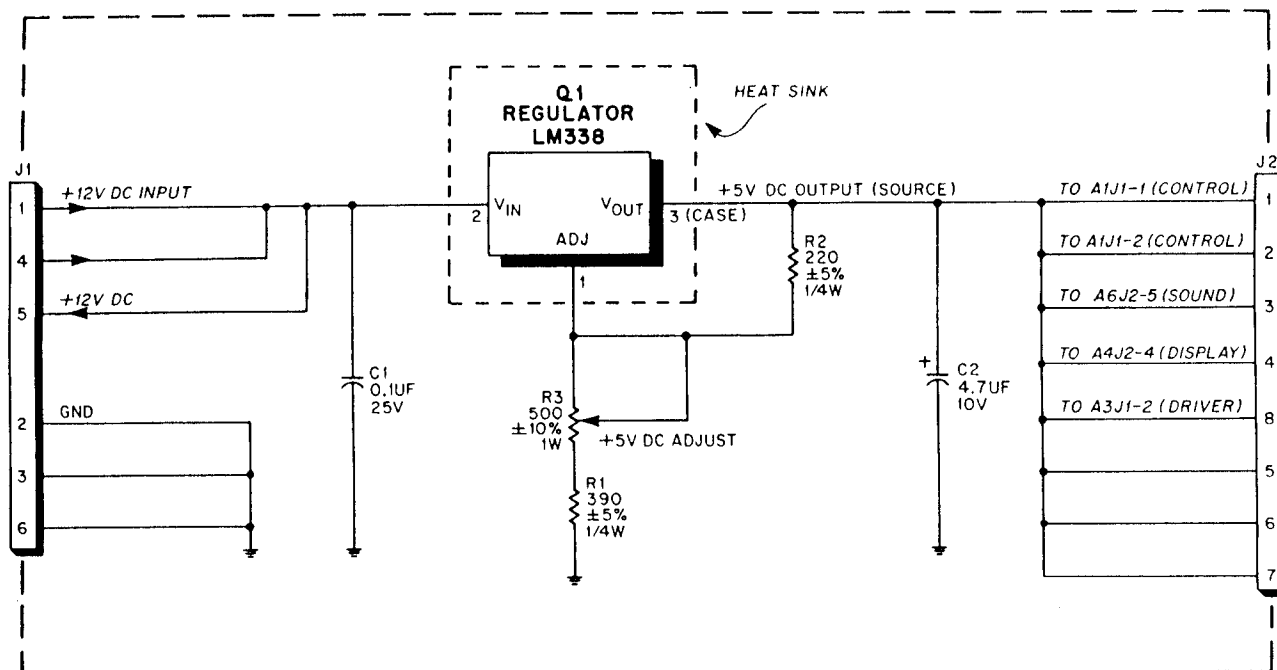


Premier Technology			
TITLE			
POWER SUPPLY (A2)			
SCHEMATIC DIAGRAM			
DRAWN	APPROVED	DATE	E-24441
R.P.S.	R.H.M.	12 FEB 85	

POWER SUPPLY (A2) COMPONENT LOCATION

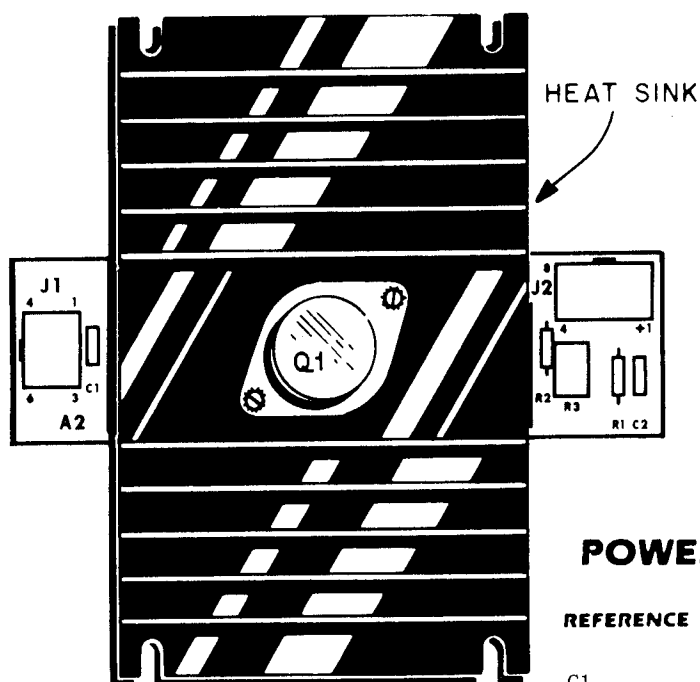

POWER SUPPLY (A2) PARTS LIST

REFERENCE	DESCRIPTION	PART NUMBER
	Power Supply (A2)	MA-1359
C1	Capacitor, 0.1uF, +80% -20%, 50V	XO-230
C2	Capacitor, 4.7uF, 10% 10V	XO-226
J1	Header, 6 Position	XO-910
J2	Header, 8 Position	XO-911
Q1	Regulator, LM338, (5 Amp)	XO-839
R1	Resistor, 390 Ohm, 5%, 1/4W	XO-845
R2	Resistor, 220 Ohm, 5%, 1/4W	XO-21
R3	Resistor, (Pot) 500 Ohm, 10%, 1W	XO-112
	Heat Sink	XO-534
	Insulator (Regulator)	XO-522
	Insulator (Regulator)	XO-523

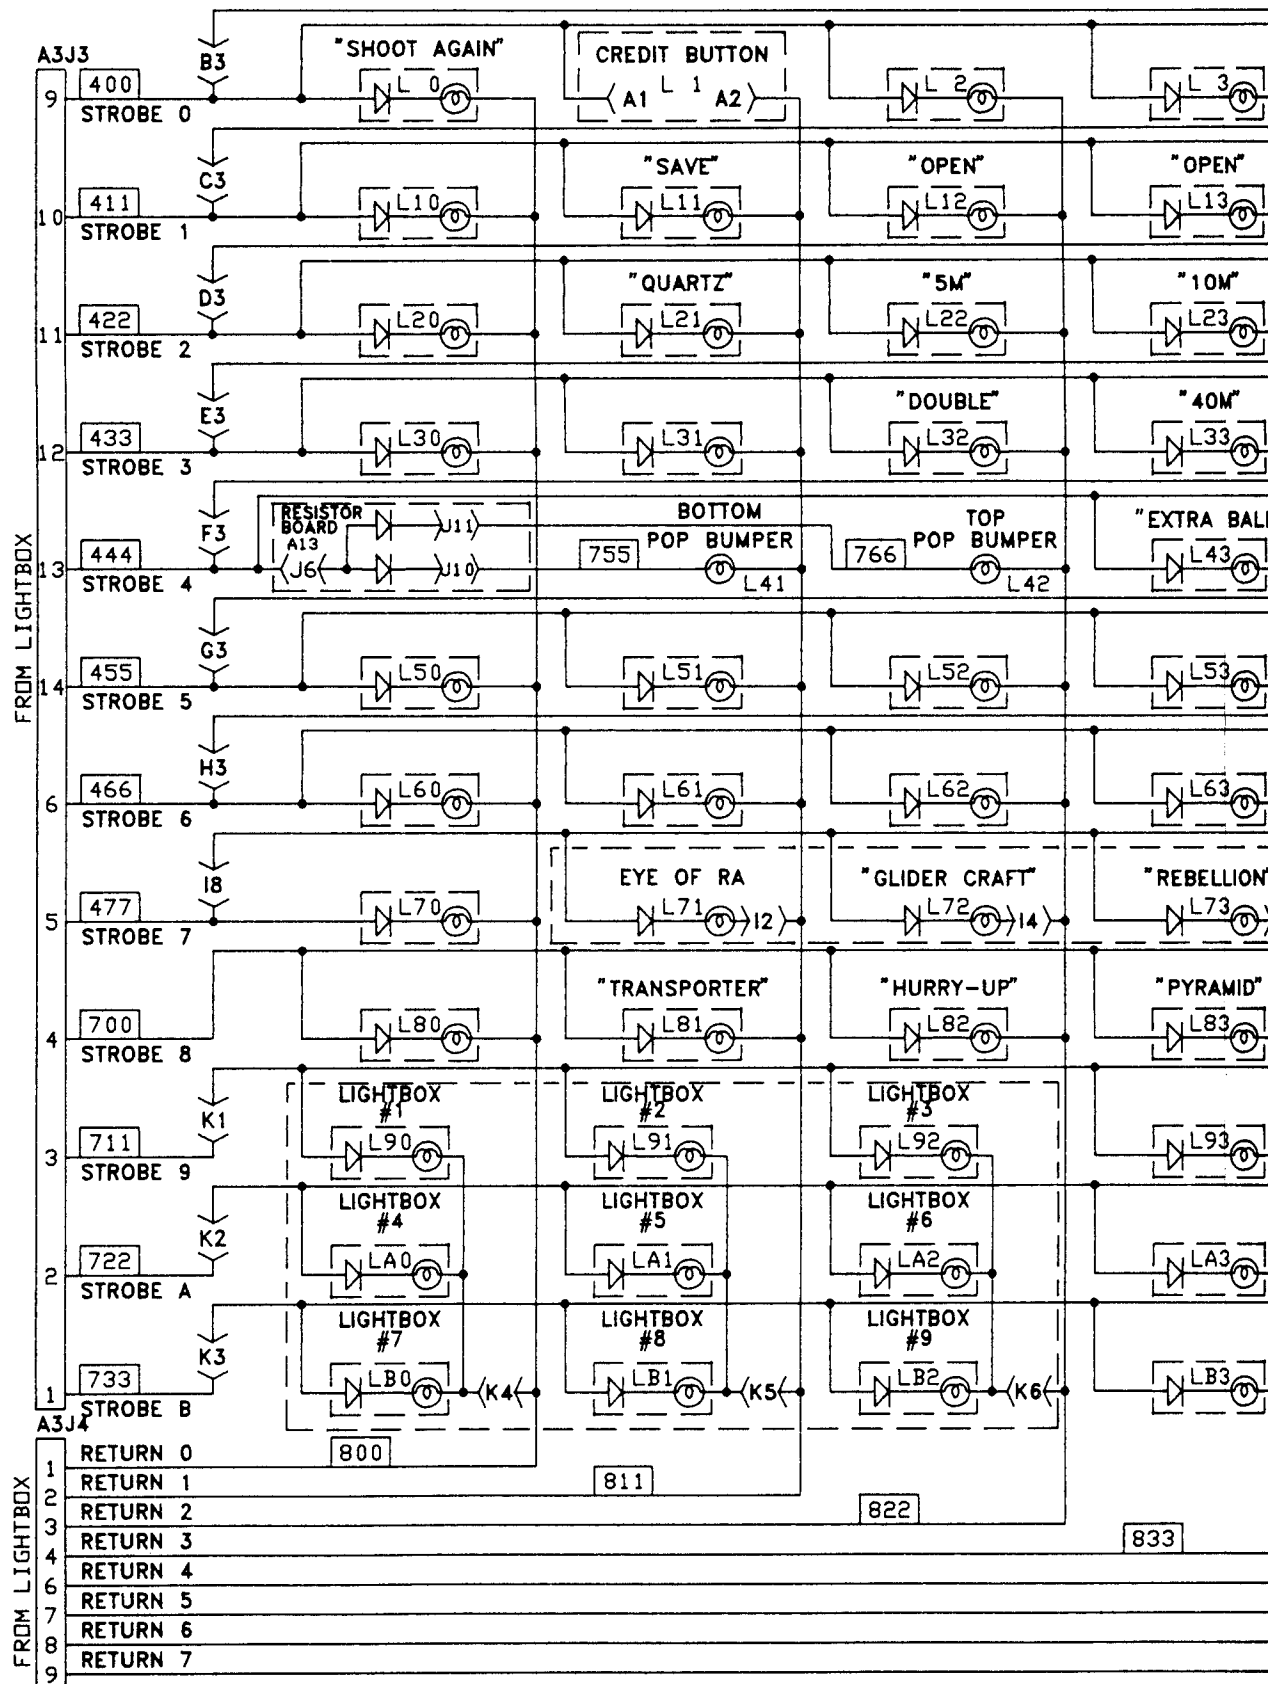


NOTE: 1. ALL LAMP
DIODES ARE
TYPE 1N4004.


2. ALL LAMPS
ARE TYPE #44.

2. A = A9J6
J = 1A13J1
K = A9J4/P4

B = 1A22J1
C = 2A22J1
D = 3A22J1
E = 4A22J1

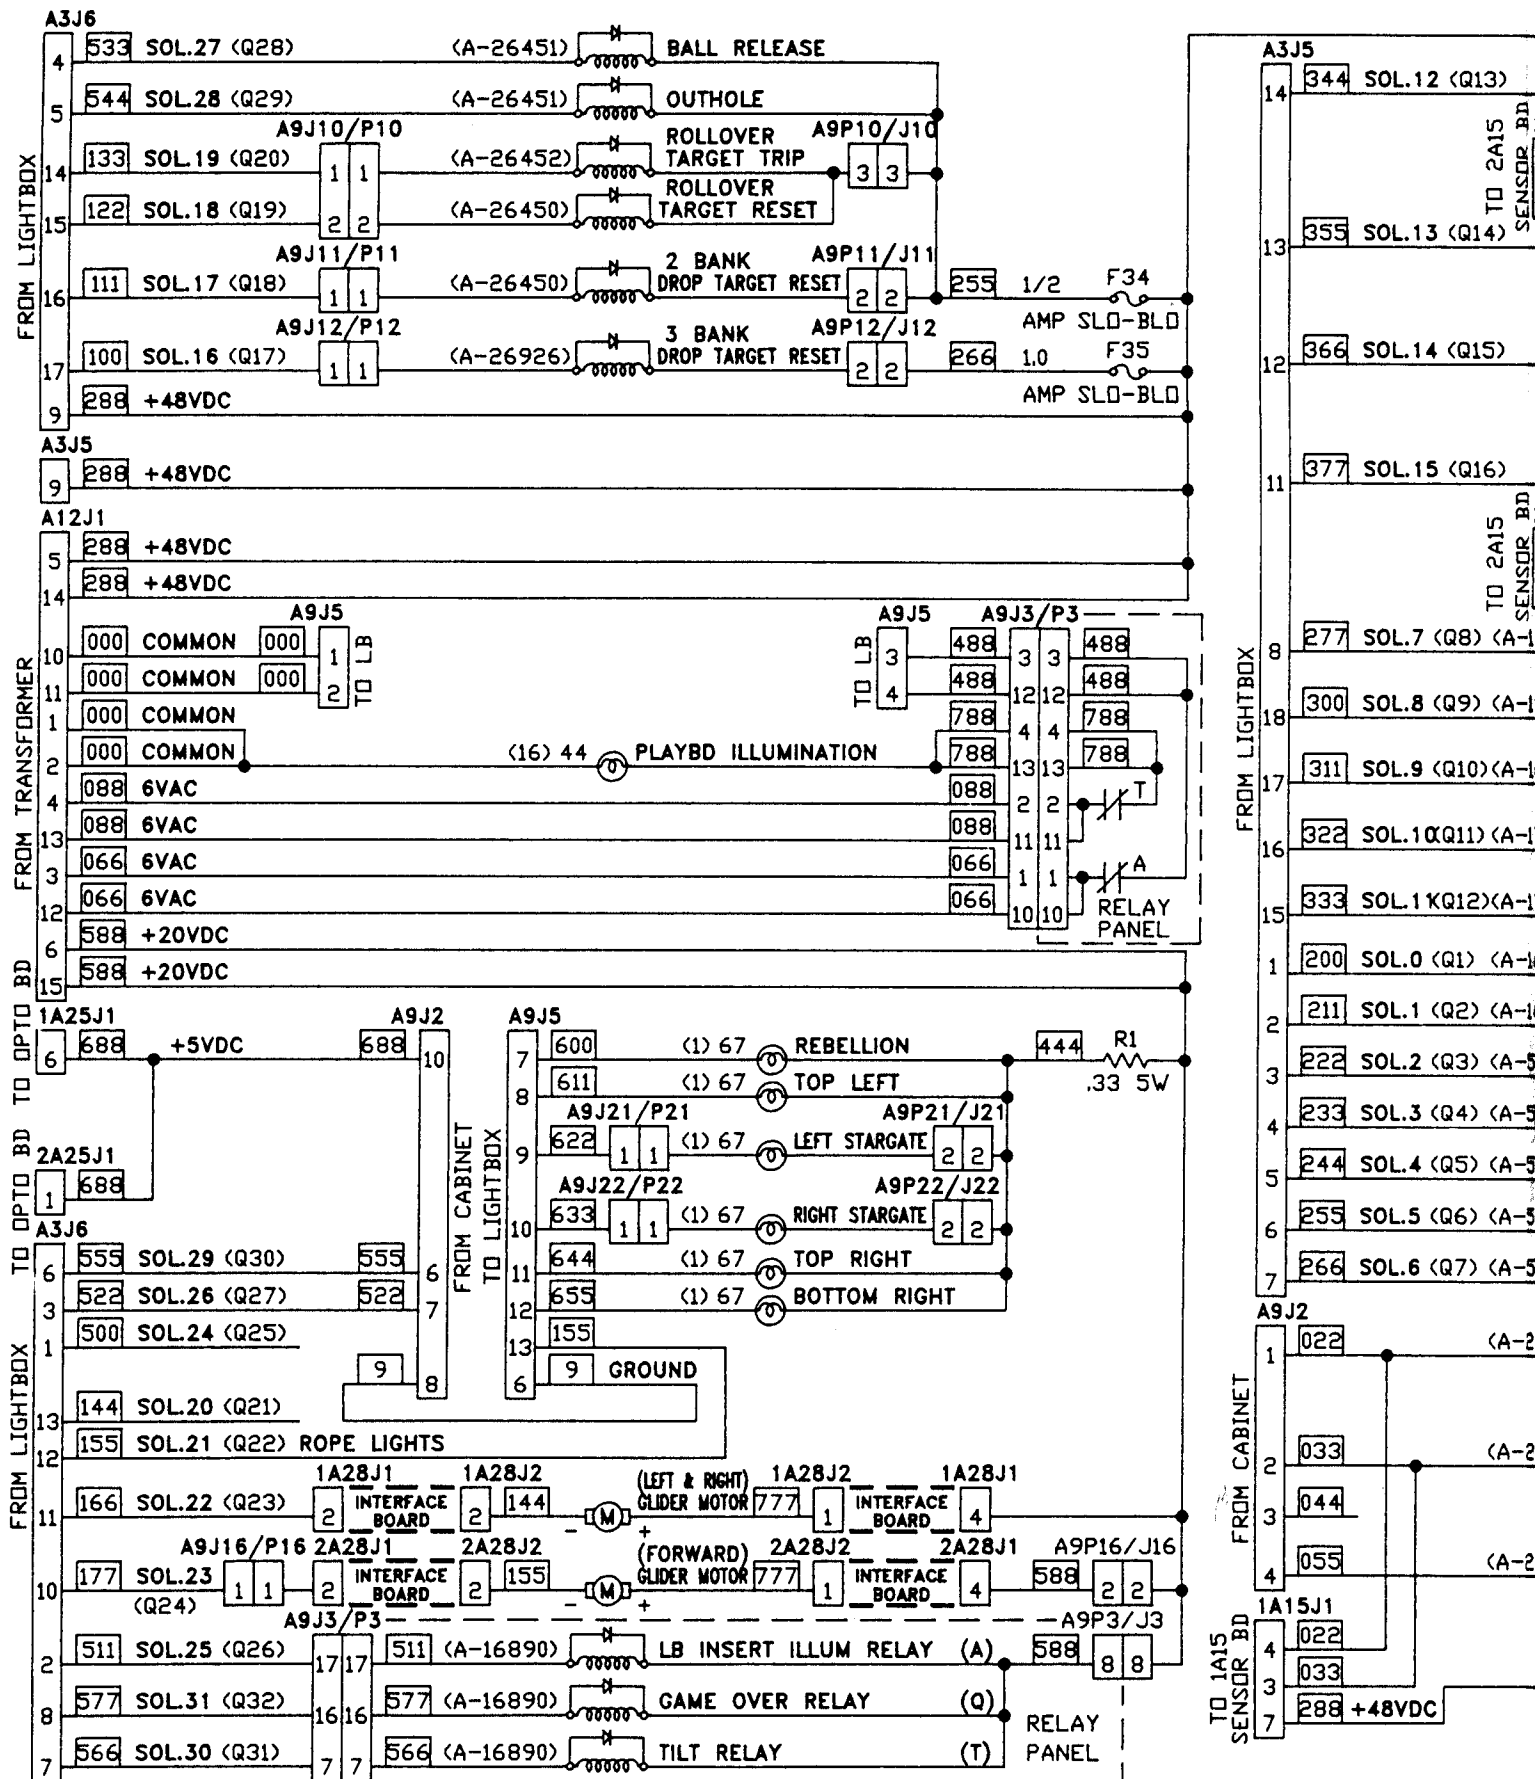


NOTE:
1. ALL DIODES ARE TYP

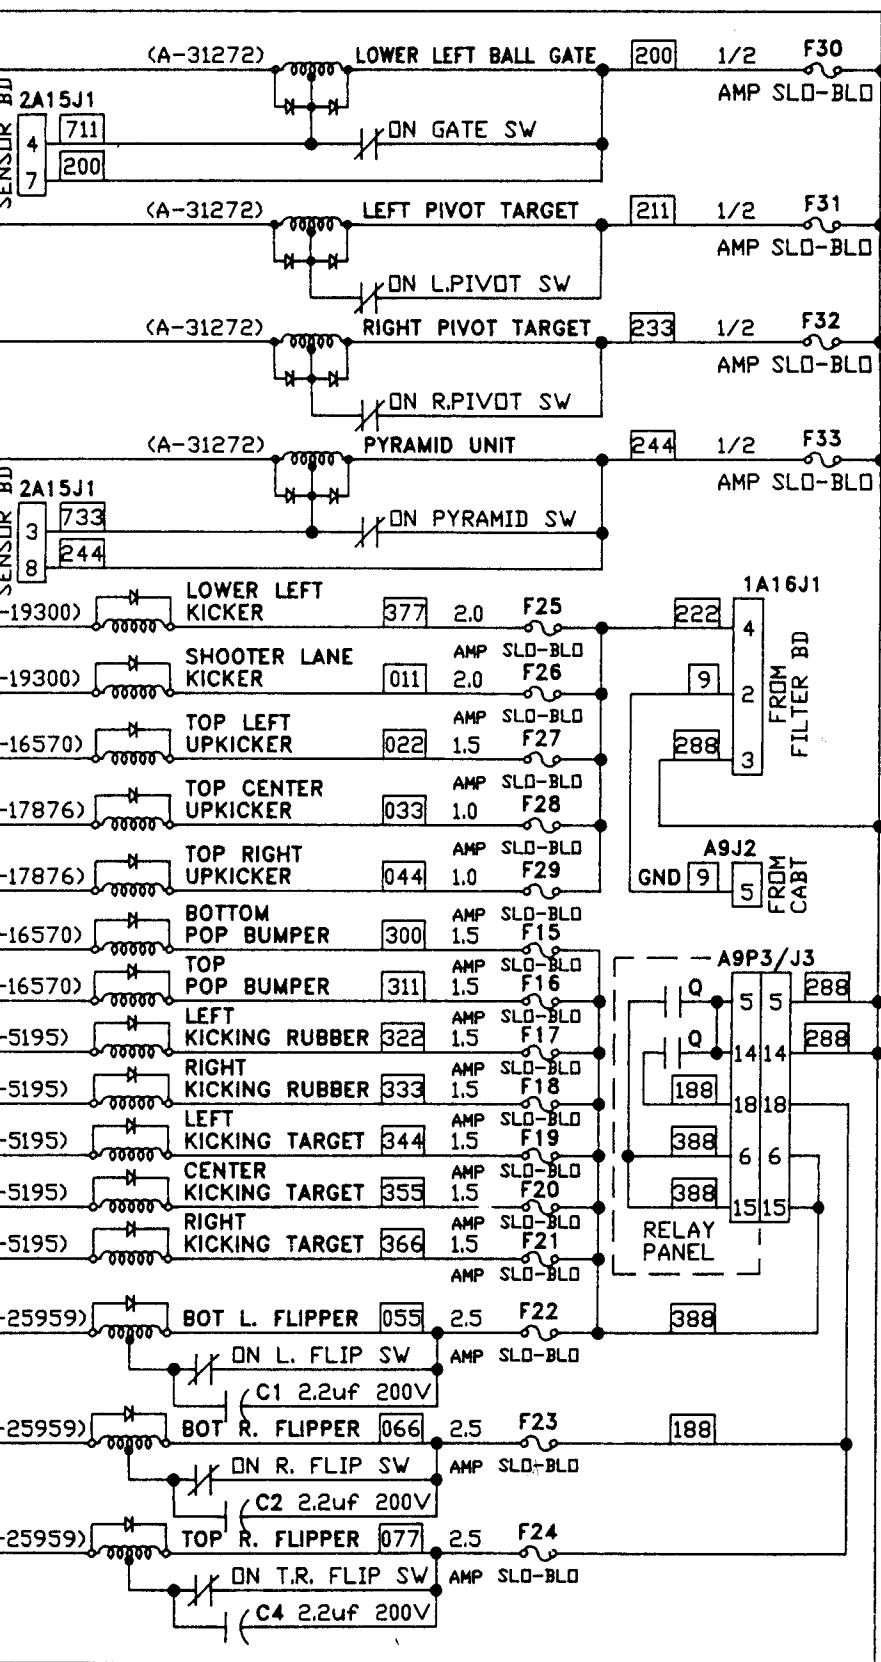


COLOR CODE			
0	BLACK	5	GREEN
1	BROWN	6	BLUE
2	RED	7	VIOLET
3	ORANGE	8	GRAY
4	YELLOW	9	WHITE

Premier Technology			
TITLE			
PLAYBOARD			
SCHEMATIC DIAGRAM			
USED ON	DRAWN	DATE	
#742	RLM	01-24-95	30699

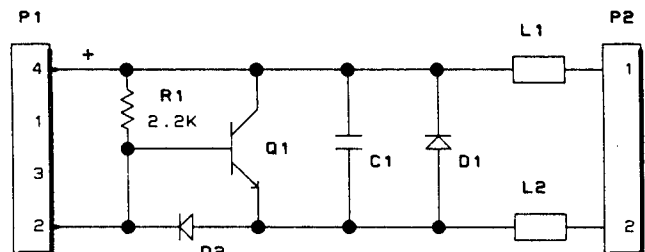

Premier Technology			
TITLE			
MOTOR INTERFACE BOARD (A28)			
SCHEMATIC DIAGRAM			
DRAWN	APPROVED	DATE	
J.B.	J.B.	JAN.9'94	MA-2026


MOTOR INTERFACE BOARD (A28) COMPONENT LOCATION

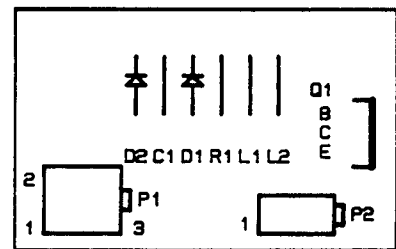

MOTOR INTERFACE BOARD (A28) PARTS LIST

REFERENCE	DESCRIPTION	PART NUMBER
	MOTOR INTERFACE BOARD	MA-2026
C1	CAPACITOR, .01UF, 50V	XO-229
D1, D2	DIODE, 1N4004	XO-254
L1, L2	FERRITE BEAD	XO-338
P1	HEADER, 4 POSITION	XO-909
P2	HEADER, 2 POSITION	XO-908
Q1	TRANSISTOR, NPN, TIP120	XO-1084
R1	RESISTOR, 2.2K OHM, 5%, 1/4W	XO-27
	SPACER, (3)	23984

VI. WIRING AND SCHEMATIC

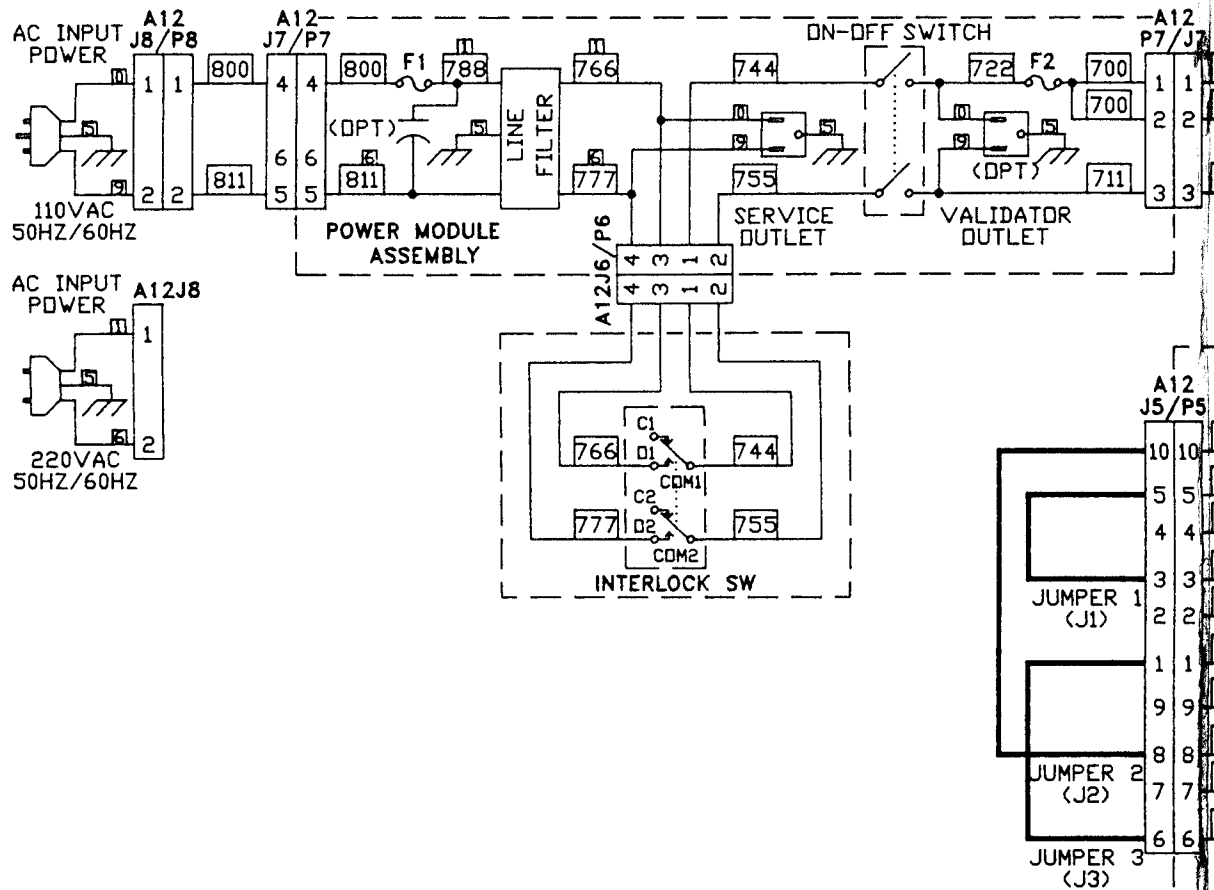


NOTES:


1. XXX INDICATES WIRE COLOR.
2. A12J5 SHOWN IN 110VAC OPERATION.
3. CIRCUIT GROUND EARTH GROUND

A12J5 WIRING VIEW PIN NUMBERS					
10	9	8	7	6	
5	4	3	2	1	
100VAC INPUT JUMPERS			200VAC INPUT JUMPERS		
J2	9	8	J2	J3	
J1	4	3	J1	J3	111
110VAC INPUT JUMPERS			220VAC INPUT JUMPERS		
J2	9	J2	7	J3	
J1	4	J1	2	J3	222
120VAC INPUT JUMPERS			240VAC INPUT JUMPERS		
J2	J2	8	7	J3	
J1	J1	3	2	J3	333
J2	J2	8	7	J3	
J1	J1	3	2	J3	666




FUSE DESIGNATIONS TABLE			
FUSE	RATING	PART NO.	USAGE
F1	8.0A SLO-BLO	EL26	LINE INPUT
	4.0A SLO-BLO	EL33	LINE INPUT
F2	5.0A SLO-BLO	EL 8	PRIMARY POWER
	2.5A SLO-BLO	EL21	PRIMARY POWER
F3	3/8A SLO-BLO	EL31	DISPLAY
F4	3/8A SLO-BLO	EL31	DISPLAY
F5	2.5A SLO-BLO	EL21	POWER SUPPLY
F6	10 A SLO-BLO	EL36	CONTROLLED LAMPS
F7	8.0A SLO-BLO	EL26	SOLENOIDS
F8	10 A	EL23	LIGHTBOX INSERT ILLUMINATION
F9	7.5A	EL22	PLAYBOARD ILLUMINATION
F10	3.0A SLO-BLO	EL 9	AUXILLIARY POWER SUPPLY
F11	3.0A SLO-BLO	EL 9	AUXILLIARY POWER SUPPLY
F12			

C DIAGRAMS, PARTS LISTS

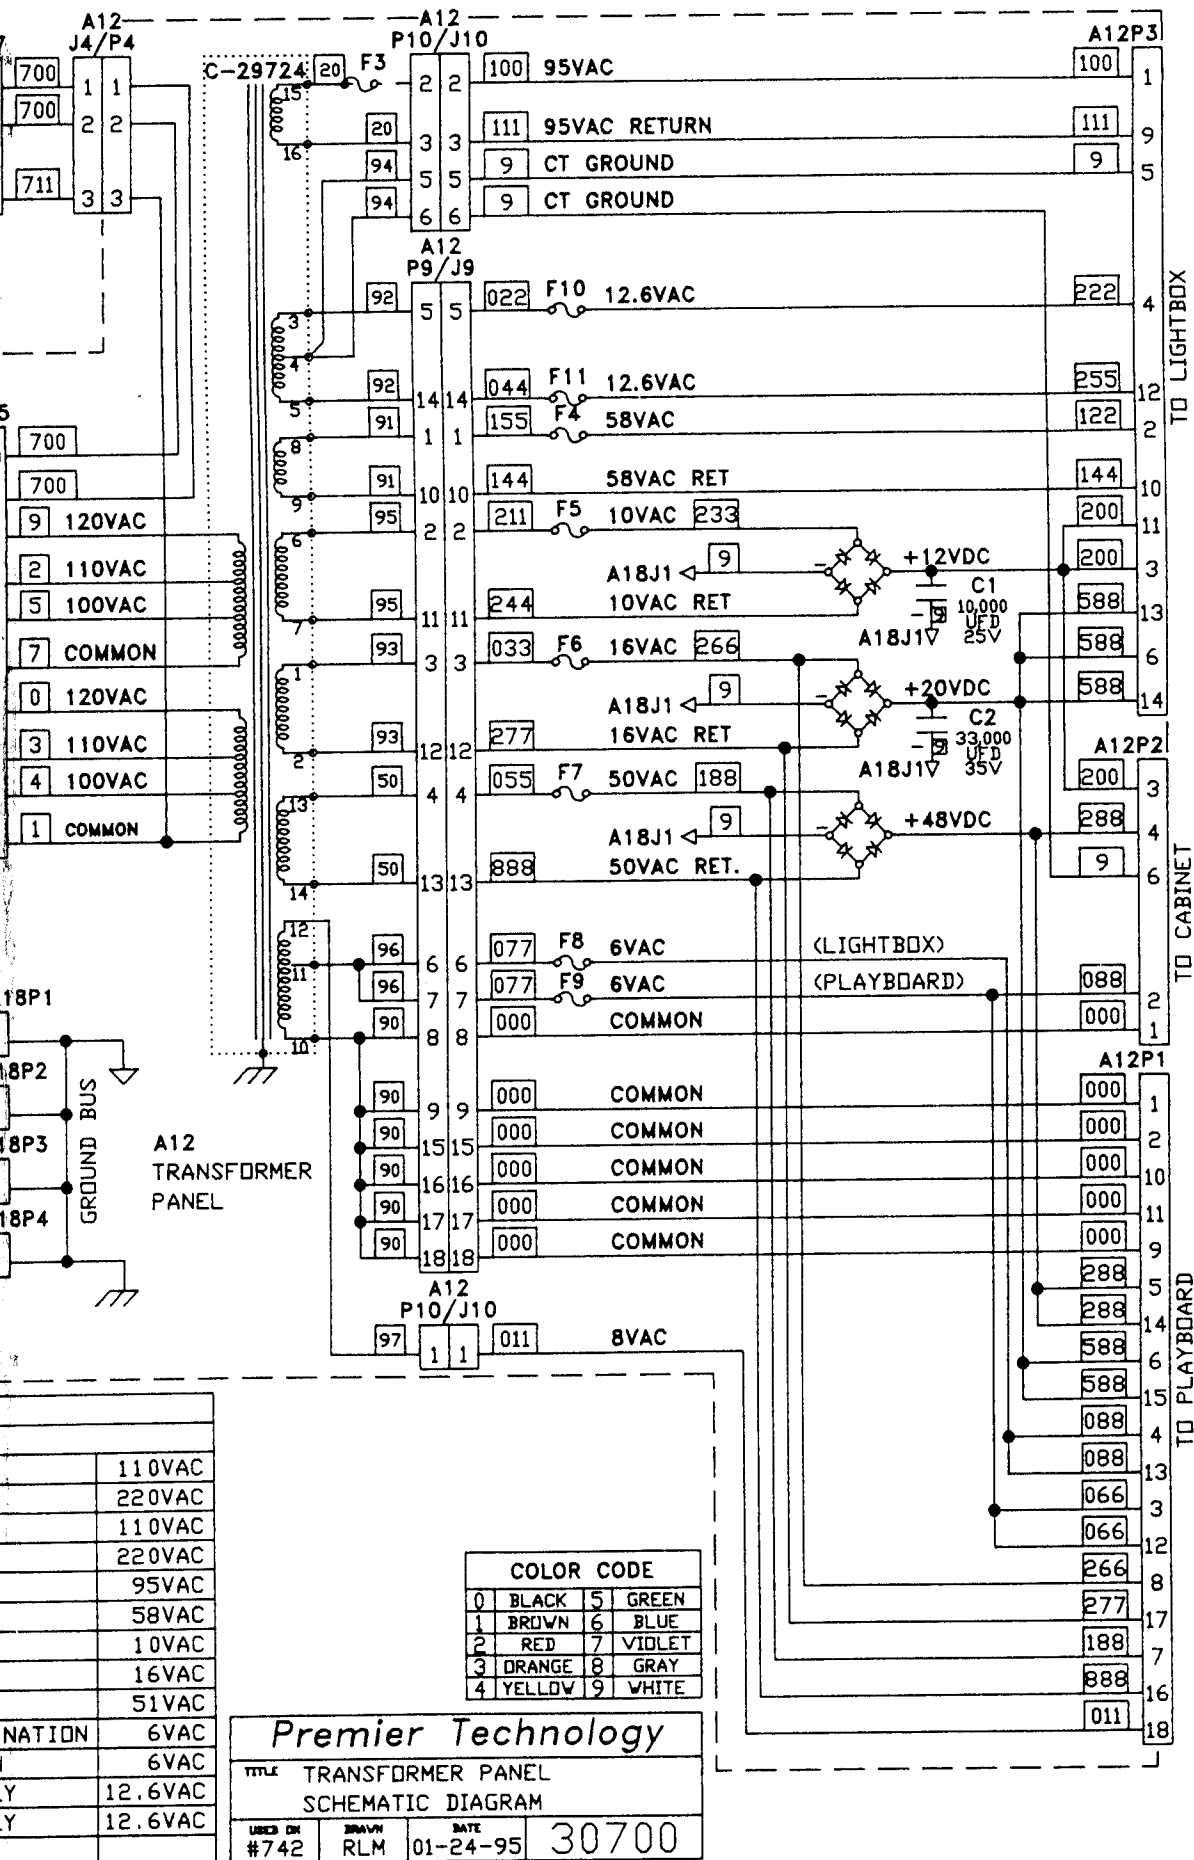

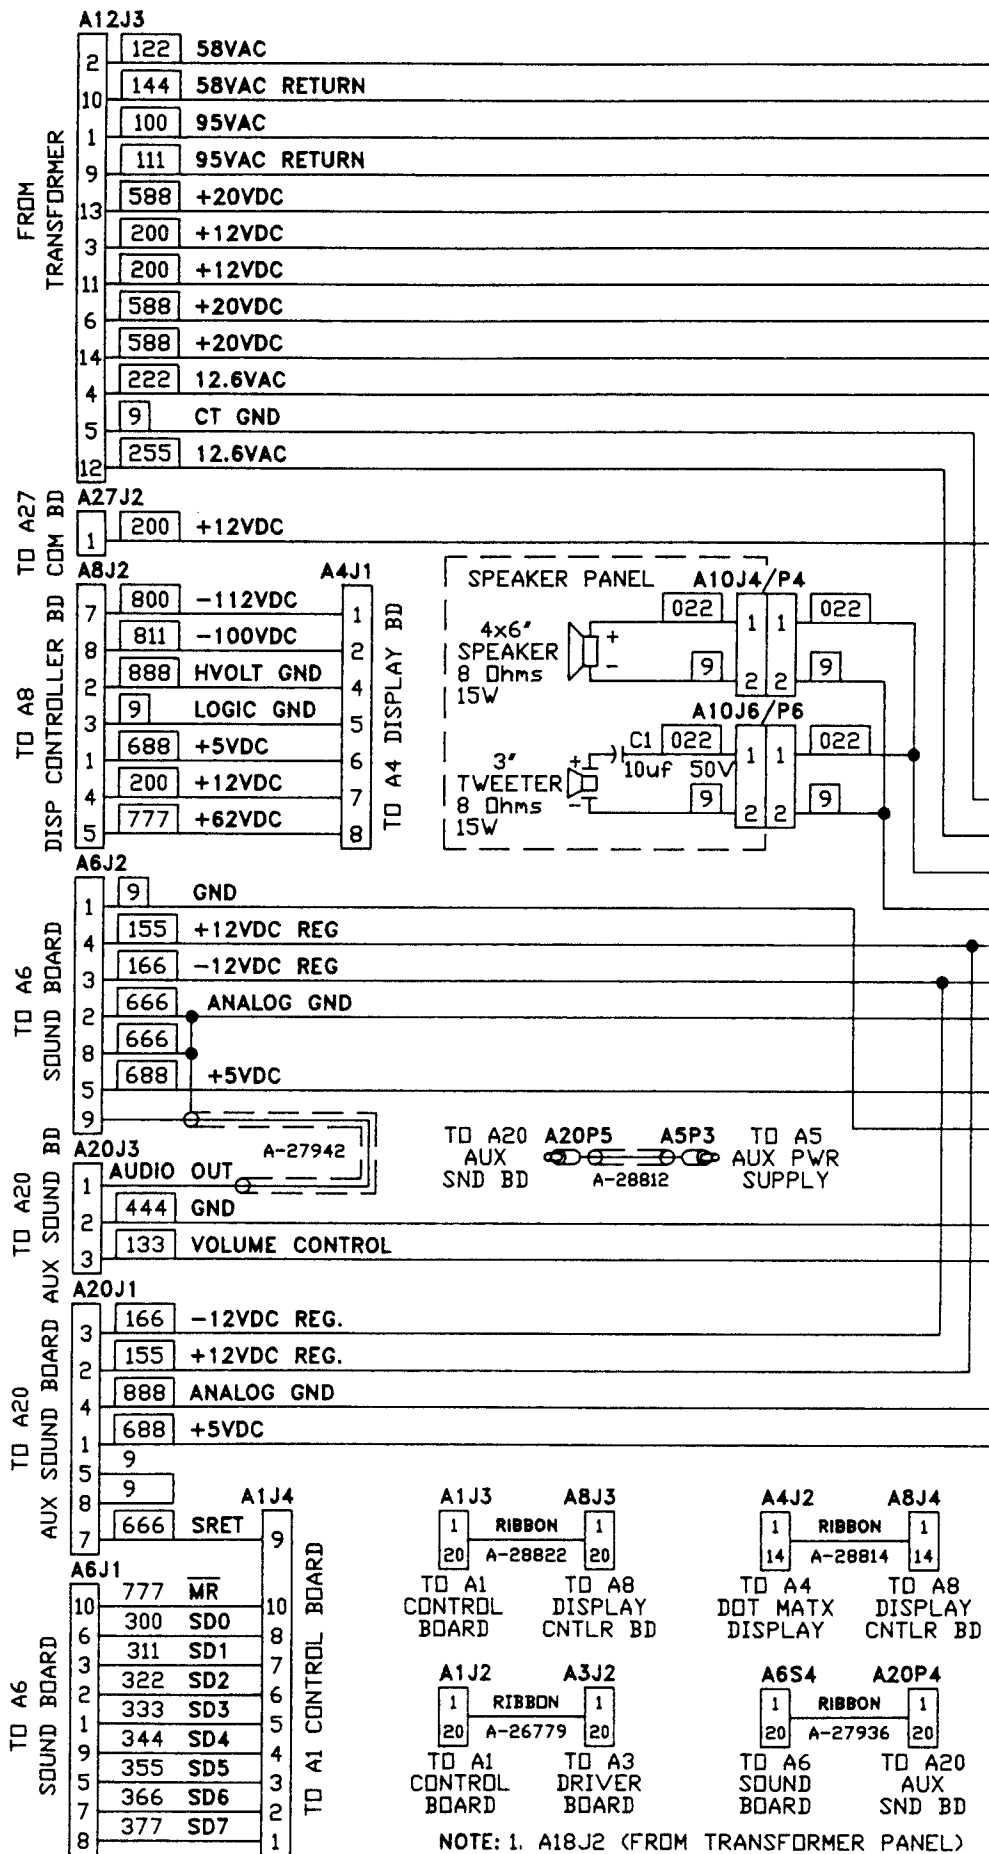


ATIC DIAGRAMS, PARTS LISTS

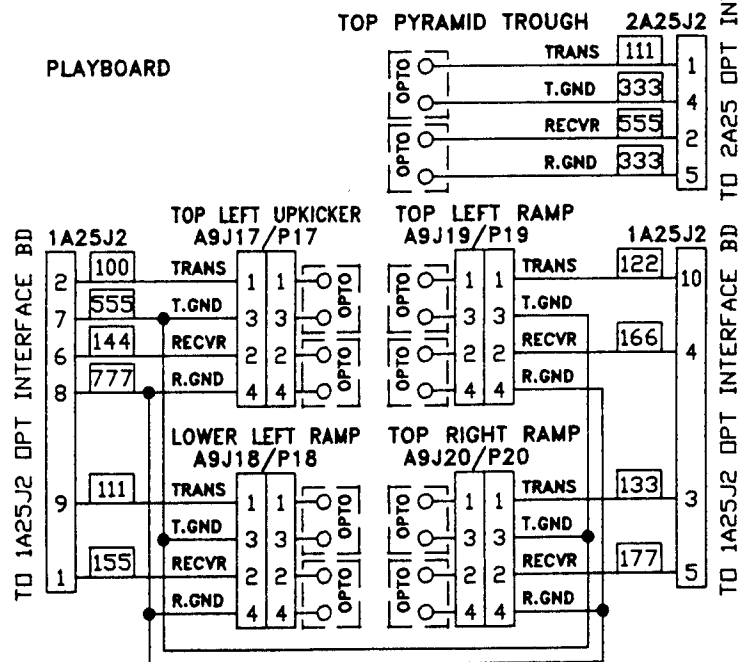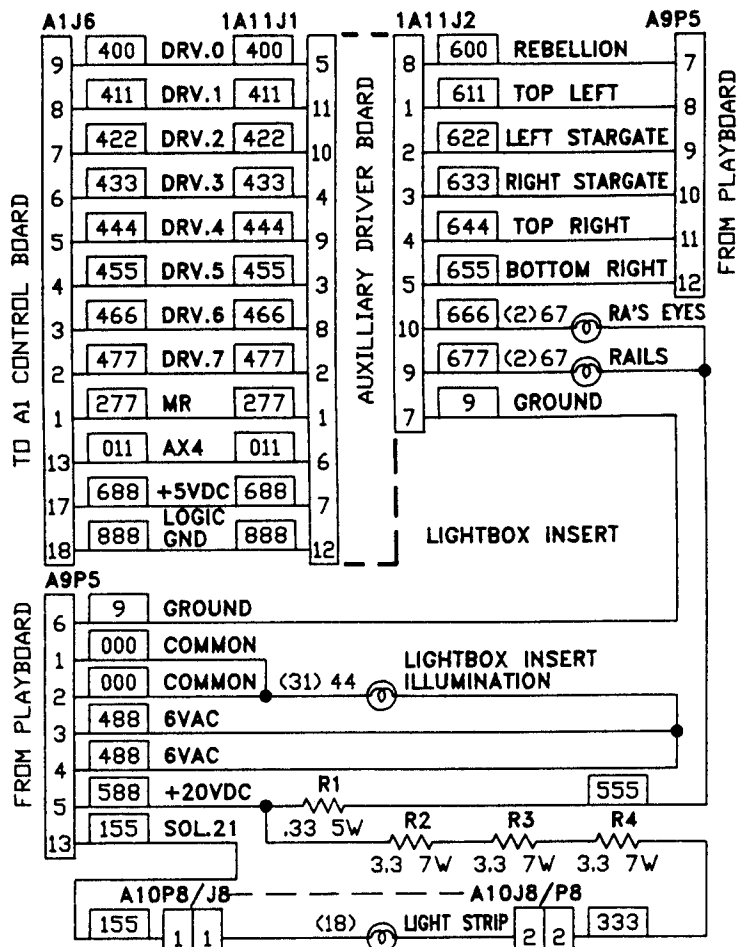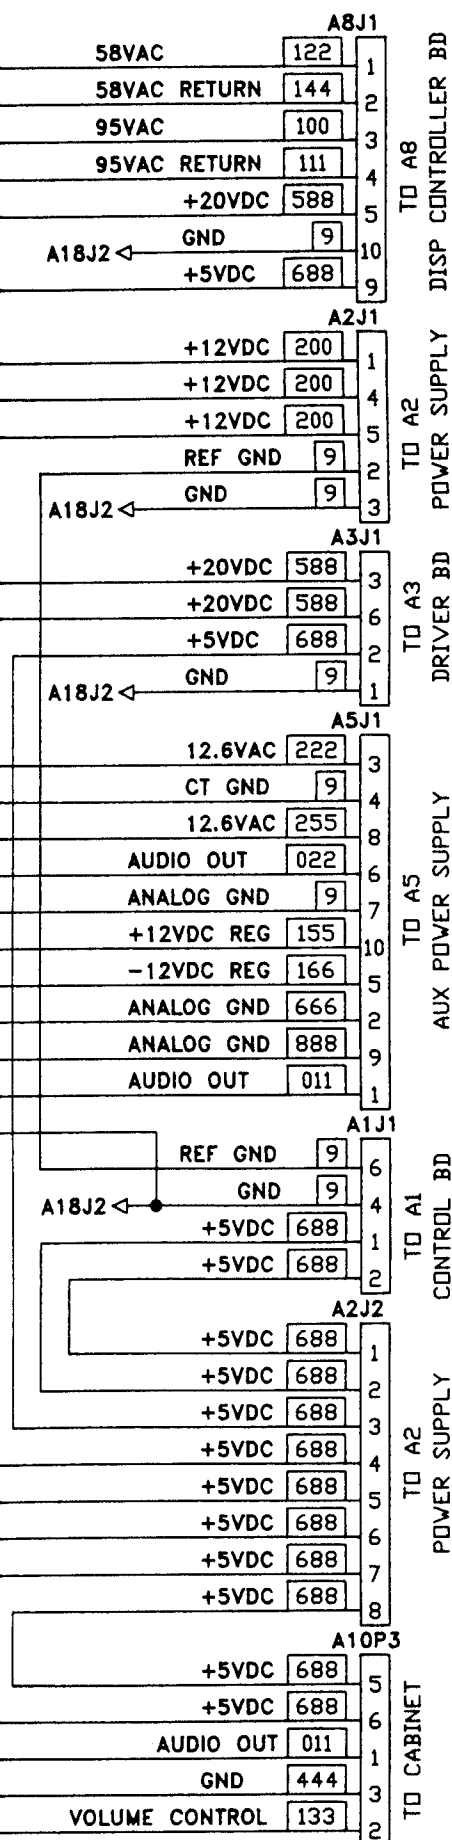


COLOR CODE		
0	BLACK	5 GREEN
1	BROWN	6 BLUE
2	RED	7 VIOLET
3	ORANGE	8 GRAY
4	YELLOW	9 WHITE

Premier Technology			
TITLE LIGHTBOX/PLAYBOARD			
SCHEMATIC DIAGRAM			
USED ON #742	DRAWN RLM	DATE 01-24-95	30702


VI. WIRING AND SCHEMATIC

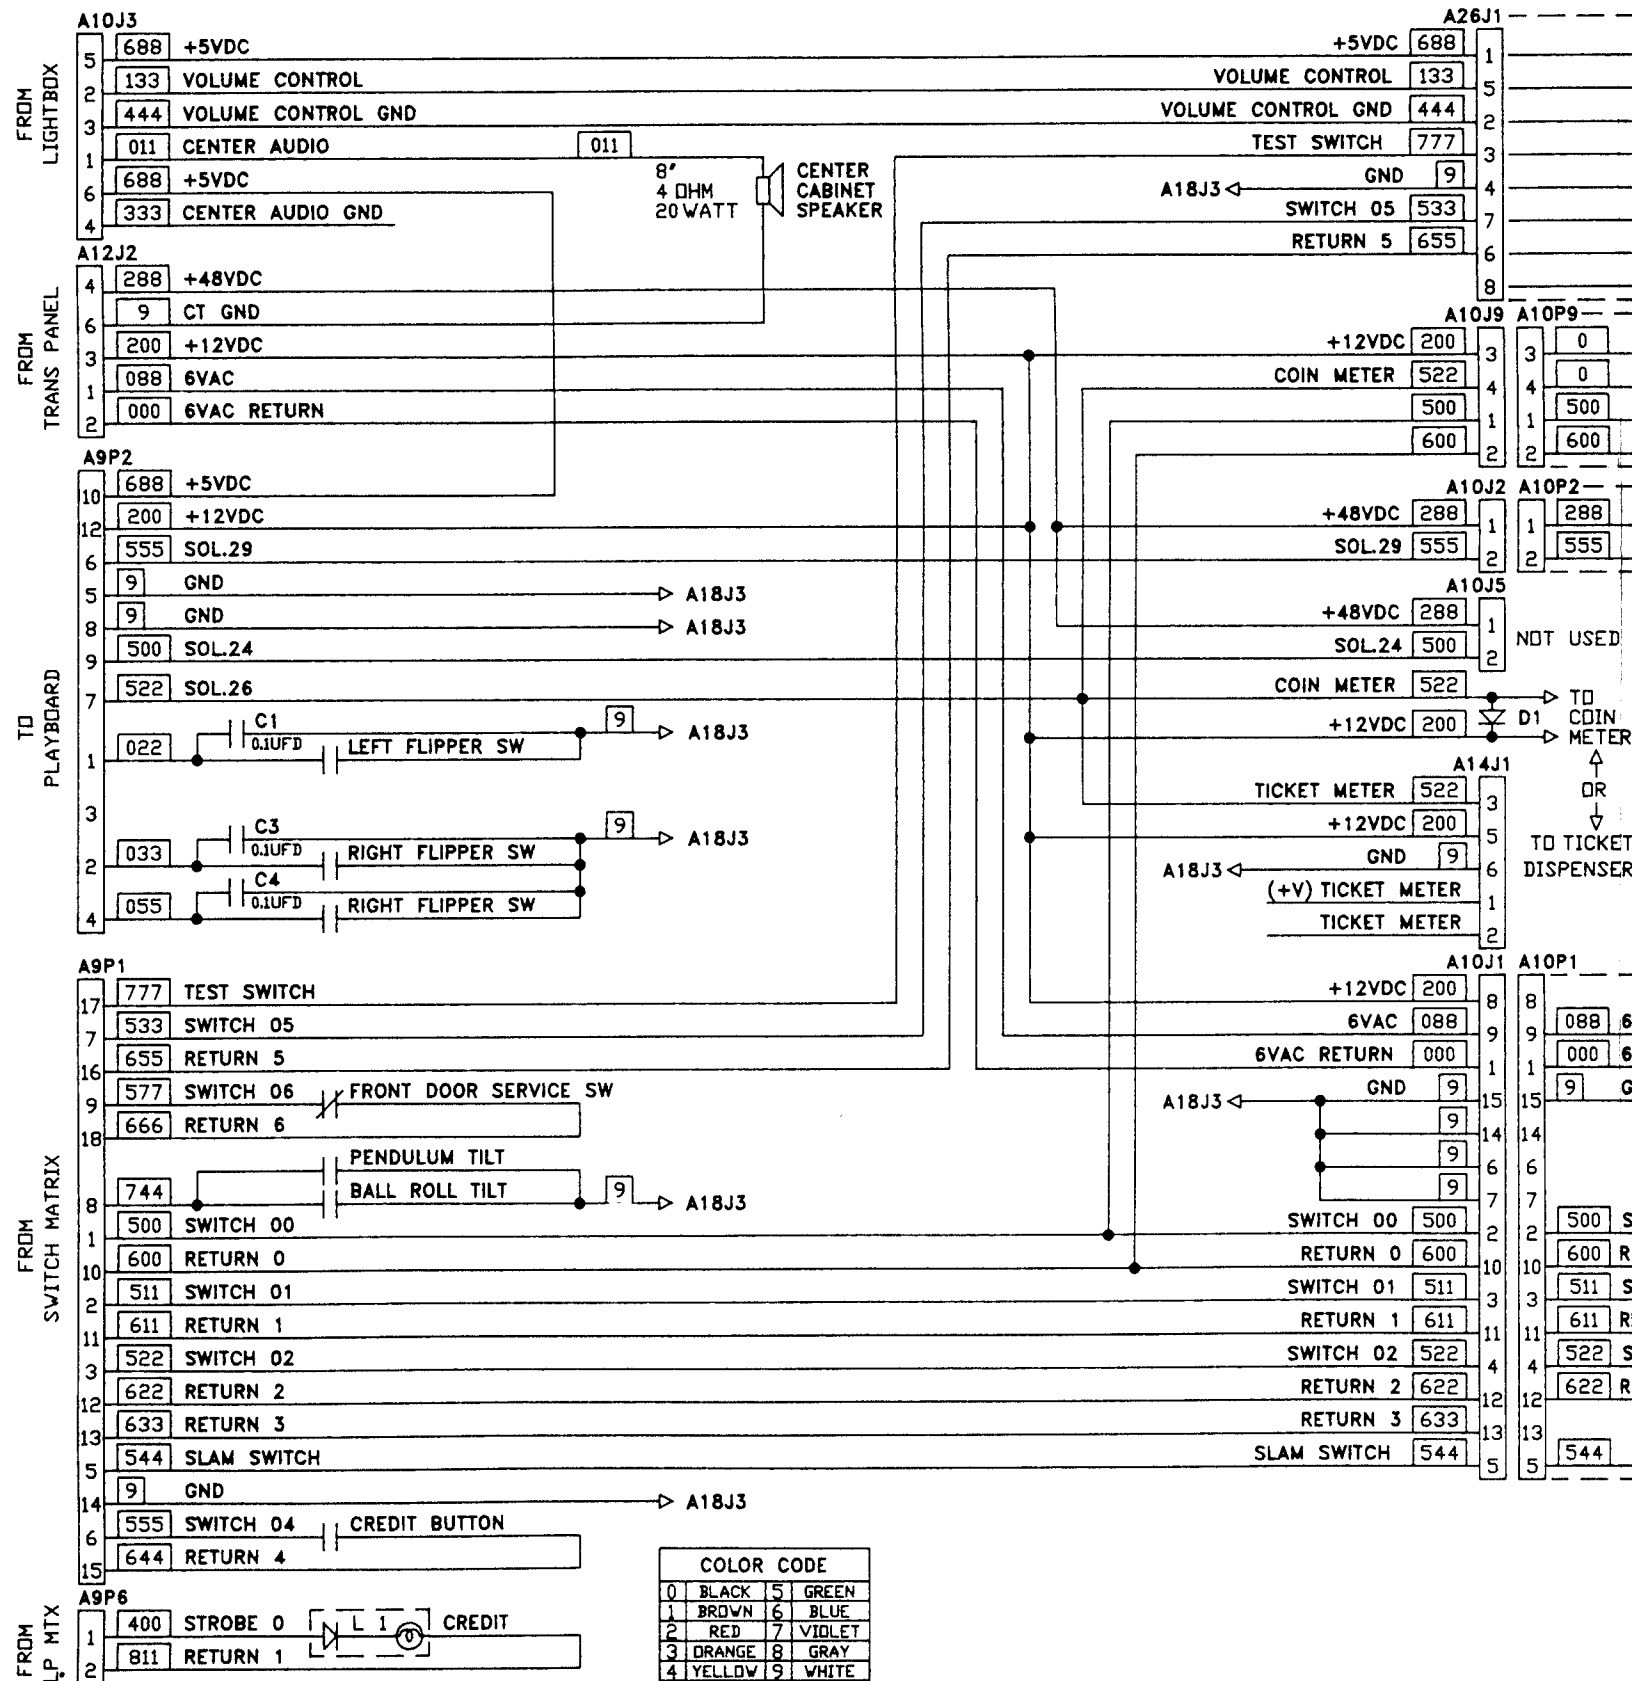

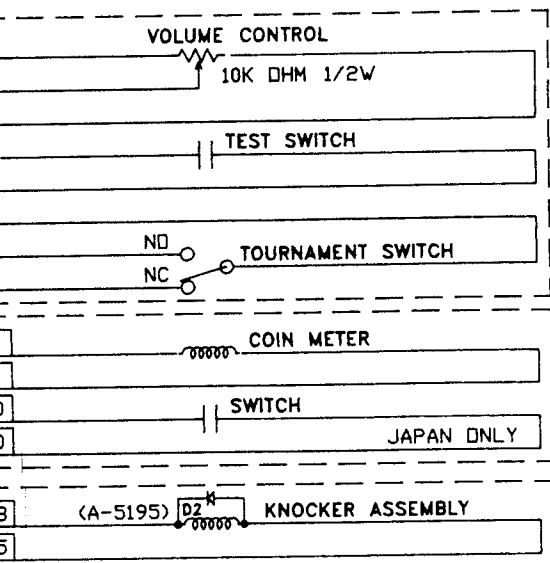



NOTE:

1. AMOUNT OF PARTS VARIES PER GAME.
2. ALL DIODES ARE TYPE 1N4004.
3. A18J3 (FROM TRANSFORMER PANEL).

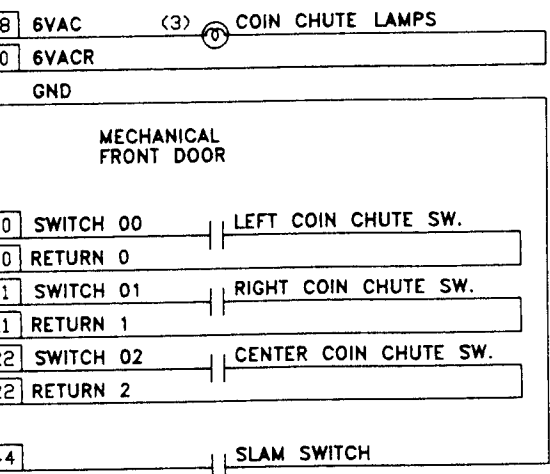


Premier Technology

TITLE CABINET/FRONT DOOR SCHEMATIC DIAGRAM			
USED ON #742	DRAWN RLM	DATE 01-24-95	30701

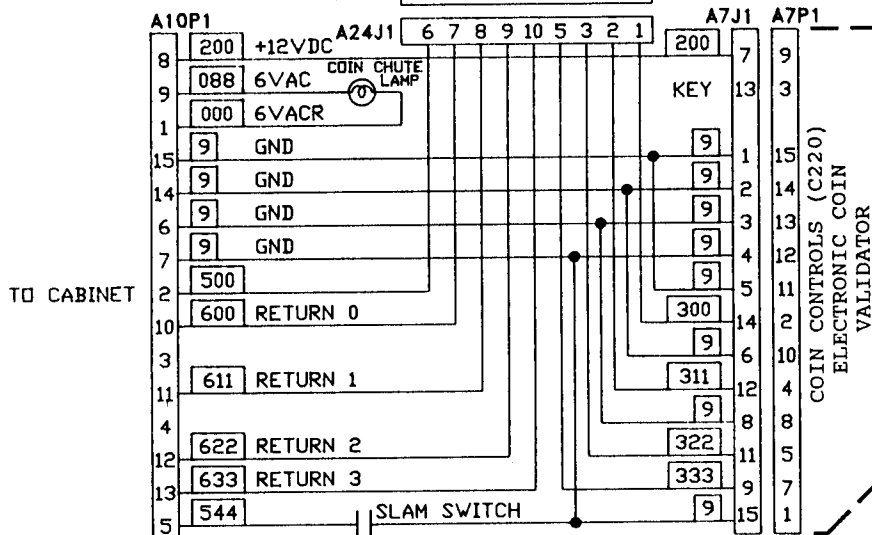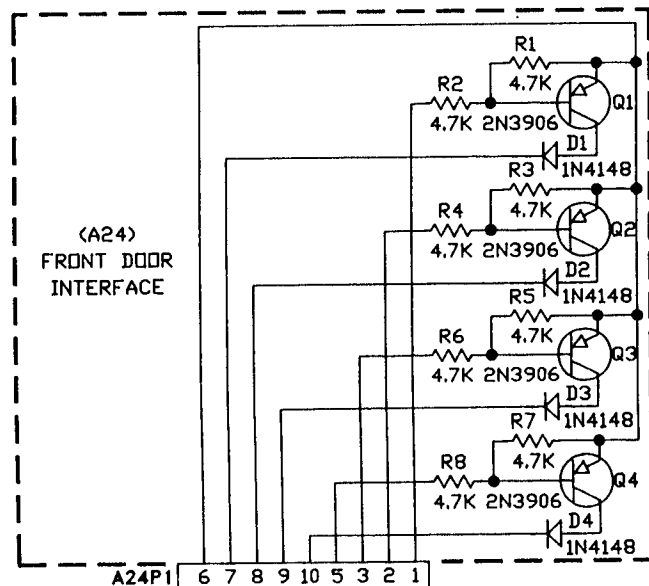

(A24) FRONT DOOR INTERFACE COMPONENT LOCATION

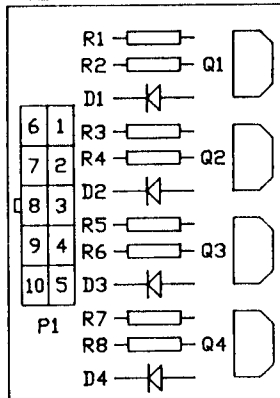

(A24) FRONT DOOR INTERFACE PARTS LIST

REFERENCE DESCRIPTION	PART NO.
FRONT DOOR INTERFACE ASSEMBLY	MA1645
D1-D4 DIODE, 1N4148	X0-261
Q1-Q4 TRANSISTOR, PNP, 2N3906	X0-588
R1-R8 RESISTOR, 4.7K OHM, 1/4W, 5%	X0-7
A24P1 HEADER, 10 POSITION	X0-912
SPACER (4)	23984

COLOR CODE

0 BLACK	5 GREEN
1 BROWN	6 BLUE
2 RED	7 VIOLET
3 ORANGE	8 GRAY
4 YELLOW	9 WHITE

Premier Technology

TITLE SCHEMATIC DIAGRAM			
ELECTRONIC FRONT DOOR-4 OUTPUT			
USED ON	DRAWN RLM	DATE 09-20-91	28541

VII. PARTS INFORMATION


TABLE OF CONTENTS

	PAGE(S)
CABINET PARTS.....	64
PLAYBOARD PARTS (SWITCHES).....	65
PLAYBOARD PARTS (LAMPS).....	66
PLAYBOARD PARTS (RUBBER RINGS AND MISCELLANEOUS PARTS).....	67
FLIPPER PARTS EXPLODED VIEW.....	68
UPKICKER PARTS EXPLODED VIEW.....	69
POP BUMPER PARTS EXPLODED VIEW.....	70
DROP TARGET PARTS EXPLODED VIEW	71
DROP TARGET PARTS EXPLODED VIEW	72-73
TARGET ASSEMBLY EXPLODED VIEW.....	74
KICKING TARGET ASSEMBLY EXPLODED VIEW.....	75
SPACESHIP AND BRACKET ASSEMBLY, MOTOR AND SUPPORT ASSEMBLY, PYRAMID AND MECHANICAL ASSEMBLY, ASSEMBLY VIEWS.....	76
MOTOR AND SUPPORT ASSEMBLY, ASSEMBLY VIEW.....	77
PIVOT UNIT AND TARGET ASSEMBLY ASSEMBLY VIEW.....	78
PIVOT POST MECHANISM ASSEMBLY ASSEMBLY VIEW.....	79
LIGHTBOX INSERT ASSEMBLY ASSEMBLY VIEW.....	80
LIGHTBOX INSERT LAMP IDENTIFICATION.....	81
UNIQUE PARTS.....	82

VII. PARTS INFORMATION

CABINET PARTS

ITEM	DESCRIPTION	PART NO.
1	Cabinet Screened	30738-742
2	Lightbox Mounting Thumb Screw (2) (Not Shown for Reference Only, Part of Lightbox Assembly)	FA-162
3	Butt Hinge (2) (Attached to Lightbox)	26449
4	"U" Bolt (P/O Lightbox) Latch Assembly (P/O Cabinet)	24659 21969
5	Line Cord (Domestic) Line Cord Cover Plate	23365 23364
6	Speaker, 4 Ohm, 8" Speaker Grille	28934 28935
7	Prop Stick, Playfield	23940
8	Right Flipper Switch Assembly (Switch with Bracket) (Switch Only)	28693 28668
9	Left Flipper Switch Assembly (Switch with Bracket) (Switch Only)	28690 28691
10	Ball Shooter Assembly	26314
11	Front Door Assembly (Universal) Cable Assembly Slam Switch (N/O) 6V DC Lamp, Wedge Base, #555 Lampholder	29106 MA-2043 26130 LA-2 FD-24
12	Replay Switch Assembly	18092
13	Cashbox Cover	28032
14	Plumb Bob Tilt Switch Assembly Strike Plate Carbon, Tilt Bob Rod, Tilt Bracket Clip	*SEE NOTE 358 30879 357 22043 14653 MA-12
15	Knocker Assembly 5" Bell Assembly (When Used)	27591
16	Cabinet Leg (4), 31" Leg Bolt (8) 1-1/2" Leg Adjuster (4) 3/8-16", Jam Nut (8)	3768 3775 30121 FA-665
17	Transformer Panel Assembly Bridge Rectifier (3) Capacitor, (10,000UF), 25V Capacitor, (33,000UF), 35V Fuse Holder and Cap Fuse Block (8 Pole) F3, 3/8 Amp, SLO-BLO F4, 3/8 Amp, SLO-BLO F5, 2-1/2 Amp, SLO-BLO F6, 10 Amp, SLO-BLO F7, 8 Amp, SLO-BLO F8, 10 Amp F9, 7-1/2 Amp F10, 3 Amp, SLO-BLO F11, 3 Amp, SLO-BLO Transformer	MA-2037 EL-42 XO-830 XO-957 EL-78 EL-10 EL-31 EL-31 EL-21 EL-36 EL-26 EL-23 EL-22 EL-9 EL-9 29724
18	Cabinet Pivot Bracket (Left) Cabinet Pivot Bracket (Right)	25658 25657
19	Game Controls Board (A26)	MA-1851
20	Ball Roll Tilt Housing and Switch Assembly Switch	24394 24393 28700
21	Right Moulding (Not Shown)	28701
22	Left Moulding (Not Shown)	16951
23	Front Moulding (Not Shown)	MA-1872
24	Relay Strip Assembly "Q" Relay "T" Relay "A" Relay	MA-1172 MA-25 MA-1021
25	Power Module Assembly (110V AC) Double Throw Switch Fuse Holder And Cap (2) Line Filter Power Module Assembly (FRANCE) Power Module Assembly (GERMANY) Power Module Assembly (JAPAN) Power Module Assembly (220V AC) F1, 8 Amp SLO-BLO, 110V AC 4 Amp SLO-BLO, 220V AC F2, 5 Amp SLO-BLO, 110V AC 2.5 Amp SLO-BLO, 220V AC	MA-1928 23799 EL-78 EL-50 30255A 30255B 30255C 30255D EL-26 EL-33 EL-8 EL-21

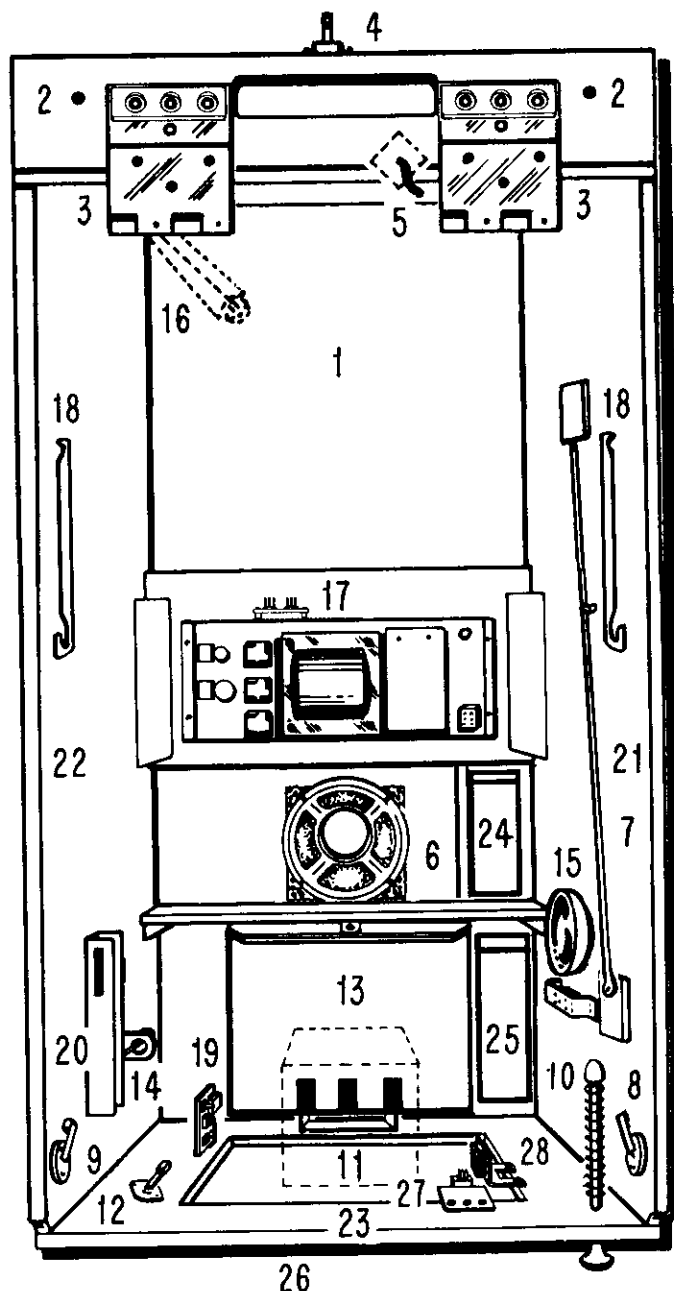


ITEM	DESCRIPTION	PART NO.
26	Lock Bar (Not Shown) Lock Bracket (Not Shown) Lock Bar Bracket (Not Shown)	29759 29760 29761
27	Front Door Service Switch Assembly Switch Bracket Switch	29451 29305
28	Interlock Switch Assembly Switch Bracket Switch Cover Switch Insulator	29148 29145 EL-66 24145

*NOTE:
COVER USED WITH ELECTRONIC DOOR
OR 3 CHUTE DOOR, PART NO. 28062

COVER USED WITH 2 CHUTE DOOR WITH
\$1.00 ACCEPTOR SLOT, PART NO. 30002



VII. PARTS INFORMATION

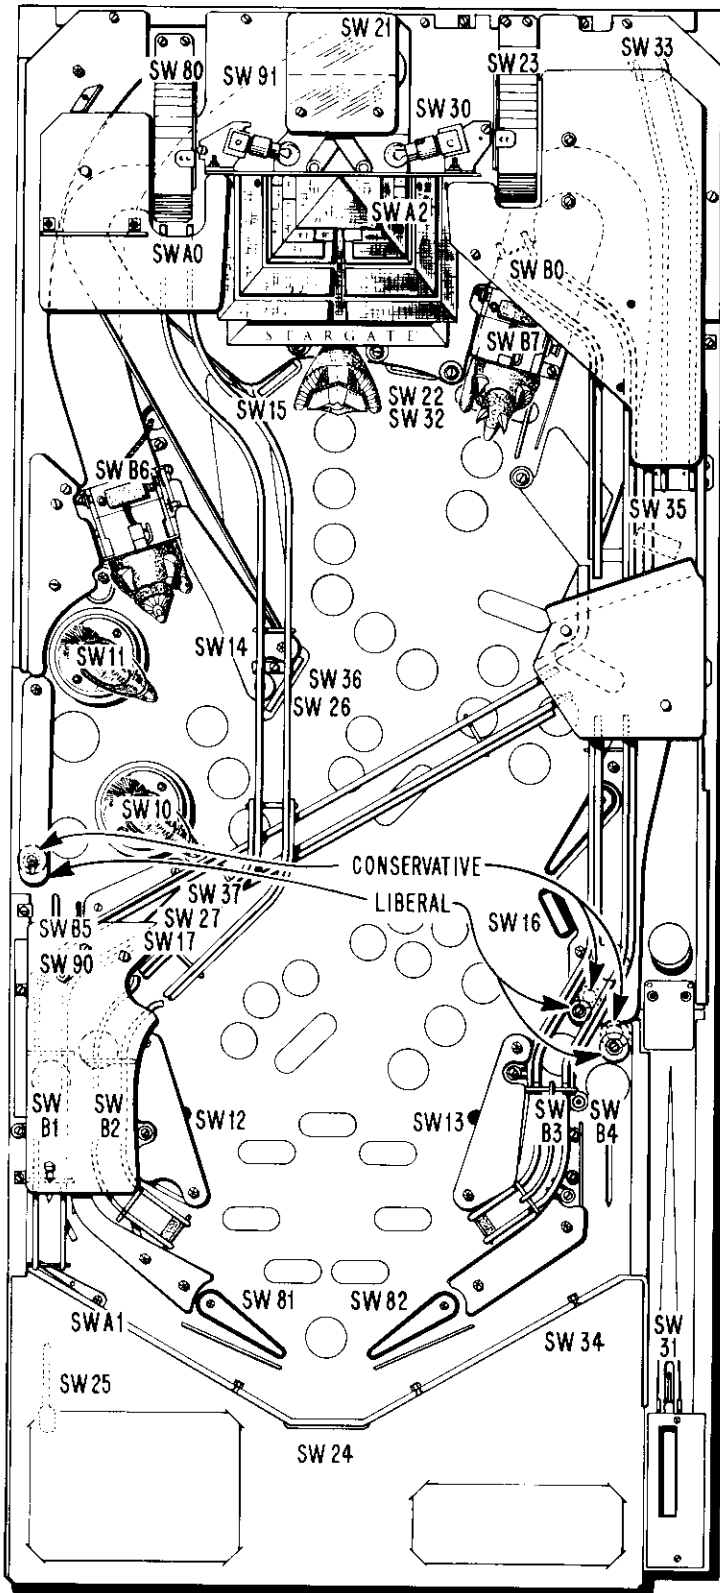

PLAYBOARD SWITCH ASSIGNMENTS

SWITCH MATRIX NUMBER	SWITCH ASSIGNMENT	PART NO.
SW 0	LEFT COIN CHUTE (#1)	P/O FRONT DOOR
SW 1	RIGHT COIN CHUTE (#2)	P/O FRONT DOOR
SW 2	CENTER COIN CHUTE (#3)	P/O FRONT DOOR
SW 3	COIN CHUTE (#4)	P/O ELECTRONIC DOOR
SW 4	START (CREDIT) BUTTON	18092
SW 5	TOURNAMENT	X0-1193
SW 6	FRONT DOOR (SERVICE)	29305
SW 7	(NOT USED)	
*SW 10	BOTTOM POP BUMPER	29819
*SW 11	TOP POP BUMPER	29819
SW 12	LEFT KICKING RUBBER (2)	27702
SW 13	RIGHT KICKING RUBBER (2)	27702
SW 14	LEFT KICKING TARGET	28511
SW 15	CENTER KICKING TARGET	28511
SW 16	RIGHT KICKING TARGET	28511
SW 17	LEFT DROP TARGET #1	18094
SW 20	(NOT USED)	
SW 21	GLIDER MOTOR STOP	27667A
*SW 22	BULLSEYE TARGET (INNER)	P/O 27544
SW 23	TOP CENTER UPKICKER	27667A
SW 24	OUTHOLE	26927
SW 25	LOWER LEFT KICKER	25938
SW 26	CENTER DROP TARGET #1	25896
SW 27	LEFT DROP TARGET #2	18095
SW 30	GLIDER RIGHT (MOTOR)	27667A
SW 31	SHOOTER LANE ROLLOVER	25938
*SW 32	BULLSEYE TARGET (OUTER)	P/O 27544
SW 33	TOP RIGHT UPKICKER	27667A
SW 34	TROUGH	25938
SW 35	ROLLOVER DROP TARGET	25895
SW 36	CENTER DROP TARGET #2	25897
SW 37	LEFT DROP TARGET #3	18093
SW 40	(NOT USED)	
THRU	(NOT USED)	
SW 77	(NOT USED)	
SW 80	TOP LEFT UPKICKER (OPTICAL INTERFACE)	P/O MA-1925
SW 81	LEFT FLIPPER (SENSOR BOARD)	P/O MA-1334
SW 82	RIGHT FLIPPER (SENSOR BOARD)	P/O MA-1334
SW 83	(NOT USED)	
THRU	(NOT USED)	
SW 87	(NOT USED)	
SW 90	LOWER LEFT RAMP (OPTICAL INTERFACE)	P/O MA-1925
SW 91	TOP PYRAMID TROUGH (OPTICAL INTERFACE)	P/O MA-1558
SW 92	(NOT USED)	
THRU	(NOT USED)	
SW 97	(NOT USED)	
SW A0	TOP LEFT RAMP (OPTICAL INTERFACE)	P/O MA-1925
SW A1	BALL GATE (END OF STROKE)	31232
SW A2	PYRAMID (END OF STROKE)	31185
SW A3	(NOT USED)	
THRU	(NOT USED)	
SW A7	(NOT USED)	
SW B0	TOP RIGHT RAMP (OPTICAL INTERFACE)	P/O MA-1925
*SW B1	LEFT OUTSIDE ROLLOVER	28625
*SW B2	LEFT RETURN ROLLOVER	28625
*SW B3	RIGHT RETURN ROLLOVER	28625
*SW B4	RIGHT OUTSIDE ROLLOVER	28625
*SW B5	LEFT SIDE ROLLOVER	28625
*SW B6	LEFT PIVOT TARGET	30726
*SW B7	RIGHT PIVOT TARGET	30726

* SMART SWITCH™

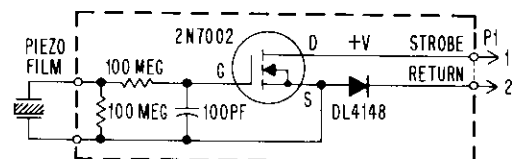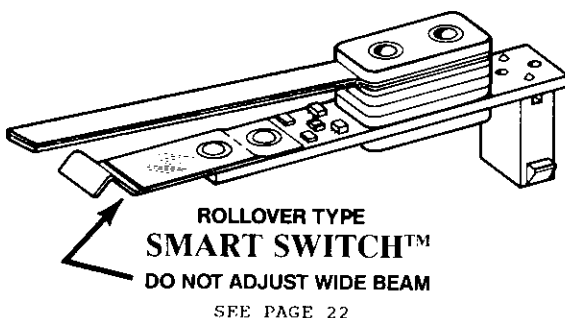

SCHEMATIC REPRESENTATION

VII. PARTS INFORMATION


PLAYBOARD LAMP ASSIGNMENTS

LAMP NUMBER LAMP ASSIGNMENT

L0	"SHOOT AGAIN"
L1	Credit Button
L2	
THRU	(Not Used)
L4	
L5	Pyramid Feature
L6	"DOUBLE"
L7	Bracelet
L10	(Not Used)
L11	"SAVE"
L12	"OPEN"
L13	"OPEN"
L14	"SPECIAL"
L15	Pyramid Feature
L16	"COMBO"
L17	Transporter
L20	(Not Used)
L21	"QUARTZ"
L22	"5M"
L23	"10M"
L24	"20M"
L25	Pyramid Feature
L26	"HURRY-UP"
L27	"SARCOPHAGUS"
L30	(Not Used)
L31	(Not Used)
L32	"DOUBLE"
L33	"40M"
L34	"80M"
L35	Pyramid Feature
L36	"COMBO"
L37	"SPELL STARGATE"
L41	Bottom Pop Bumper
L42	Top Pop Bumper
L43	"EXTRA BALL"
L44	"HORUS" Guard
L45	Pyramid Feature
L46	"BEGIN"
L47	"LIGHT DOUBLE"
L50	
THRU	(Not Used)
L54	
L55	Pyramid Feature
L56	"COMBO"
L57	Eye of Ra (Pyramid)
L60	
THRU	(Not Used)
L64	
L65	Pyramid Feature
L66	"COMBO"
L67	"QUARTZ TRADE"
L70	(Not Used)
L71	Eye of Ra
L72	"GLIDER CRAFT"
L73	"REBELLION" Round 2
L74	"RA'S TEMPLE"
L75	"QUARTZ"
L76	"BATTLE"
L77	"SAVE SARI"
L80	(Not Used)
L81	"TRANSPORTER"
L82	"HURRY-UP"
L83	"PYRAMID"
L84	"QUARTZ"
L85	"SPELL STARGATE"
L86	"COMBO"
L87	"SARCOPHAGUS"
*L90	Lightbox #1
*L91	Lightbox #2
*L92	Lightbox #3
L93	
THRU	(Not Used)
L97	
*LA0	Lightbox #4
*LA1	Lightbox #5
*LA2	Lightbox #6
LA3	
THRU	(Not Used)
LA7	
*LB0	Lightbox #7
*LB1	Lightbox #8
*LB2	Lightbox #9
LB3	
THRU	(Not Used)
LB7	

LAMP SOCKETS WITH DIODE BOARD

TYPE	PART NO.
1-1/8" BRACKET	26621
1/2" BRACKET	26622
LAYDOWN	26623

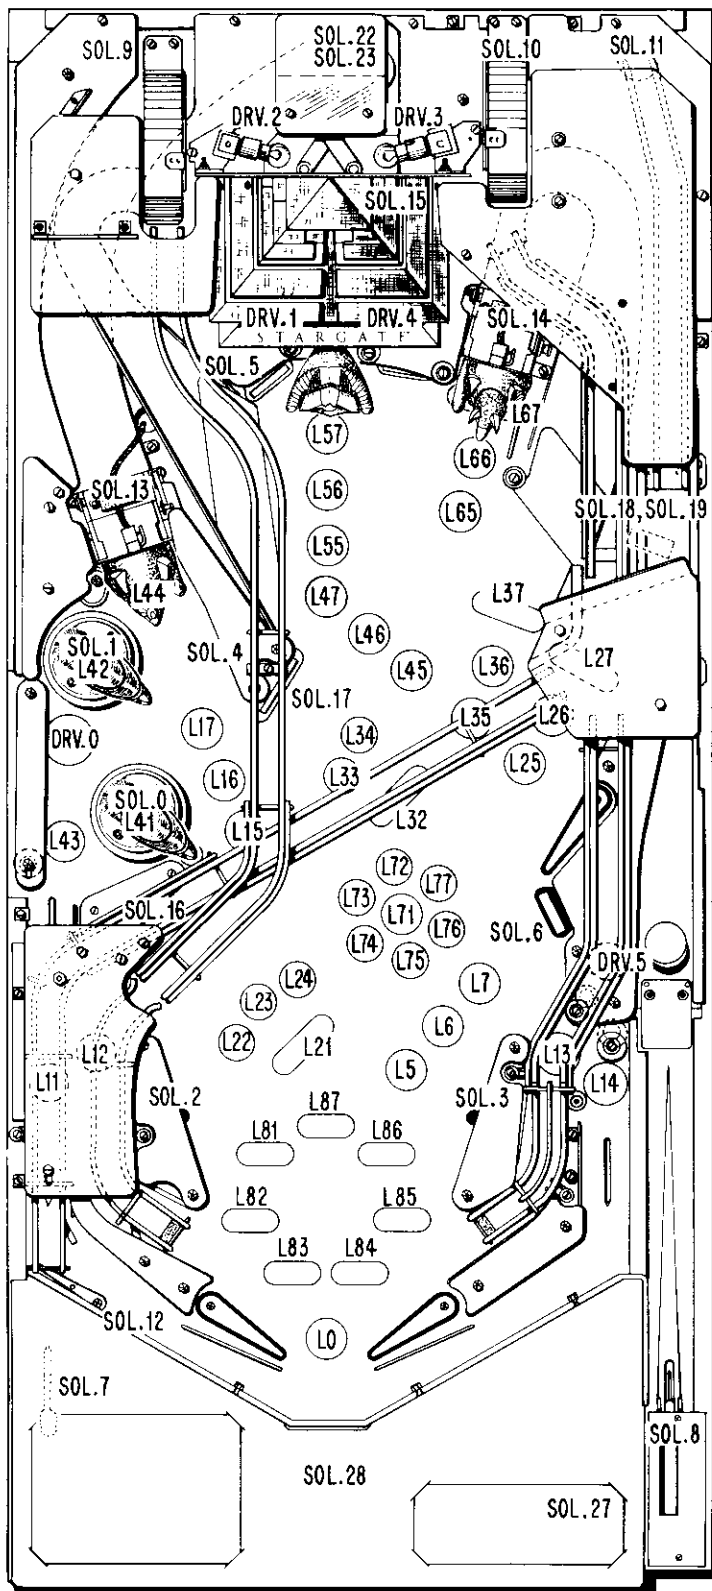

SOLENOID, DRIVER FUNCTIONS/LOCATIONS

SOL. 0	BOTTOM POP BUMPER	SOL. 20	(NOT USED)
SOL. 1	TOP POP BUMPER	*SOL. 21	ROPE LIGHTS
SOL. 2	LEFT KICKING RUBBER	SOL. 22	(LEFT & RIGHT) GLIDER MOTOR
SOL. 3	RIGHT KICKING RUBBER	SOL. 23	(FORWARD) GLIDER MOTOR
SOL. 4	LEFT KICKING TARGET	SOL. 24	(NOT USED)
SOL. 5	CENTER KICKING TARGET	SOL. 25	LIGHTBOX ILLUM. RELAY (A)
SOL. 6	RIGHT KICKING TARGET	SOL. 26	TICKET/COIN METER ENABLE
SOL. 7	LOWER LEFT KICKER	SOL. 27	BALL RELEASE
SOL. 8	SHOOTER LANE KICKER	SOL. 28	OUTHOLE
SOL. 9	TOP LEFT UPKICKER	SOL. 29	KNOCKER
SOL. 10	TOP CENTER UPKICKER	SOL. 30	TILT RELAY (T)
SOL. 11	TOP RIGHT UPKICKER	SOL. 31	GAME OVER RELAY (Q)
SOL. 12	LOWER LEFT BALL GATE	DRV. 0	REBELLION, #67
SOL. 13	LEFT PIVOT TARGET	DRV. 1	TOP LEFT, #67
SOL. 14	RIGHT PIVOT TARGET	DRV. 2	LEFT STARGATE, #67
SOL. 15	PYRAMID UNIT	DRV. 3	RIGHT STARGATE, #67
SOL. 16	3 BANK TARGET RESET	DRV. 4	TOP RIGHT, #67
SOL. 17	2 BANK TARGET RESET	DRV. 5	BOTTOM RIGHT, #67
SOL. 18	ROLLOVER TARGET RESET	*DRV. 6	RA'S EYES, #67 (2)
SOL. 19	ROLLOVER TARGET TRIP	*DRV. 7	RATLS, #67 (2)

NOTE:
*LAMPS MOUNTED ON LIGHTBOX INSERT,
SEE PAGE 81 FOR LOCATION.

VII. PARTS INFORMATION

PLAYBOARD PARTS INFORMATION

PARTS LIST

ITEM	DESCRIPTION	PART NO.
1	PLASTIC SHIELD ASSEMBLY #1-742	30751-E
2	BALL DEFLECTOR	25594
3	PLASTIC SHIELD ASSEMBLY #1-742	30751-G
4	PLASTIC SHIELD ASSEMBLY #1-742	30751-H
5	PLASTIC SHIELD ASSEMBLY #1-742	37051-A
6	UPKICKER ASSEMBLY (2)	MA-1789
7	(SEE EXPLODED VIEW ILLUSTRATION)	
8	PLASTIC SHIELD SET, #1-742	30751
9	SPACESHIP AND BRACKET ASSEMBLY	31108
10	MOTOR AND SUPPORT ASSEMBLY	31122
11	PYRAMID AND MECHANICAL ASSEMBLY	31239
12	(SEE ASSEMBLY ILLUSTRATION)	
13	MOTOR AND SUPPORT ASSEMBLY	31121
14	(SEE ASSEMBLY ILLUSTRATION)	
15	UPKICKER SCOOP AND SHIELD ASSEMBLY	31182
16	UPKICKER SCOOP AND SHIELD ASSEMBLY	31180
17	SPACESHIP SUPPORT ASSEMBLY	31308
18	SPACESHIP SUPPORT PLATE BRACKET (2)	31259
19	PLASTIC SHIELD ASSEMBLY #1-742	30751-F
20	PLASTIC SHIELD ASSEMBLY #1-742	30751-B-D
21	WIREFORM RAMP AND PEM STUDS ASSEMBLY	31244
22	METAL RAMP AND OPTO ASSEMBLY	31235
23	RAMP FLAP (MEDIUM)	31242
24	WIREFORM RAMP	31157
25	UPKICKER AND OPTO ASSEMBLY	30465
26	WIREFORM RAMP	31160
27	METAL RAMP AND FLAP ASSEMBLY	31251
28	KICKING TARGET ASSEMBLY (3)	MA-2107
29	(SEE EXPLODED VIEW ILLUSTRATION)	
30	TARGET DECAL (2)	31249
31	TARGET DECAL	31250
32	TARGET ASSEMBLY	29714
33	(SEE EXPLODED VIEW ILLUSTRATION)	
34	TARGET DECAL	31248
35	PIVOT UNIT AND TARGET ASSEMBLY (2)	30728
36	MOLDED "HORUS" FIGURE	31221
37	MOLDED "ANUBIS" FIGURE	31222
38	MOLDED RAMPS AND BRACKET ASSEMBLY	31166
39	ROLLOVER DROP TARGET ASSEMBLY	MA-1504
40	(SEE EXPLODED VIEW ILLUSTRATION)	
41	ROLLOVER DROP TARGET (WHITE)	208922
42	ROLLOVER DROP TARGET DECAL	31254
43	BALL GUIDE RAIL	3722
44	WIREFORM RAMP	31161
45	RIGHT SIDE FLIPPER ASSEMBLIES (2)	MA-1791
46	(SEE EXPLODED VIEW ILLUSTRATION)	
47	COIL AND DIODE ASSEMBLY (2)	25959
48	FLIPPER SWITCH ASSEMBLY (2)	26438
49	DROP TARGET ASSEMBLY (2 BANK)	MA-2042
50	(SEE EXPLODED VIEW ILLUSTRATION)	
51	DROP TARGET (WHITE) NYLON (5)	119052
52	DROP TARGET DECAL (5)	31253
53	DROP TARGET ASSEMBLY (3 BANK)	MA-2106
54	(SEE EXPLODED VIEW ILLUSTRATION)	
55	POP BUMPER ASSEMBLY	-----
56	(SEE EXPLODED VIEW ILLUSTRATION)	
57	POP BUMPER BRACKET AND COIL ASSEMBLY (2)	MA-1375
58	POP BUMPER COIL AND DIODE (2)	16570
59	POP BUMPER SWITCH AND BRACKET	29819
60	POP BUMPER BODY AND SOCKET	MA-1467
61	BALL SNUBBER	30713
62	WIREFORM RAMP	31159
63	CELLULAR BUMPER (2)	29974
64	POLYURETHANE BUMPER	28274
65	LEFT SIDE FLIPPER ASSEMBLY	MA-1790
66	(SEE EXPLODED VIEW ILLUSTRATION)	
67	COIL AND DIODE ASSEMBLY	25959
68	FLIPPER SWITCH ASSEMBLY	26439
69	KICKER ASSEMBLY	MA-1083
70	KICKER ASSEMBLY	MA-1373
71	PIVOT POST MECHANISM ASSEMBLY	31287
72	(SEE ASSEMBLY ILLUSTRATION)	
73	SNUBBER RAIL (2)	13798
74	CARDHOLDER AND FENCE ASSEMBLY	31173
75	CARDHOLDER SCREENED	30796
76	MYLAR OVERLAY	30739
77	STEEL BALL, 1-1/16" DIAMETER	21864
78	SHOOTER GAUGE AND PLASTIC ASSEMBLY	27980-742
79	BALL SHOOTER ASSEMBLY	30972

RUBBER RINGS

ITEM	DESCRIPTION	PART NO.
A	1"	10219
B	BUMPER, TAPERED (BLK)	30003Y
C	2-1/2"	10222
D	1-1/2" (BLK)	10220Y
E	2"	10221
F	2-1/2" (BLK)	10222Y
G	3/8"	10217
H	MINI-POST, LARGE	15705
J	MINI-POST, SMALL	14793
K	SIAMESE	17493
L	FLIPPER, (BLK)	28546

MISCELLANEOUS PARTS

DESCRIPTION	PART NO.
MINI-POST SCREW	14792
HAIRPIN CLIP	6947
RUBBER GROMMET	5240
HEX POST WITH GRIP	26531
PLASTIC RIVET (BLK)	MP-10
PLASTIC POST, 1" (RED)	11561U
PLASTIC POST (RED)	20635U
SIAMESE POST (CLEAR)	17492P


VII. PARTS INFORMATION

FLIPPER PARTS

REPAIR NOTE:
BEFORE INSERTING ITEM 1,
PLACE ONE DROP OF SAF-T-LOK
T70 THREAD LOCKING COMPOUND
INTO THE THREADED HOLE OF ITEM 4.

NOTE:
ITEMS 1 THRU 4 ARE NOT PART
OF THE FLIPPER ASSEMBLY.


ITEM	DESCRIPTION	PART NO.
1	FLIPPER ASSEMBLY, LEFT SIDE (ILLUSTRATED)	MA-1790
2	FLIPPER ASSEMBLY, RIGHT SIDE	MA-1791
3	8-32 X 1/2" OVAL HEAD MS	FA-77
4	FLIPPER SHAFT ASSEMBLY	13151 OR
5	FLIPPER SHAFT BEARING	28546
6	FLIPPER SHAFT BEARING	25972Y
7	FRAME, LEFT SIDE (ILLUSTRATED)	26497
8	FRAME, RIGHT SIDE (ILLUSTRATED)	FA-90
9	SWITCH ASSEMBLY, LEFT SIDE (ILLUSTRATED)	25961
10	SWITCH ASSEMBLY, RIGHT SIDE	29158
11	CAPACITOR, 2.2UF, 200V	29157
12	SWITCH COVER	26438
13	5-40 X 3/4" RHMS SEMS (2)	XO-995
14	8-32 X 3/8" RHMS SEMS (2)	465
15	STOP STUD AND BRACKET ASSEMBLY	FA-3
16	SLIP-IN CORE	FA-69
17	COIL WITH DIODE (SEE SCHEMATIC DIAGRAM)	29154
18	SPRING WASHER	5065
19	COIL MOUNTING BRACKET	FA-605
20	LINK AND PLUNGER ASSEMBLY	16356
21	FLIPPER SPRING	25956
22	RETAINING RING	3232
	FLIPPER LEVER ASSEMBLY, LEFT SIDE (ILLUSTRATED)	FA-682
	FLIPPER LEVER ASSEMBLY, RIGHT SIDE	26014
	BRACKET	26013
	#10 SPLIT LOCKWASHER (3)	17184
		FA-634

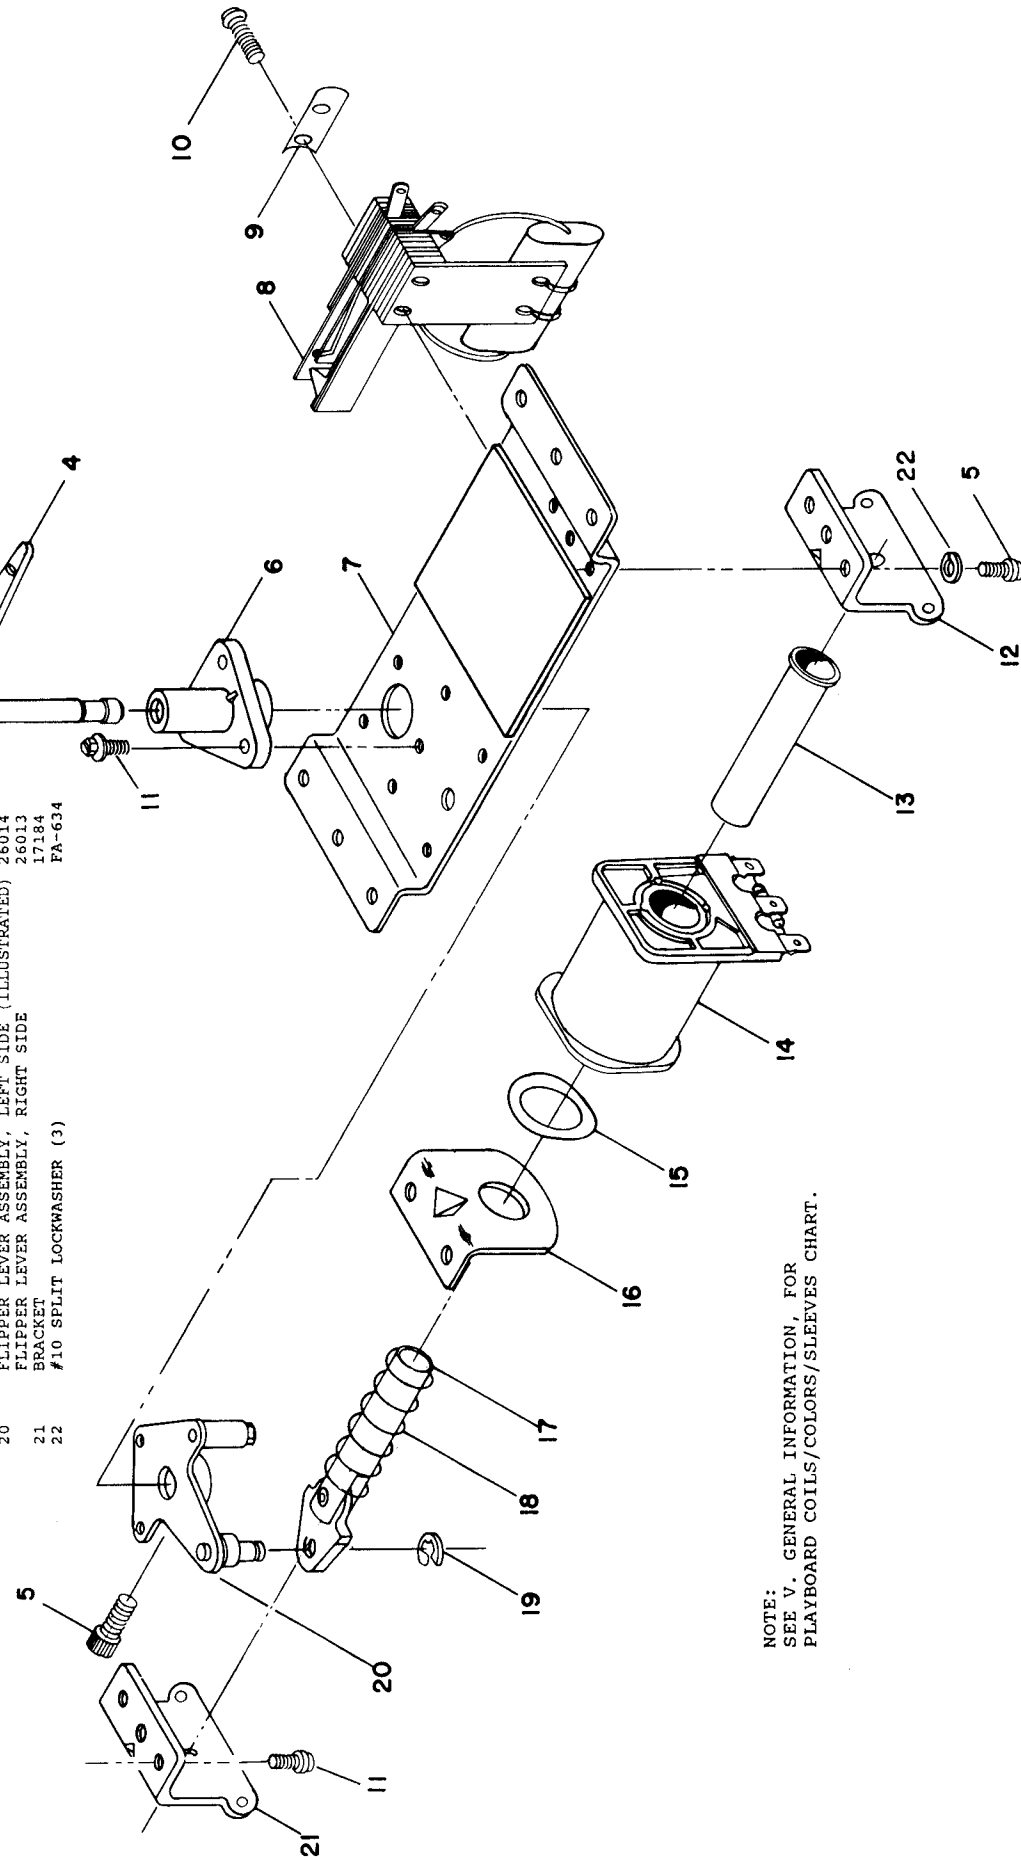

NOTE:
SEE V. GENERAL INFORMATION, FOR
PLAYBOARD COILS/COLORS/SLEEVES CHART.

VII. PARTS INFORMATION

UPKICKER PARTS

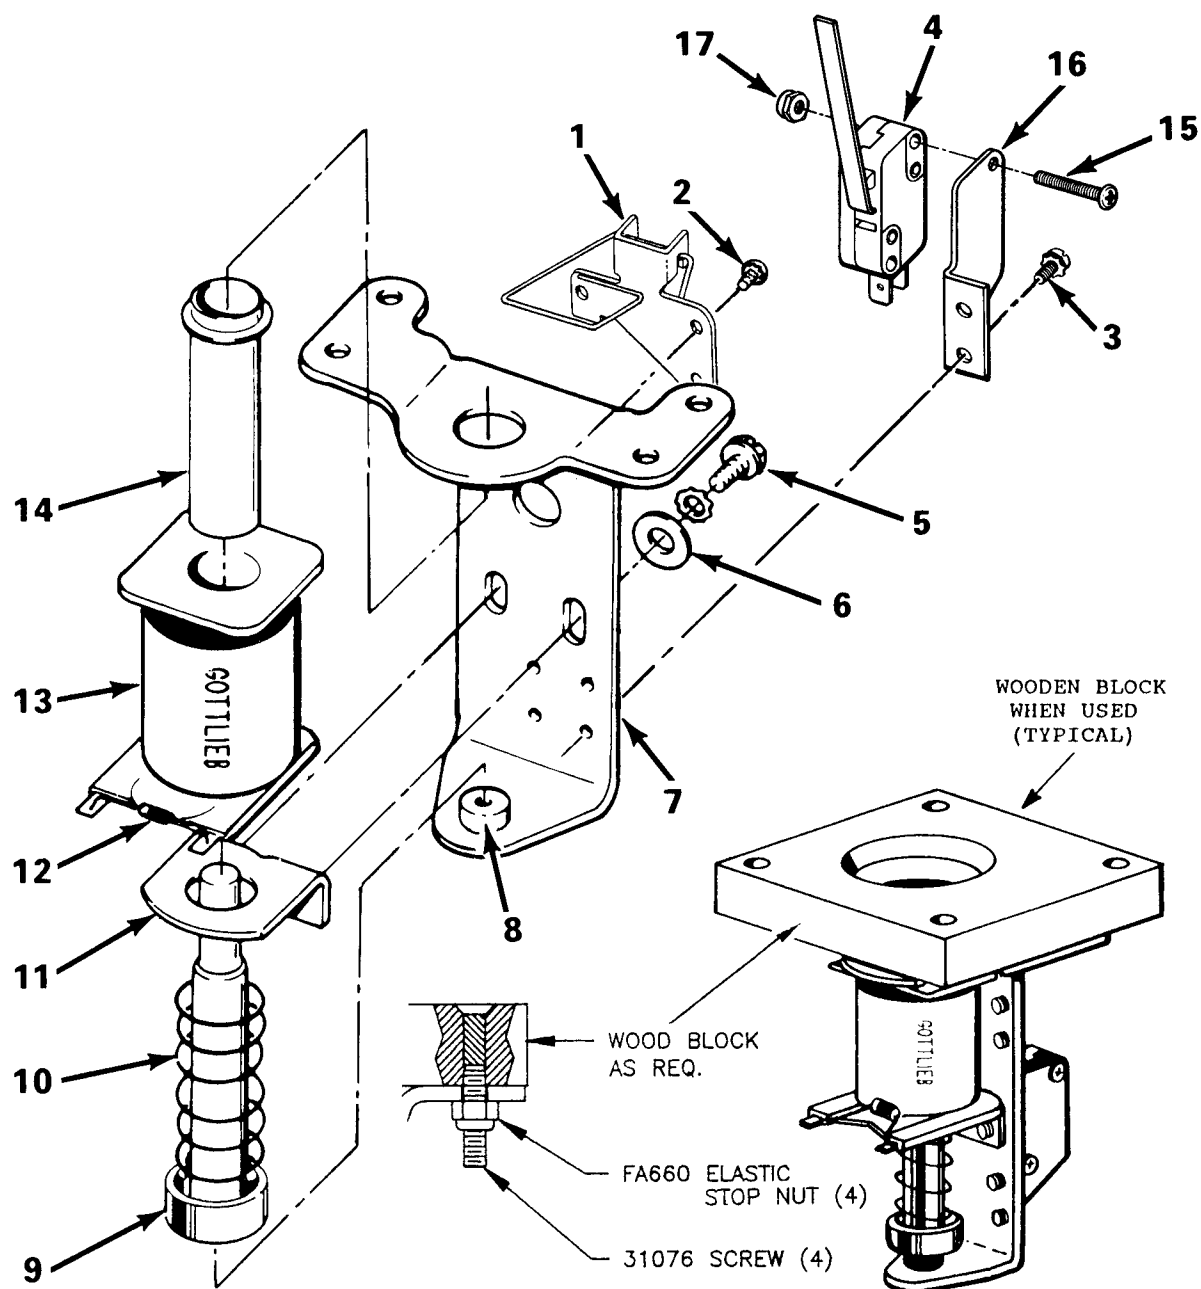


ITEM	DESCRIPTION	PART NO.
	UPKICKER ASSEMBLIES WITH ASSOCIATED COILS	MA-1743, 16570 COIL MA-1747, 26450 COIL MA-1789, 17876 COIL
1	WIREFORM AND BRACKET	28953
2	RHMS-SEMS 6-32 X 3/16" (3)	FA-30
3	RHMS 5-40 X 1/4" SEMS (2)	FA-10
4	MICROSWITCH WITH ACTUATOR	27667A
5	HHMS-SEMS 8-32 X 5/16" (2)	FA-67
6	#8 WASHER (2)	FA-617
7	FRAME	21416
8	RUBBER GROMMET	5240
9	PLUNGER AND TIP ASSEMBLY	21412
10	SPRING	26739
11	COIL MOUNTING BRACKET	15409
12	DIODE, 1N4004	XO-254
13	COIL	(SEE SCHEMATIC)
14	SLIP-IN-CORE	21411
15	PAN HEAD 4-40 X 5/8" (2)	FA-107
16	MICROSWITCH MOUNTING BRACKET	27870
17	ELASTIC STOP NUT, 4-40 (2)	FA-648

VII. PARTS INFORMATION

POP BUMPER PARTS

PAT. NO. 213,981

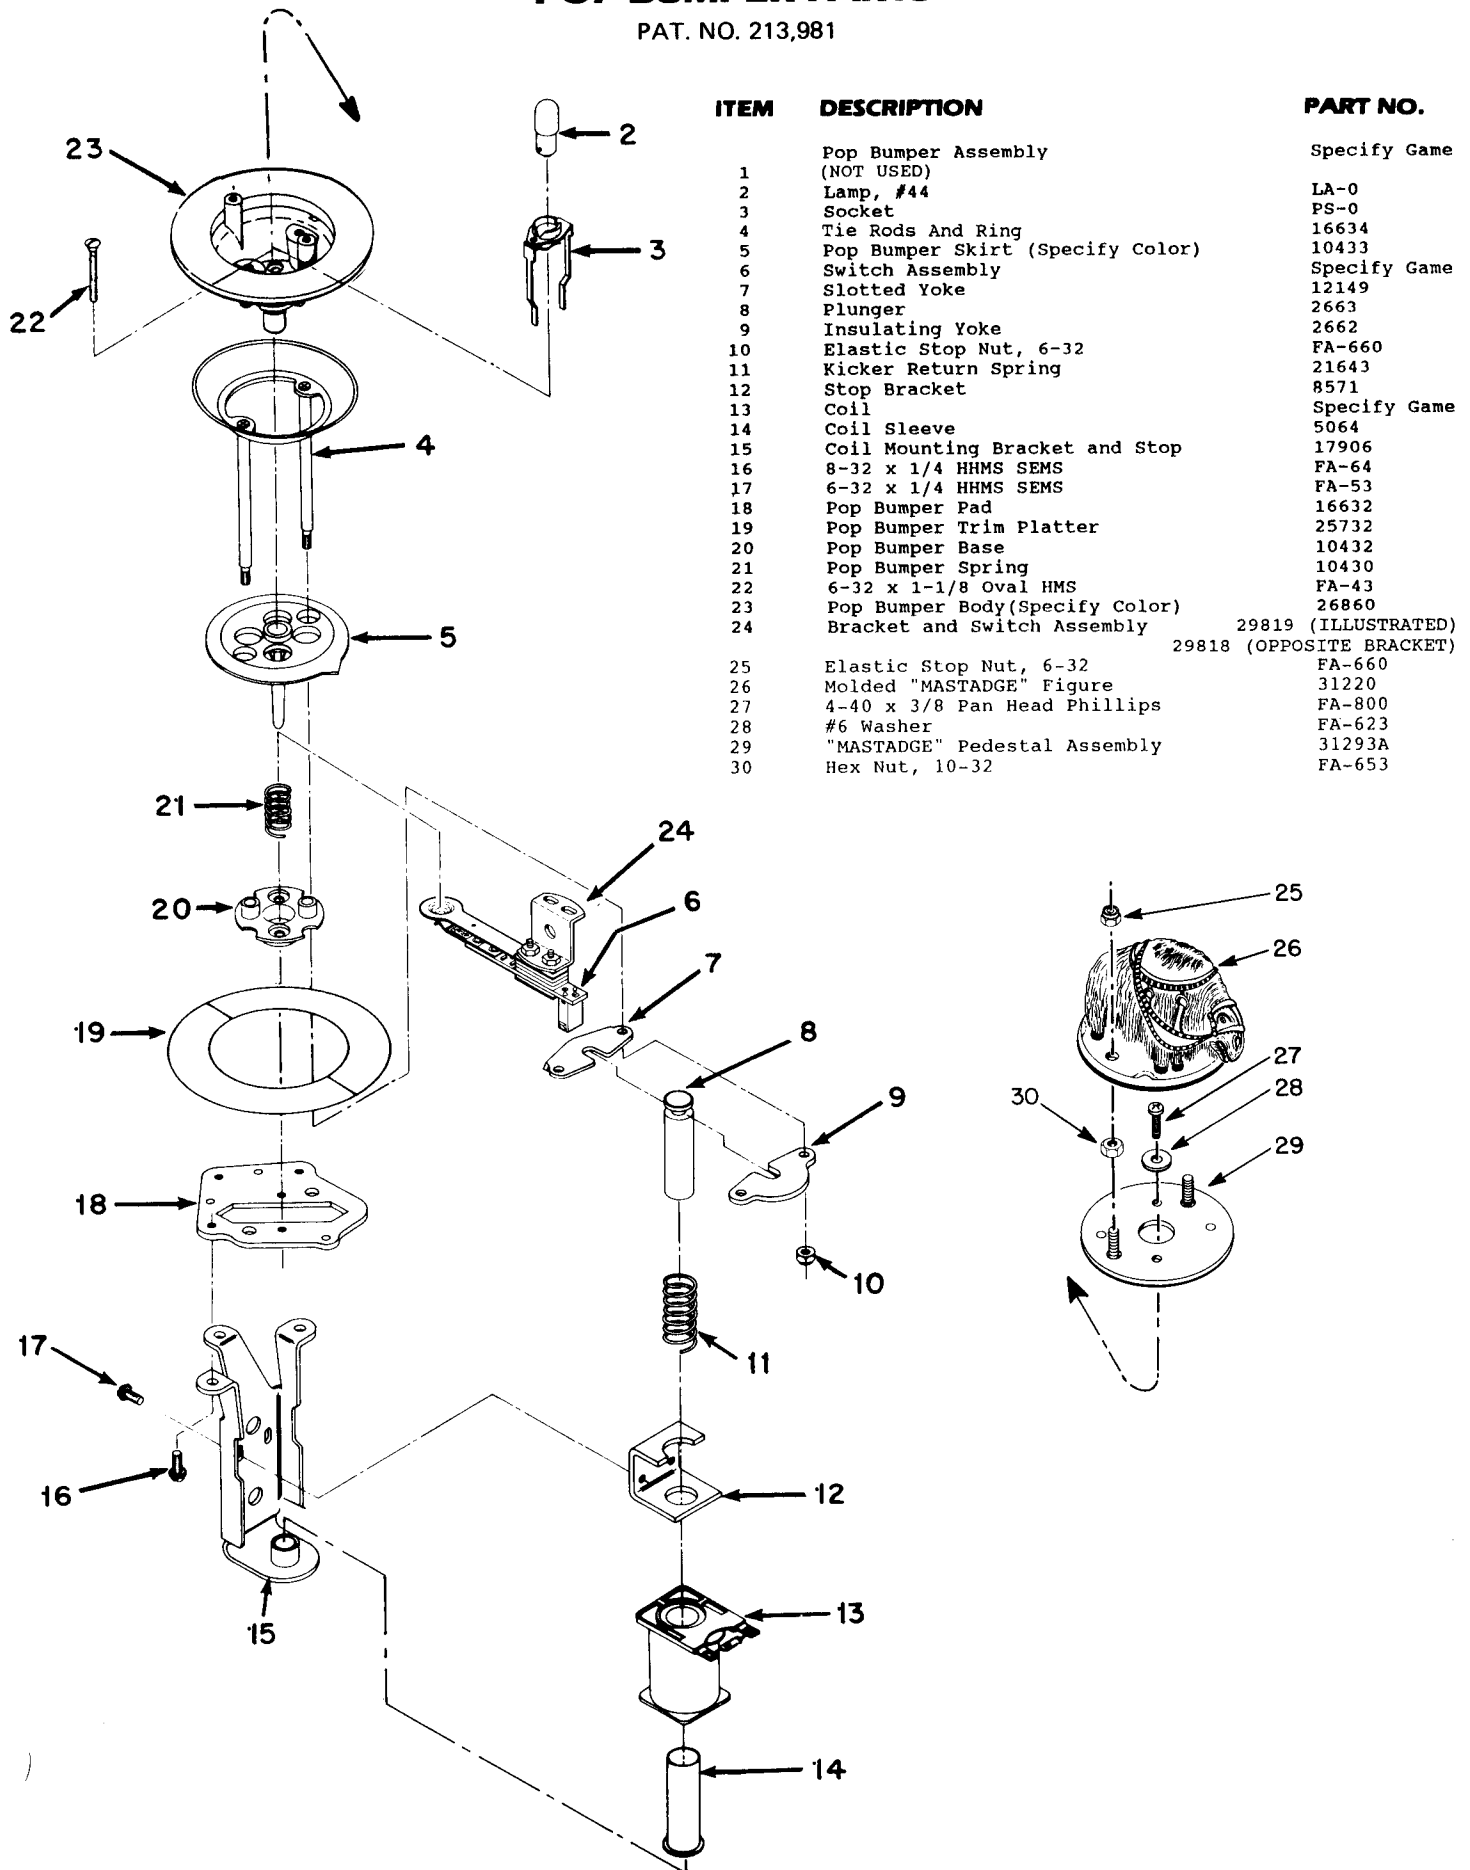


VII. PARTS INFORMATION

DROP TARGET PARTS


Patent Number: 4,804,186

DROP TARGETS	WITHOUT TRIP COIL			WITH TRIP COIL		
	ITEM 14 COIL PLATE	ITEM 18 GUIDE PLATE	ITEM 22 RESET ARM	ITEM 30 SWITCH PLATE	ITEM 48 COIL PLATE	ITEM 51 GUIDE PLATE
1	25618-1	25621-1	25615-2	25617-1	25619-1	25623-1
2	25618-2	25621-2	25615-2	25617-2	25619-1	25623-1
3	25618-3	25621-3	25615-2	25617-3	25619-2	25623-2
4	25618-4	25621-4	25615-3	25617-4	25619-3	25623-3
5	25618-5	25621-5	25615-4	25617-5	25619-4	25623-4
6	25618-6	25621-6	25615-5	25617-6	25619-5	25623-5
7	25618-7	25621-7	25615-6	25617-7	25619-6	25623-6
8	25618-8	25621-8	25615-7	25617-8	25619-7	25623-7
8	25618-8	25621-8	25615-8	25617-8	25619-8	25623-8

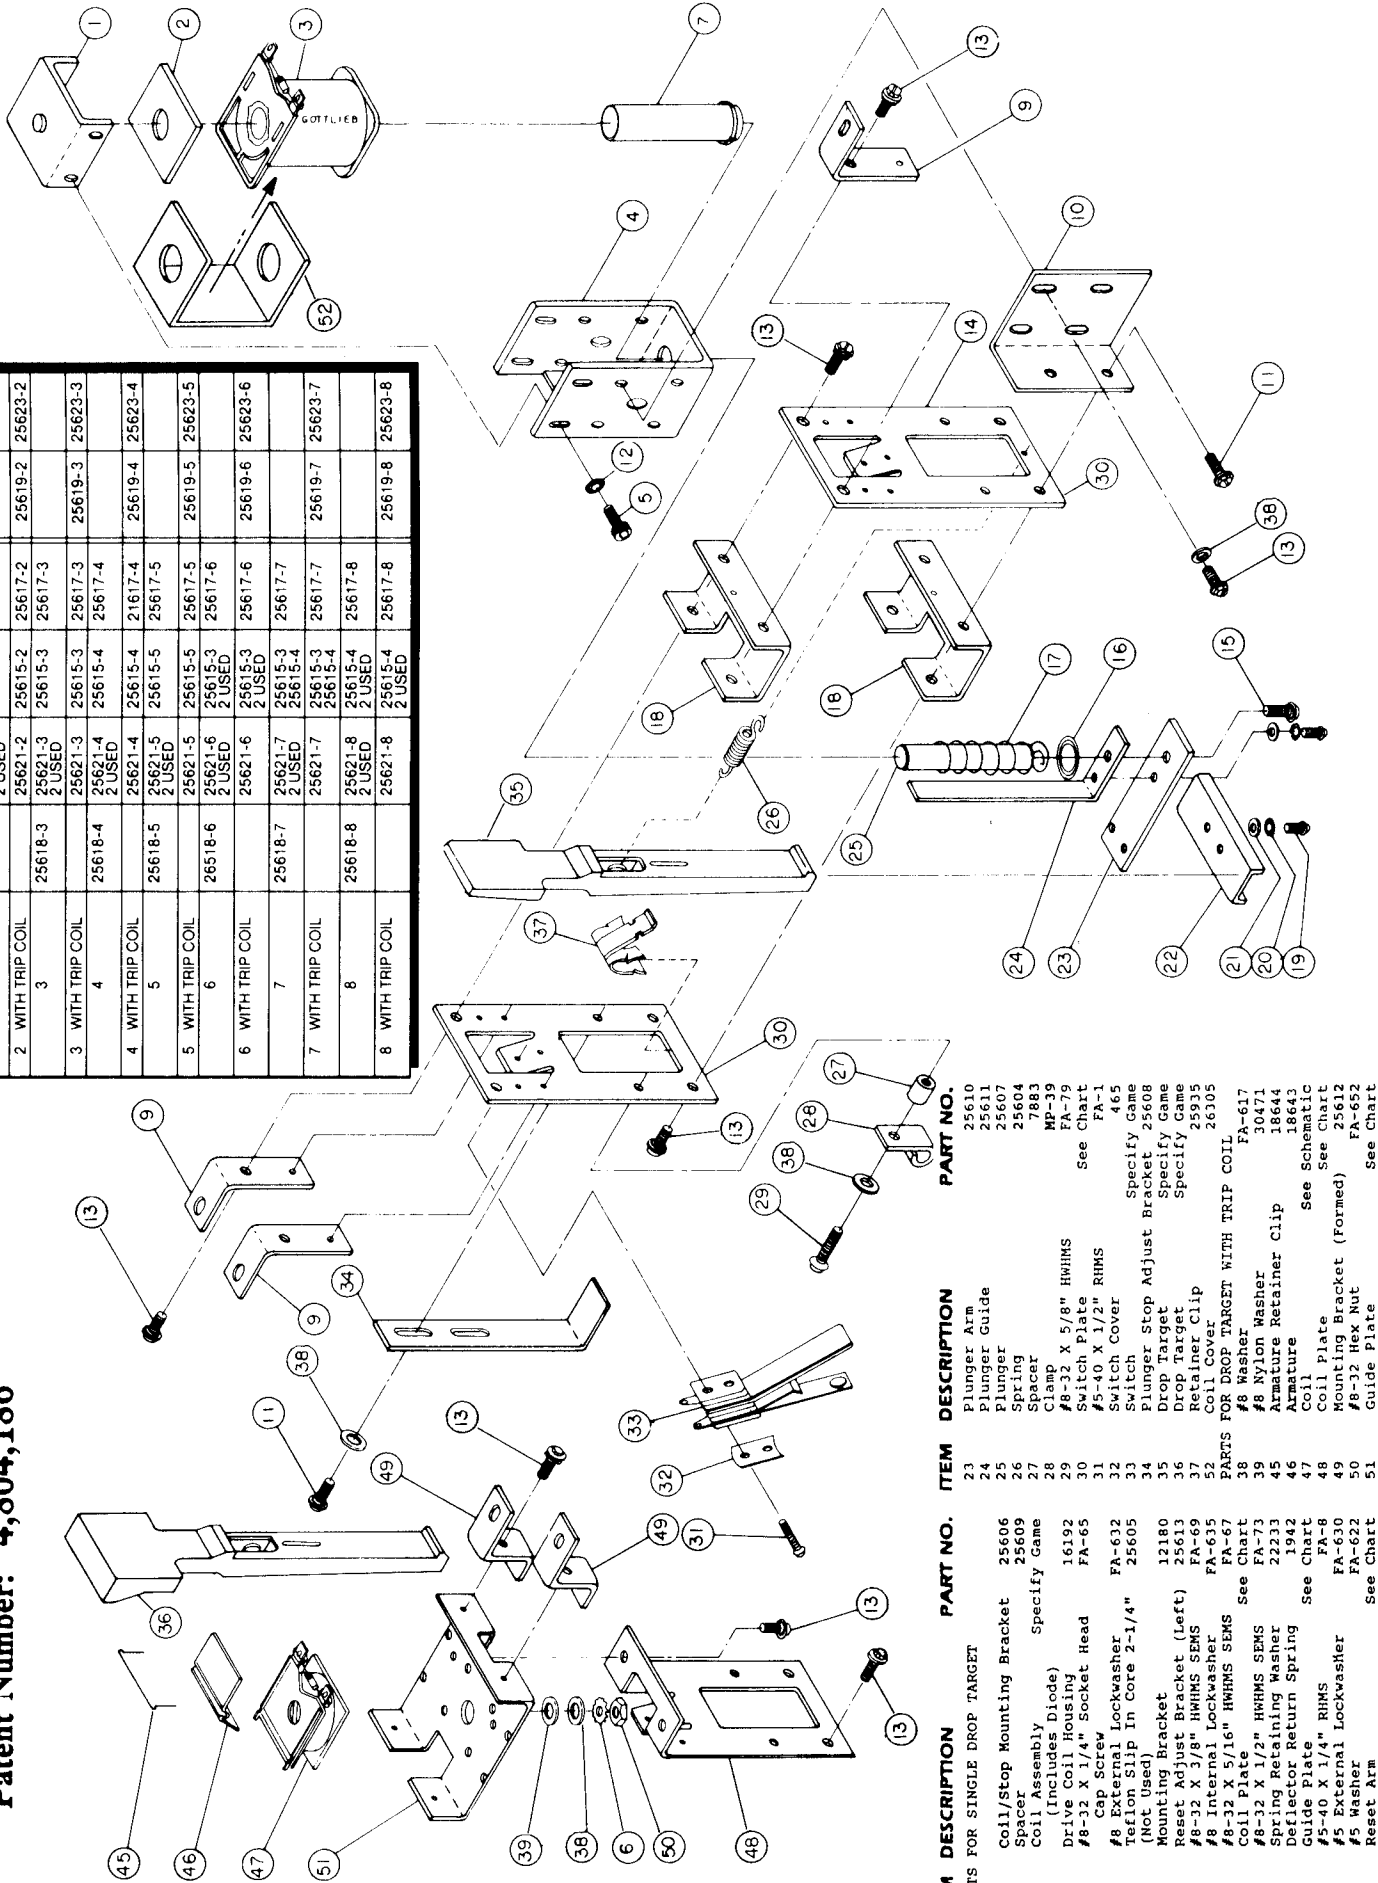

VII. PARTS INFORMATION

DROP TARGET PARTS

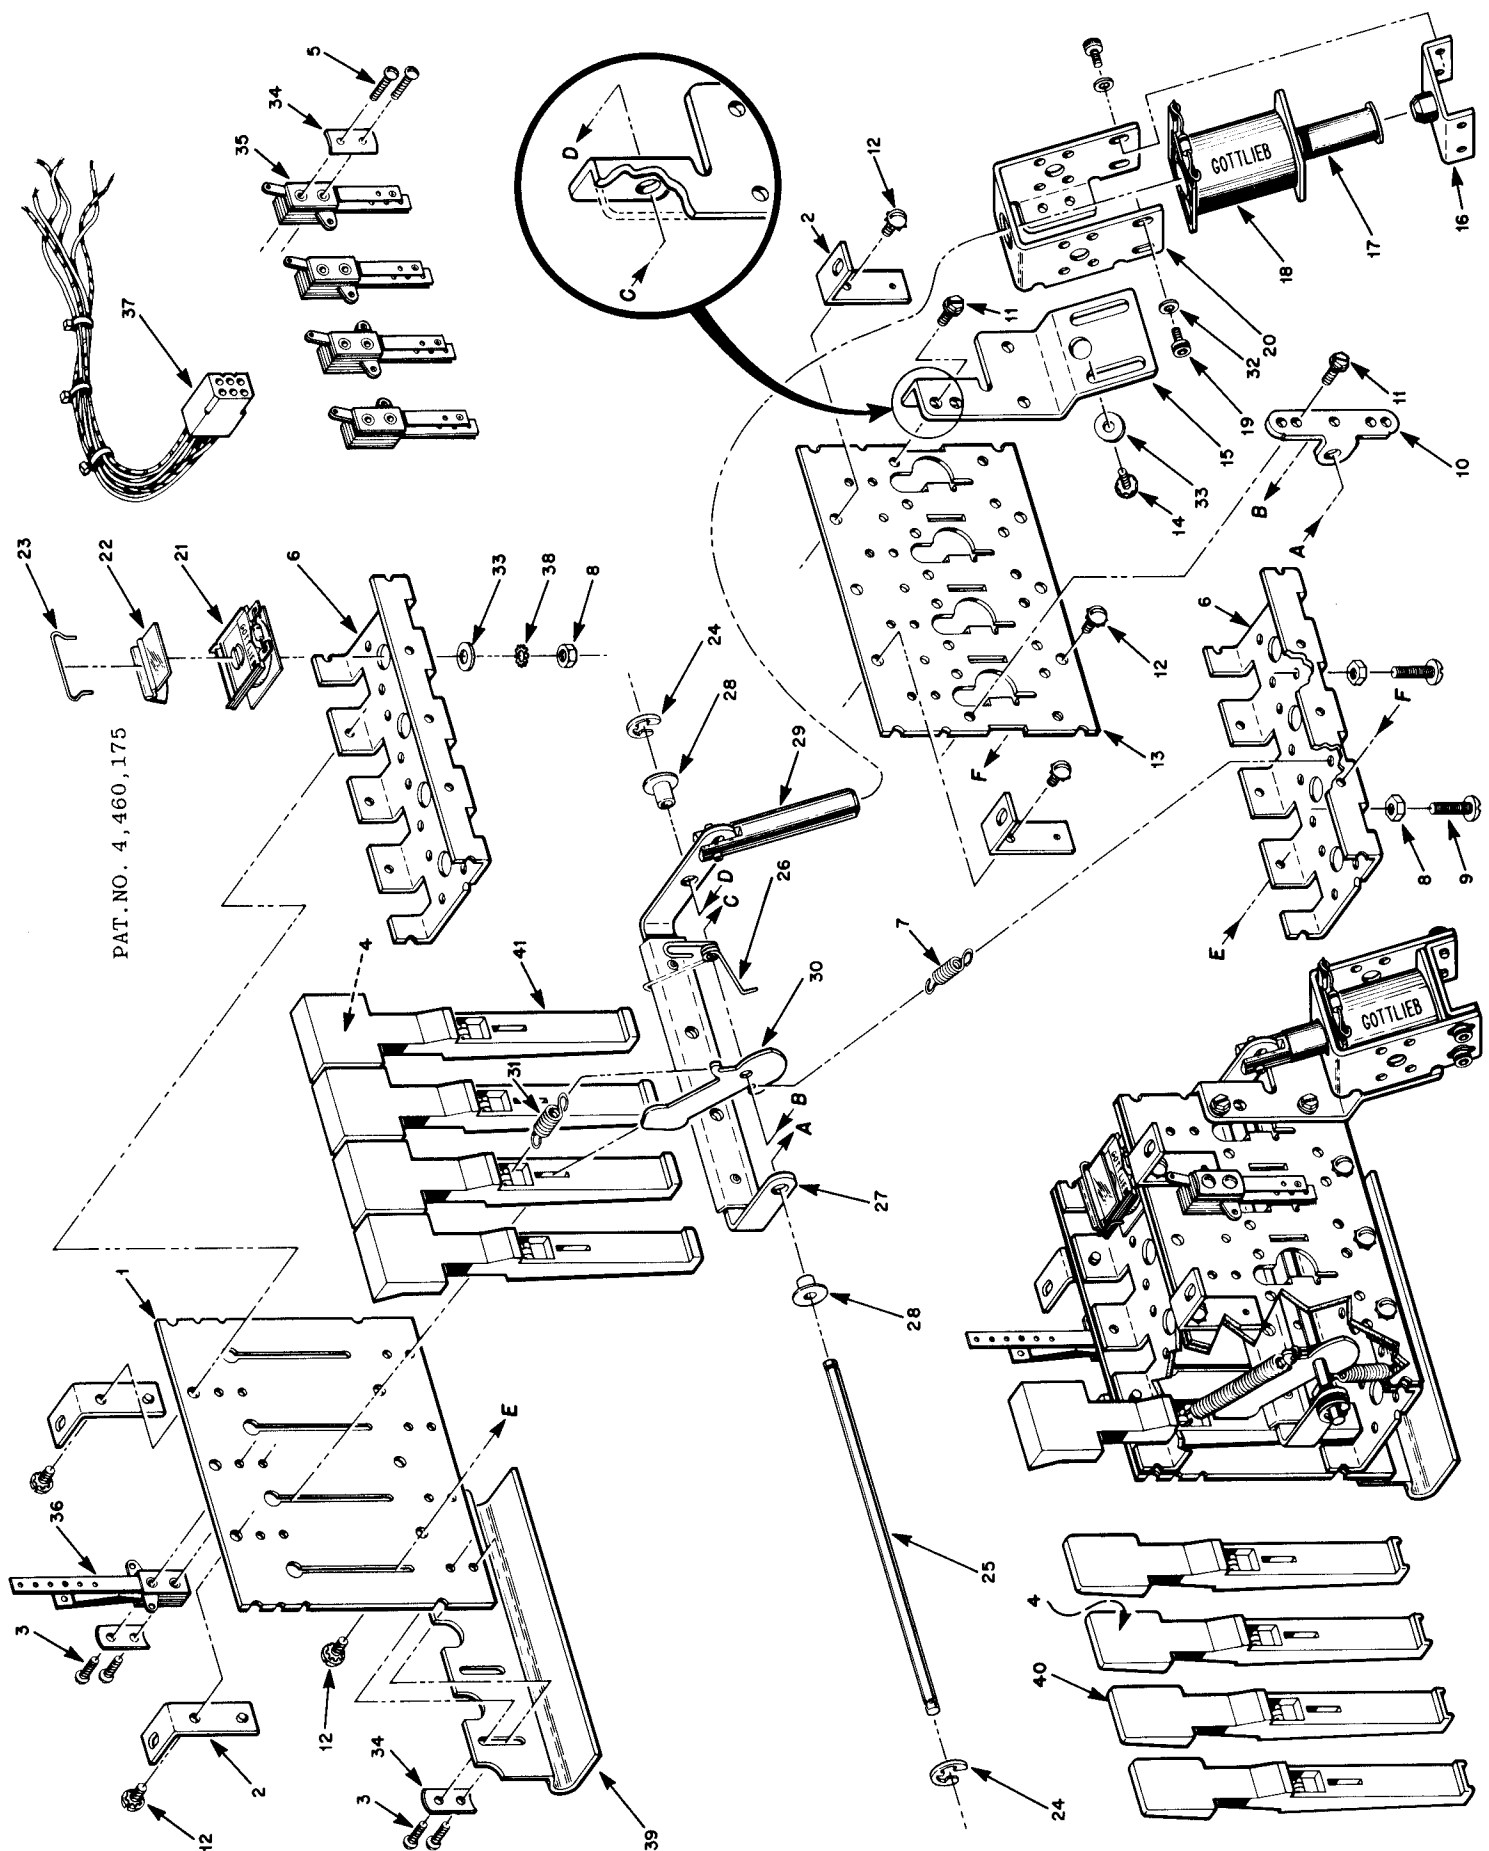

VII. PARTS INFORMATION


DROP TARGET PARTS

ITEM	DESCRIPTION	PART NO.
1	Switch Plate	Refer to Chart
2	Mounting Plate	12180
3	RHMS, #5-40 x 3/4	FA-3
4	Decals	Specify Game
5	RHMS, #5-40 x 5/8	FA-2
6	Guide Plate	Refer to Chart
7	Spring	517
8	Hex Nut, #8-32	FA-652
9	RHMS, #8-32 x 5/8	FA-75
10	Outboard Bearing Bracket	15696
11	HWHSMS, #8-32 x 3/8	FA-69
12	RHMS, #8-32 x 1/4	FA-62
13	Pivot Plate	Refer to Chart
14	HWHSMS, #8-32 x 5/16	FA-67
15	Coil Setup Bracket	15505 (Shown) 15504 (Opposite)
16	Coil Mount Bracket	17958
17	Plastic Slip in Core 2 1/2"	5172
18	Coil	Specify Game
19	Socket Head, #8-32 x 1/4	FA-65
20	Coil Housing	16194
21	Coil	19217
22	Armature	18643
23	Clip	18644
24	Retaining Ring	FA-681
25	Shaft	Refer to Chart
26	Reset Arm Return Spring	13455
27	Reset Arm	Refer to Chart
28	Reset Arm Bearing	15687
29	Drive Coil Plunger	262
30	Trigger	12181
31	Spring	18995
32	Internal Lockwasher, #8	FA-635
33	Washer, #8	FA-617
34	Switch Cover	465
35	Switch(s)	Specify Game
36	Switch(s), (10 Point)	18096
37	Cable Assembly	Specify Game
38	External Lockwasher, #8	FA-632
39	Stop Bracket	20937
40	Drop Target	Specify Game
41	Rollover Target	Specify Game

DROP TARGETS	ITEM 1	ITEM 6	ITEM 13	ITEM 25	ITEM 27
	SWITCH PLATE	GUIDE PLATE	PIVOT PLATE	SHAFT	RESET ARM
3	20936	20934	20935	20938	20941
4	13411	13413	13409	13402	15689
5	13412	13414	13410	13403	15691
5 (TRIP ARM)	13412	13414	13410	15878	15691
6	17938	17937	17939	17932	17936
7	14531	14532	14530	14527	15693
9	15621	15622	15620	15617	15619
9 (TRIP ARM)	15621	15622	15620	16406	15619
10	12187	12188	12186	12179	15503

VII. PARTS INFORMATION


TARGET ASSEMBLY

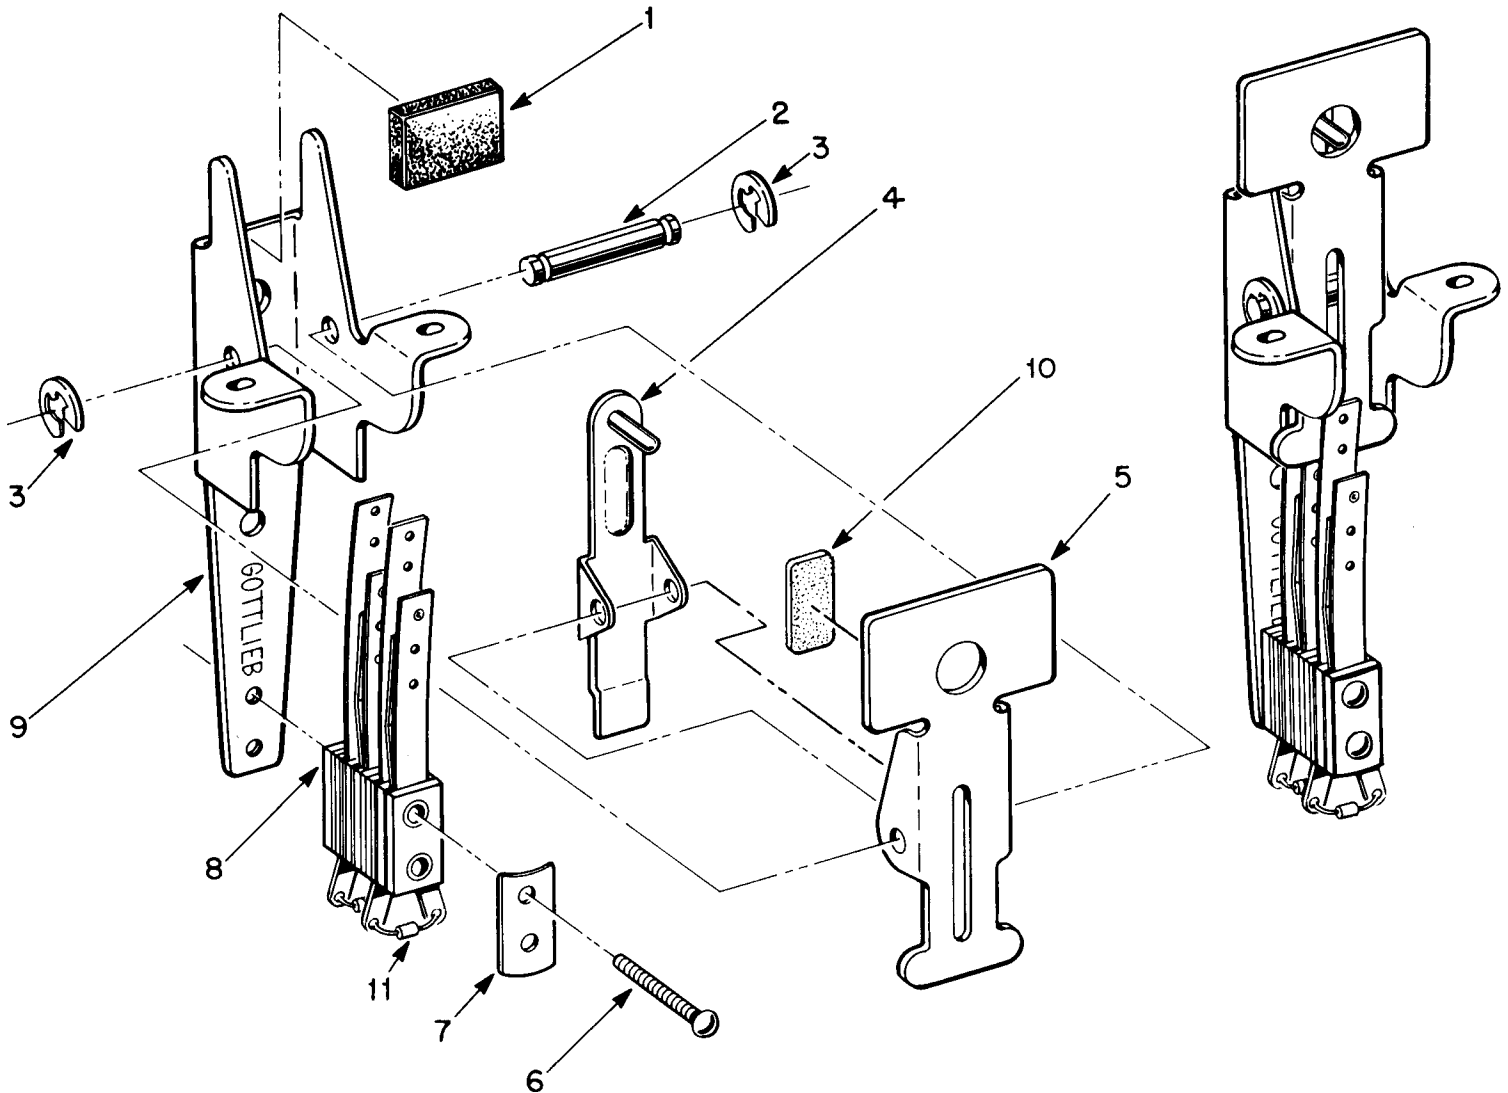

ITEM	DESCRIPTION	PART NO.
1	TARGET ASSEMBLY	29714
2	RUBBER STRIP	24290B
3	TARGET SHAFT	20211
3	E-RING (2)	FA-682
4	TARGET ARM SUB-ASSEMBLY	27443
5	TARGET ARM	27444
6	SCREW, #5-40X 1" RHMS, (2)	FA-4
7	SWITCH COVER	465
8	SWITCH ASSEMBLY	27544
9	TARGET HOUSING	29712
10	URETHANE BUMPER (2)	29758
11	CAPACITOR, 0.1UF, +80-20%, 50V, (2)	XO-230
	DECAL (NOT SHOWN)	31248


VII. PARTS INFORMATION

KICKING TARGET ASSEMBLY

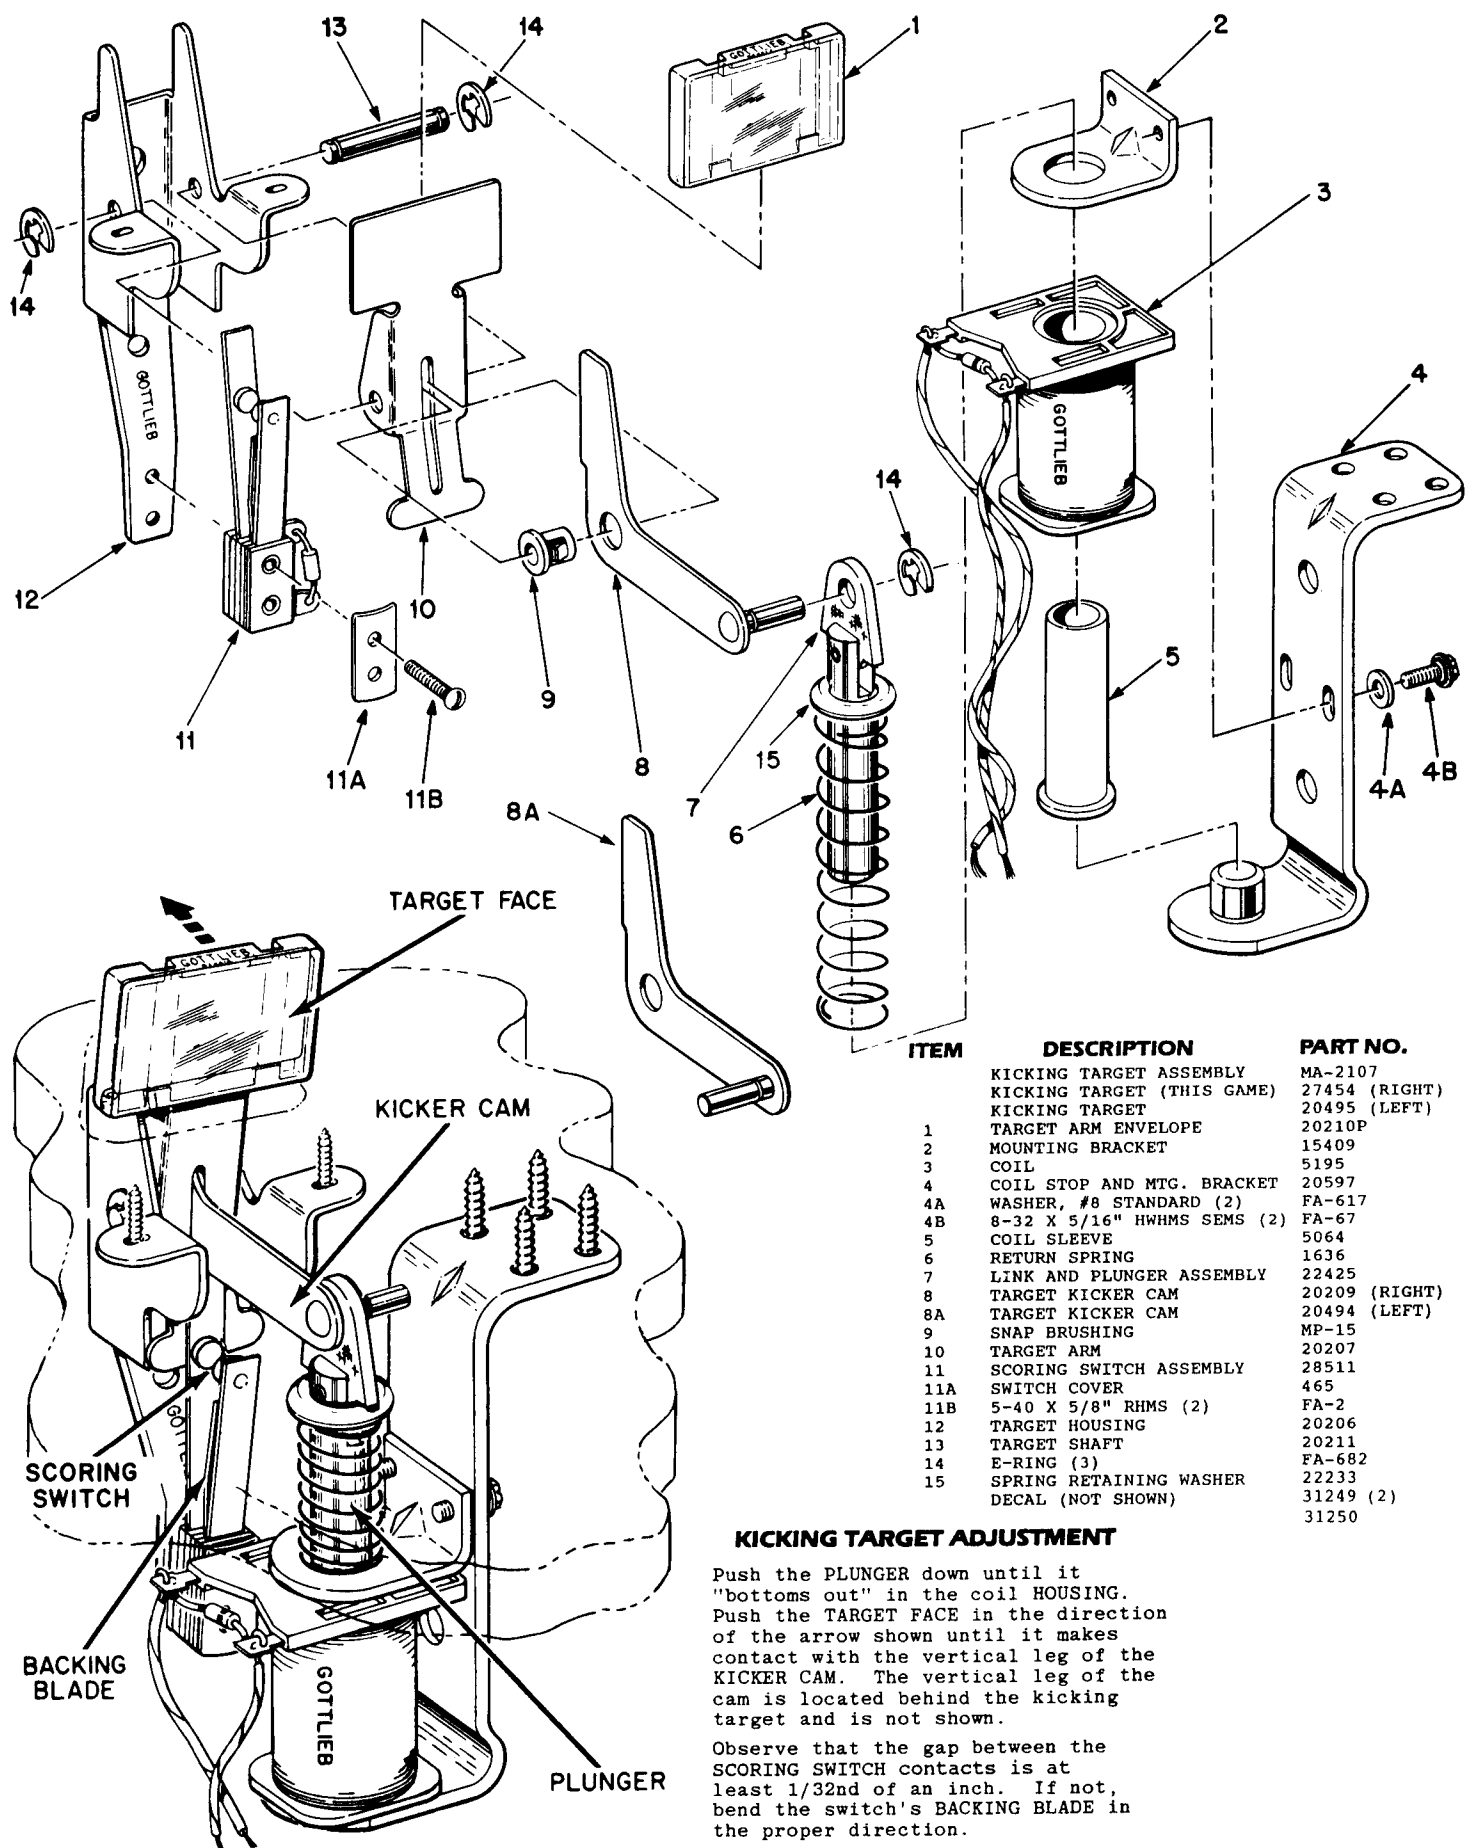

VII. PARTS INFORMATION


SPACESHIP AND BRACKET ASSEMBLY 31108, MOTOR AND SUPPORT ASSEMBLY 31122, PYRAMID AND MECHANICAL ASSEMBLY 31239

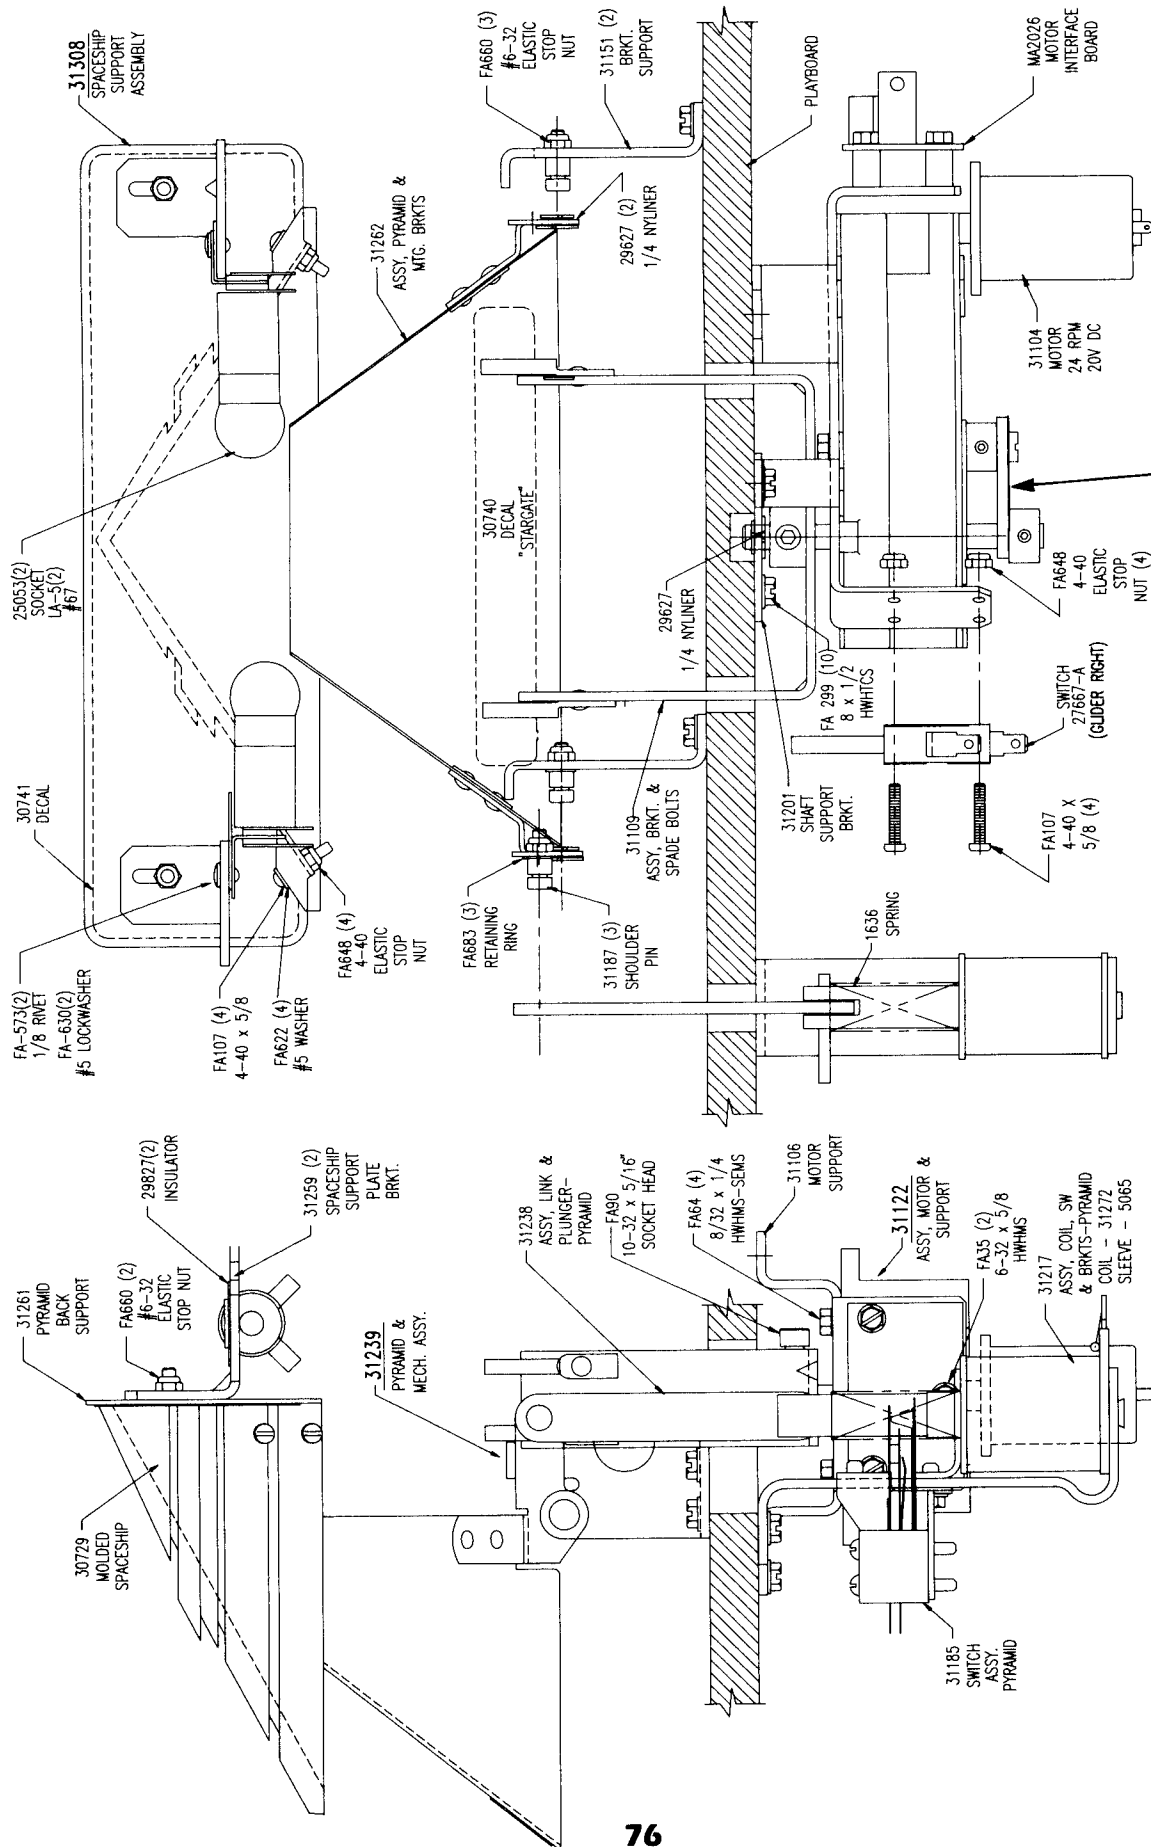

NOTE:
FOR SERVICE REPLACEMENT
OF BAKELITE LINK, USE
PART NO. 31367.


VII. PARTS INFORMATION

MOTOR AND SUPPORT ASSEMBLY 31121

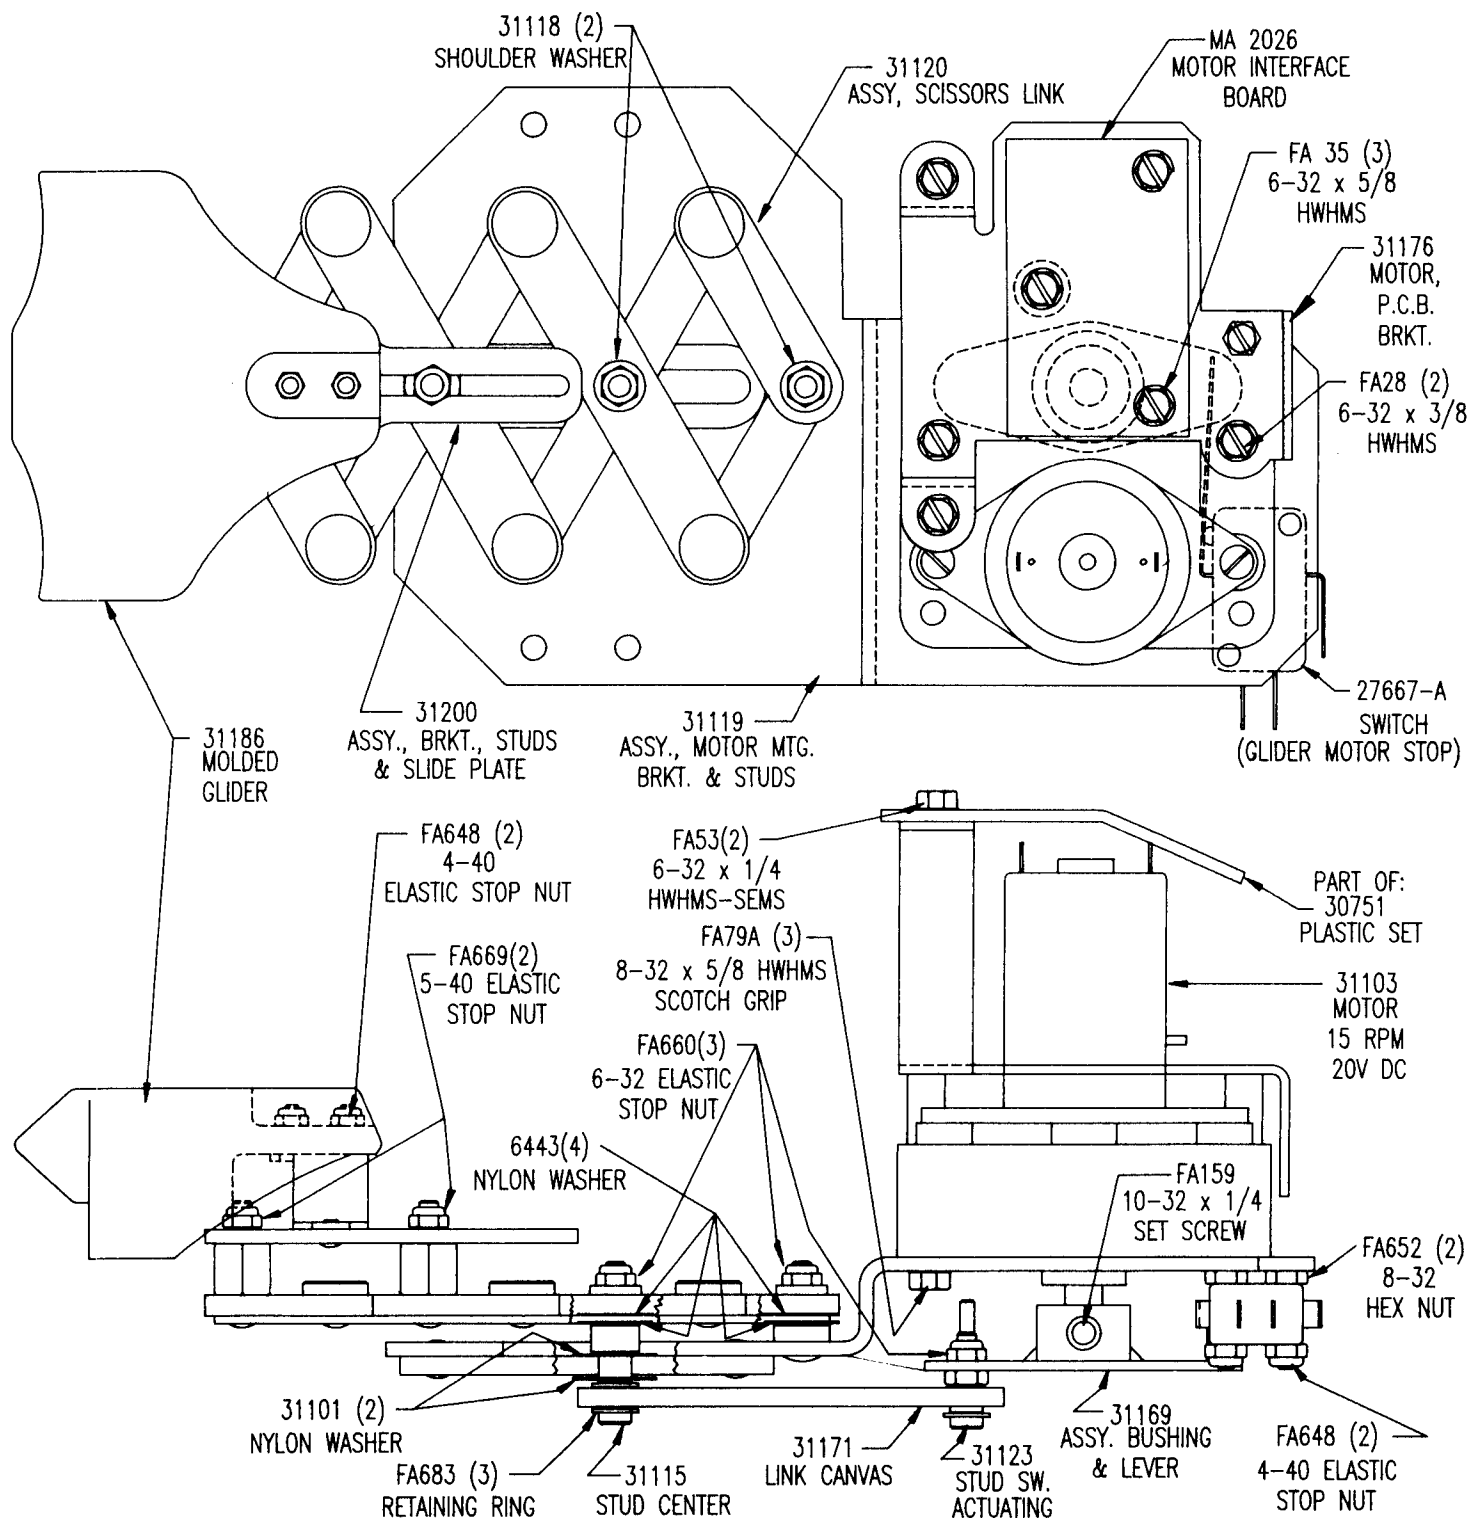


VII. PARTS INFORMATION

PIVOT UNIT AND TARGET ASSEMBLY 30728

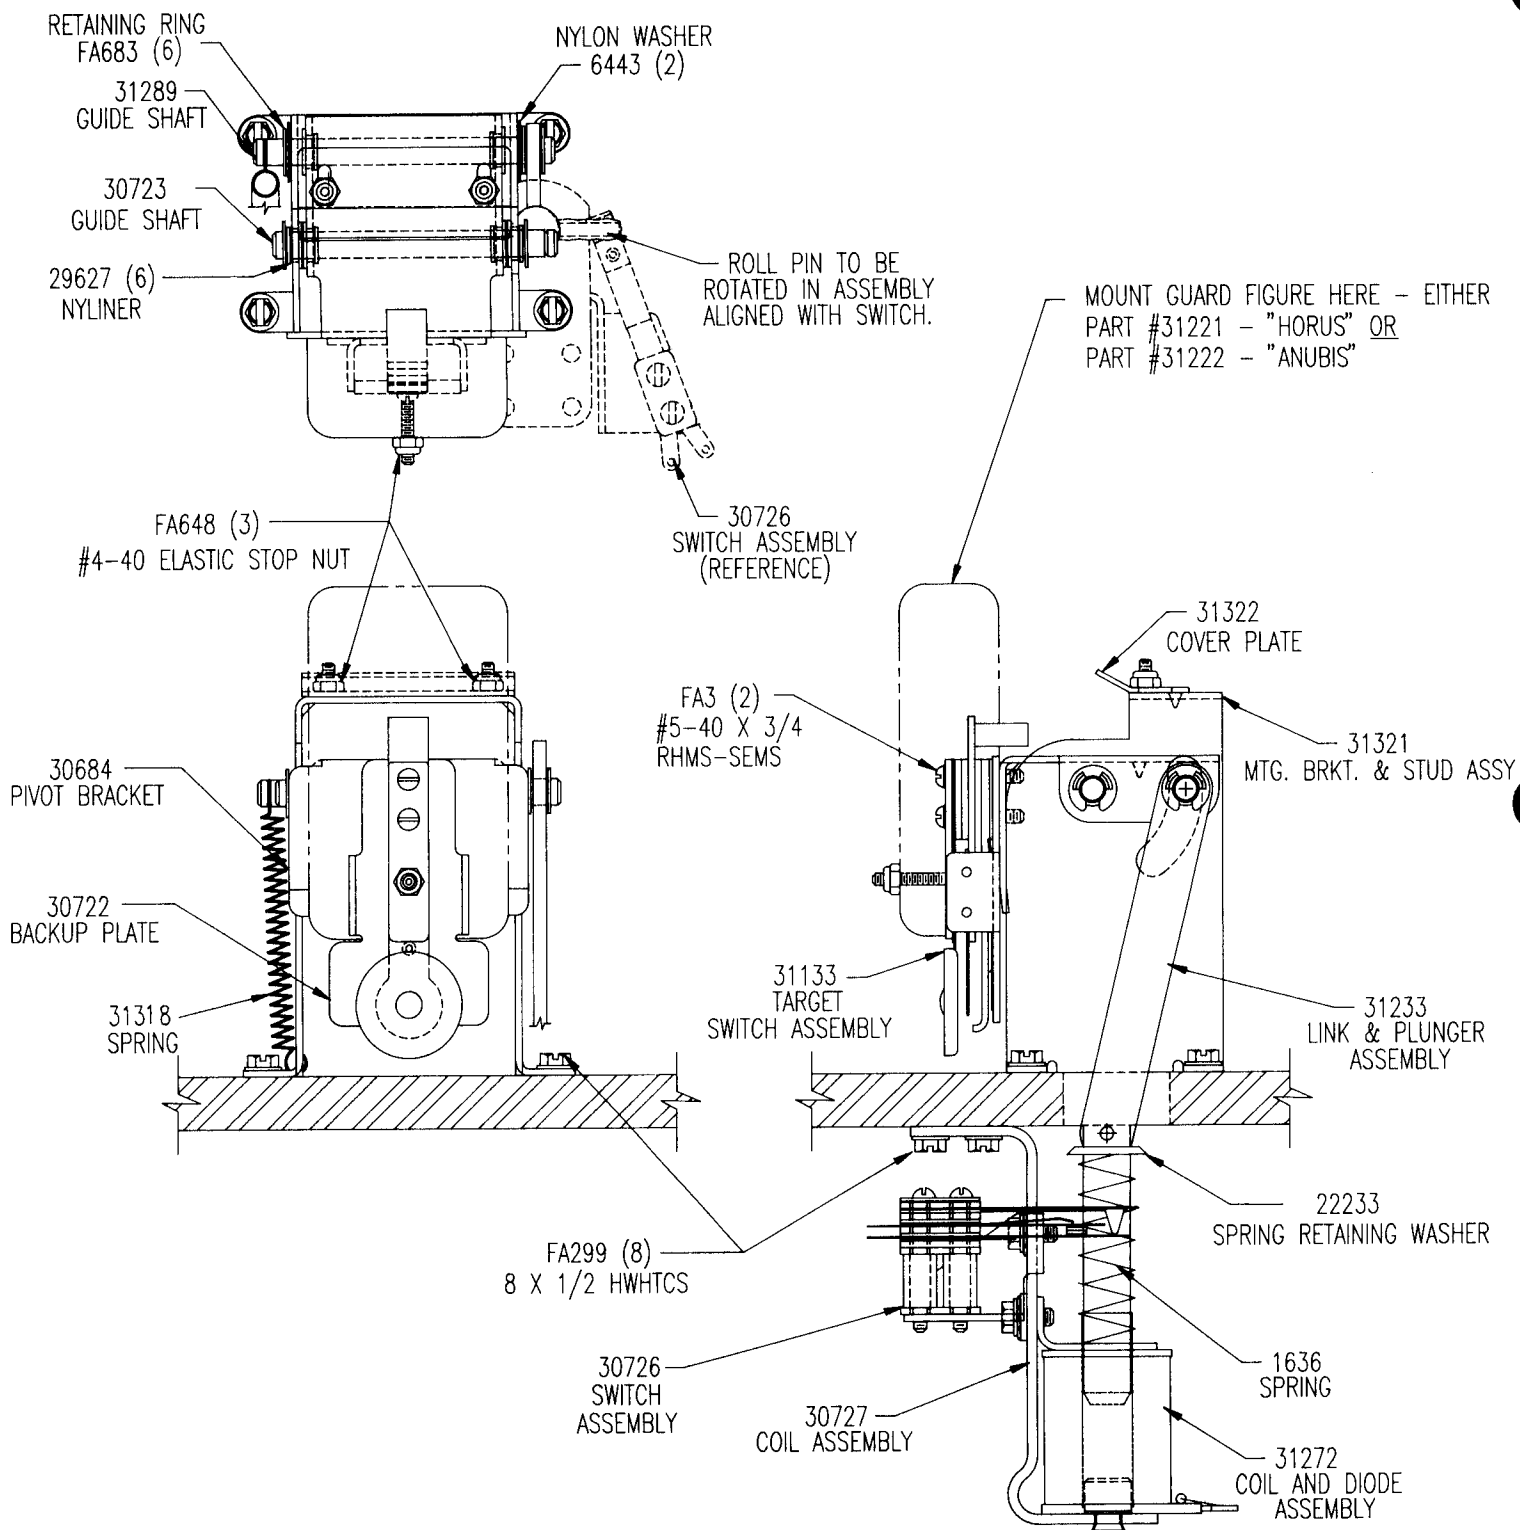


VII. PARTS INFORMATION

PIVOT POST MECHANISM ASSEMBLY 31287

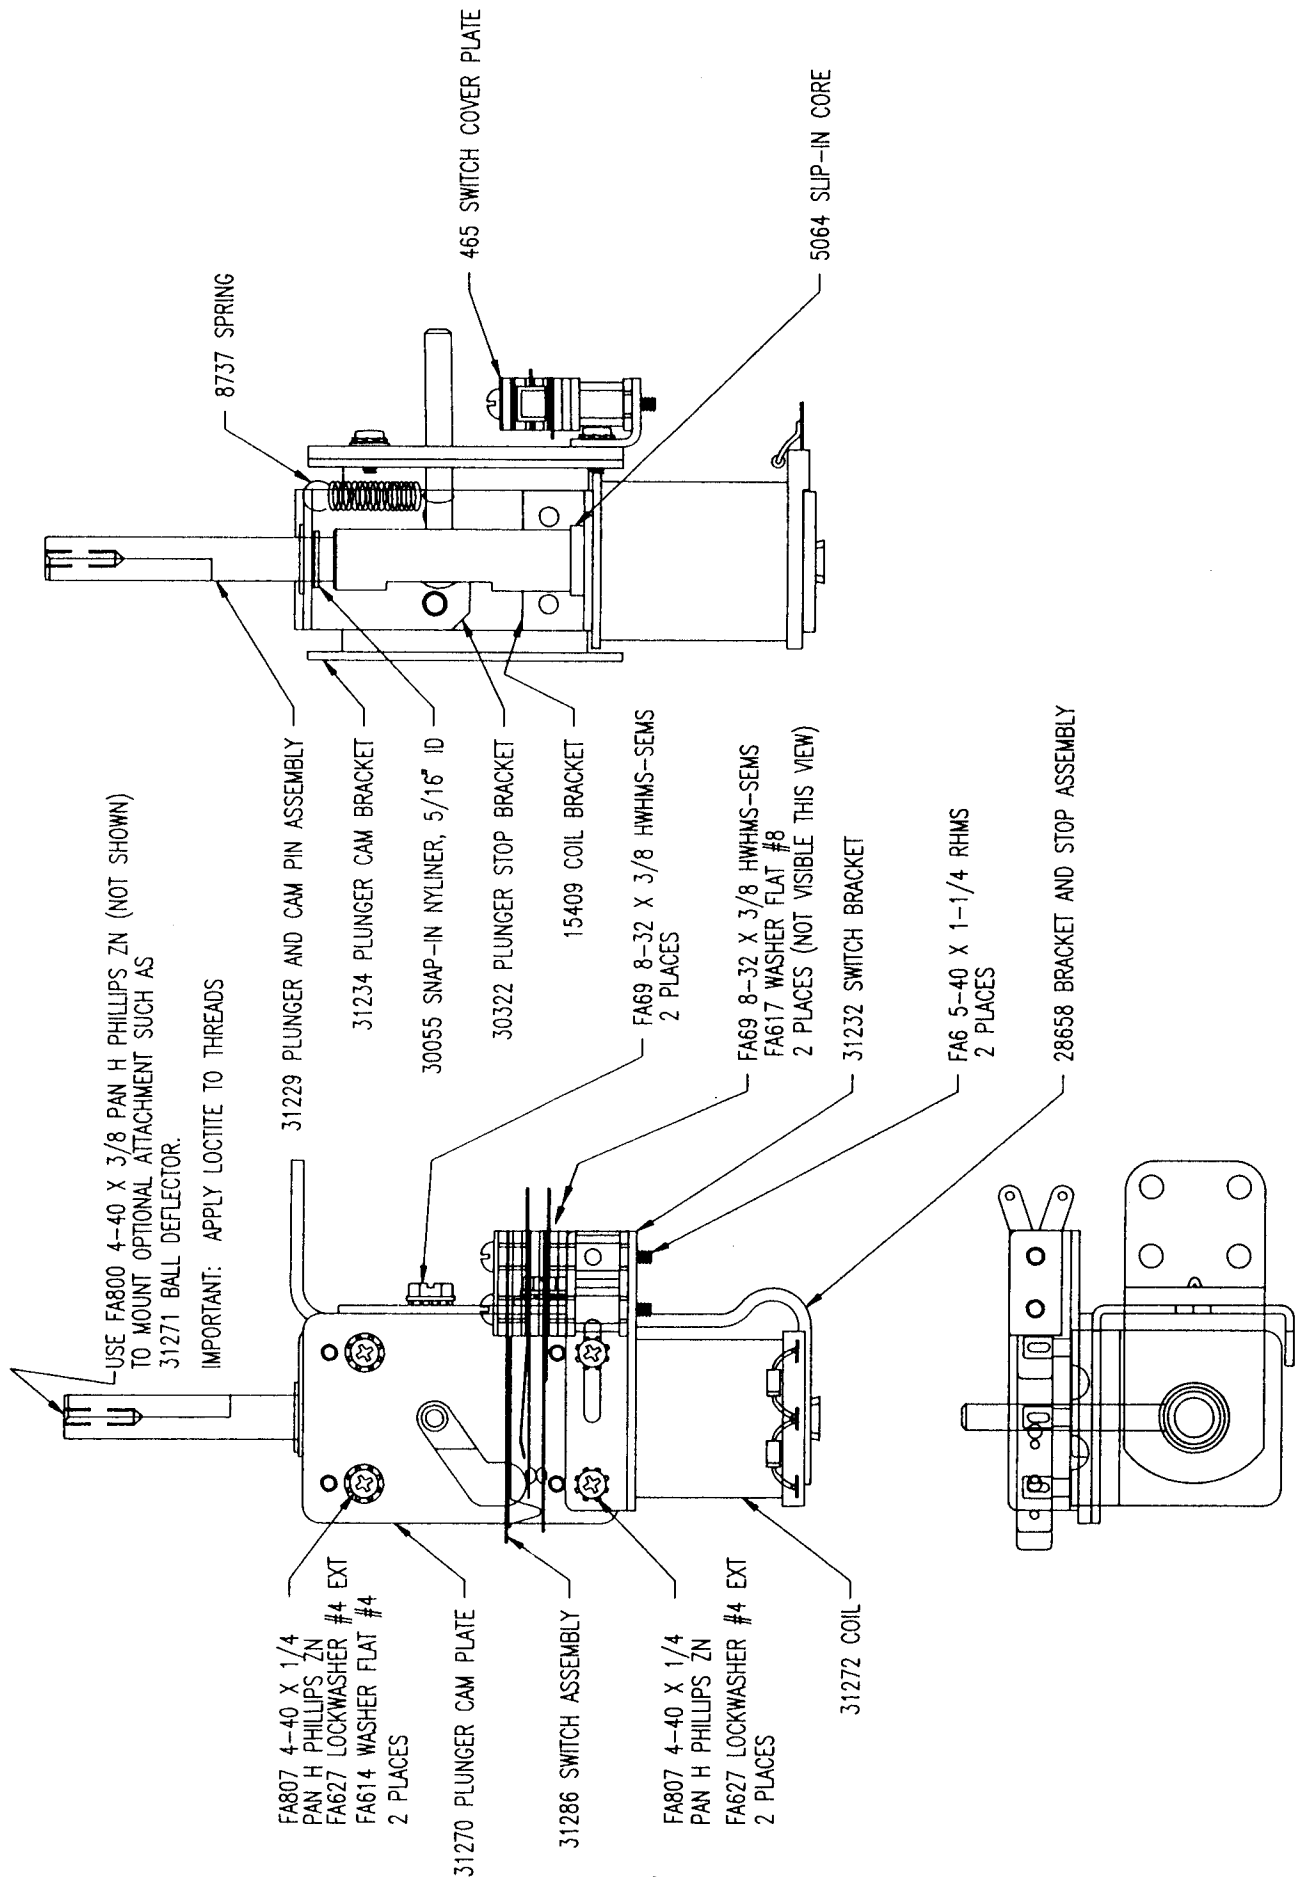


VII. PARTS INFORMATION

LIGHTBOX INSERT ASSEMBLY MA-2038

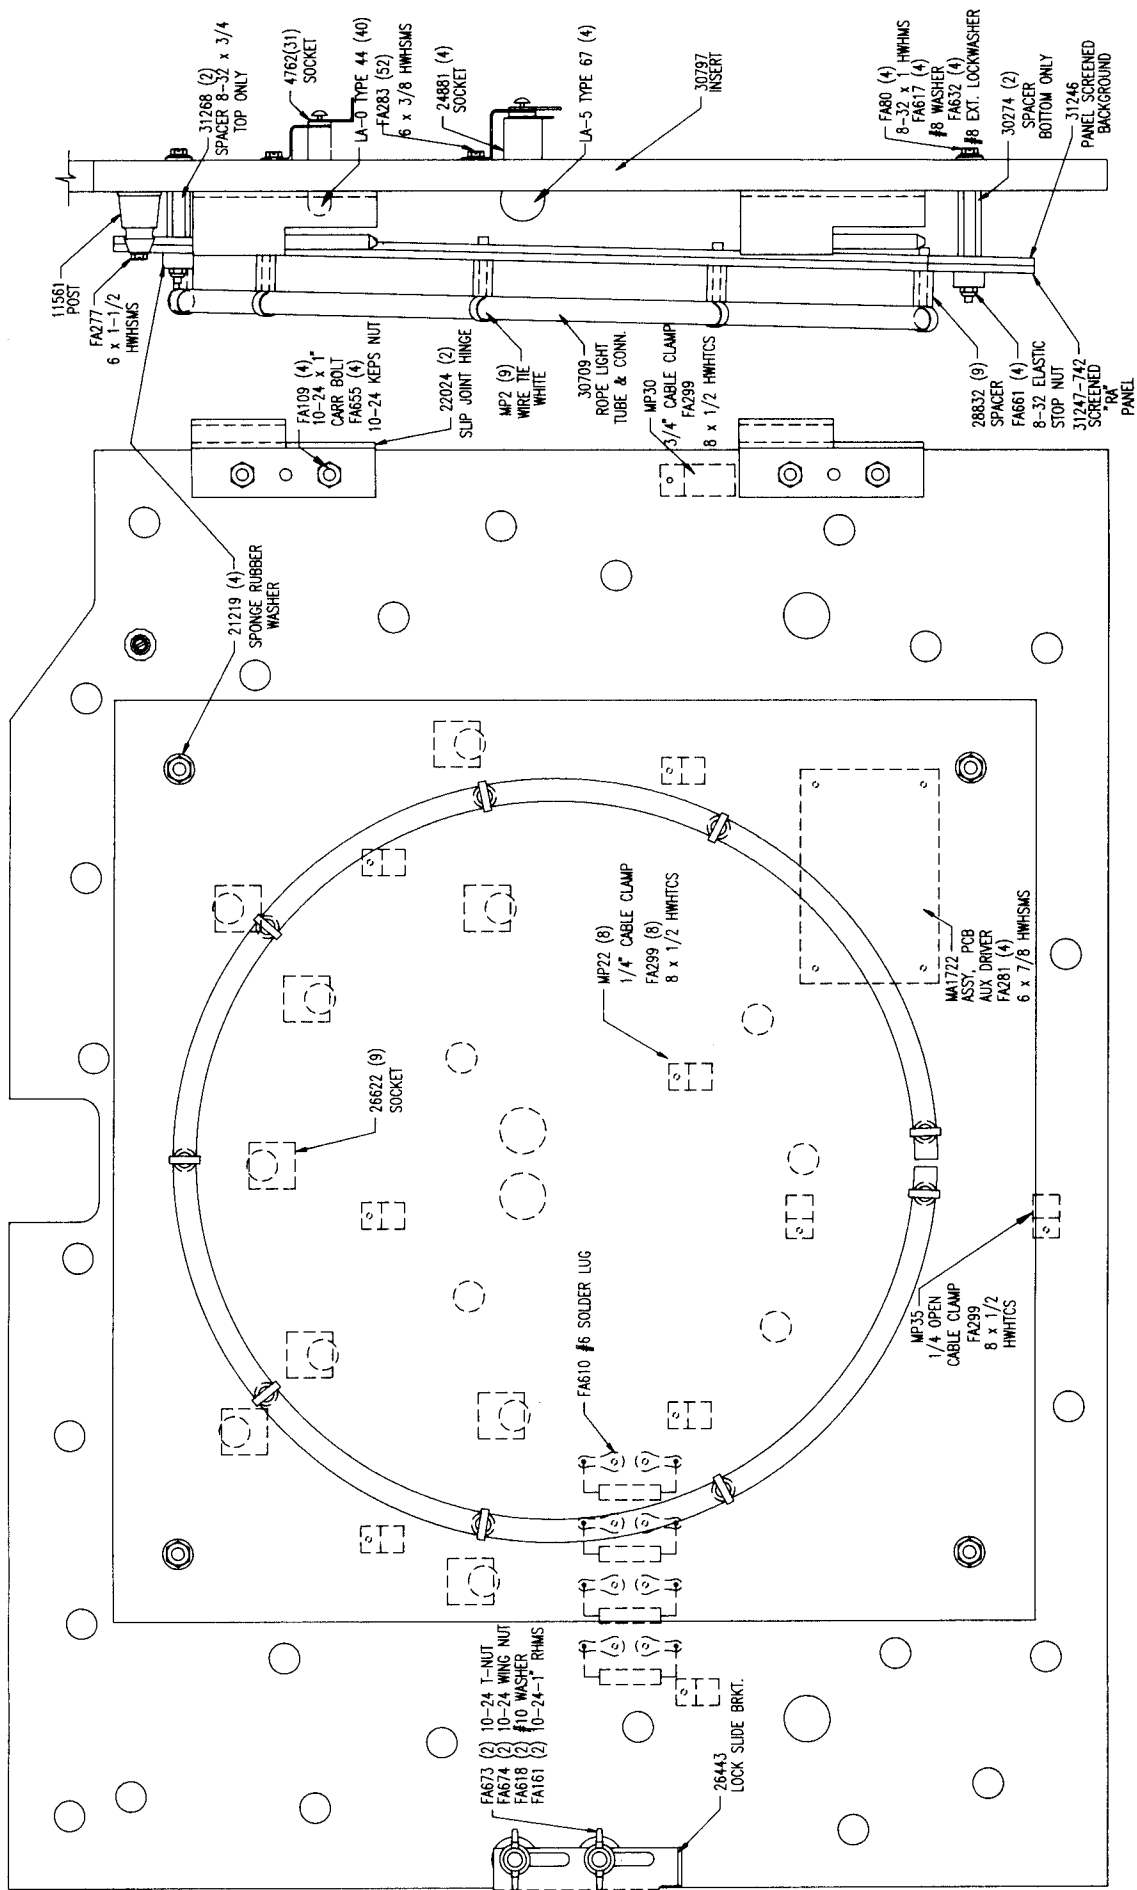

VII. PARTS INFORMATION

LIGHTBOX INSERT LAMP IDENTIFICATION

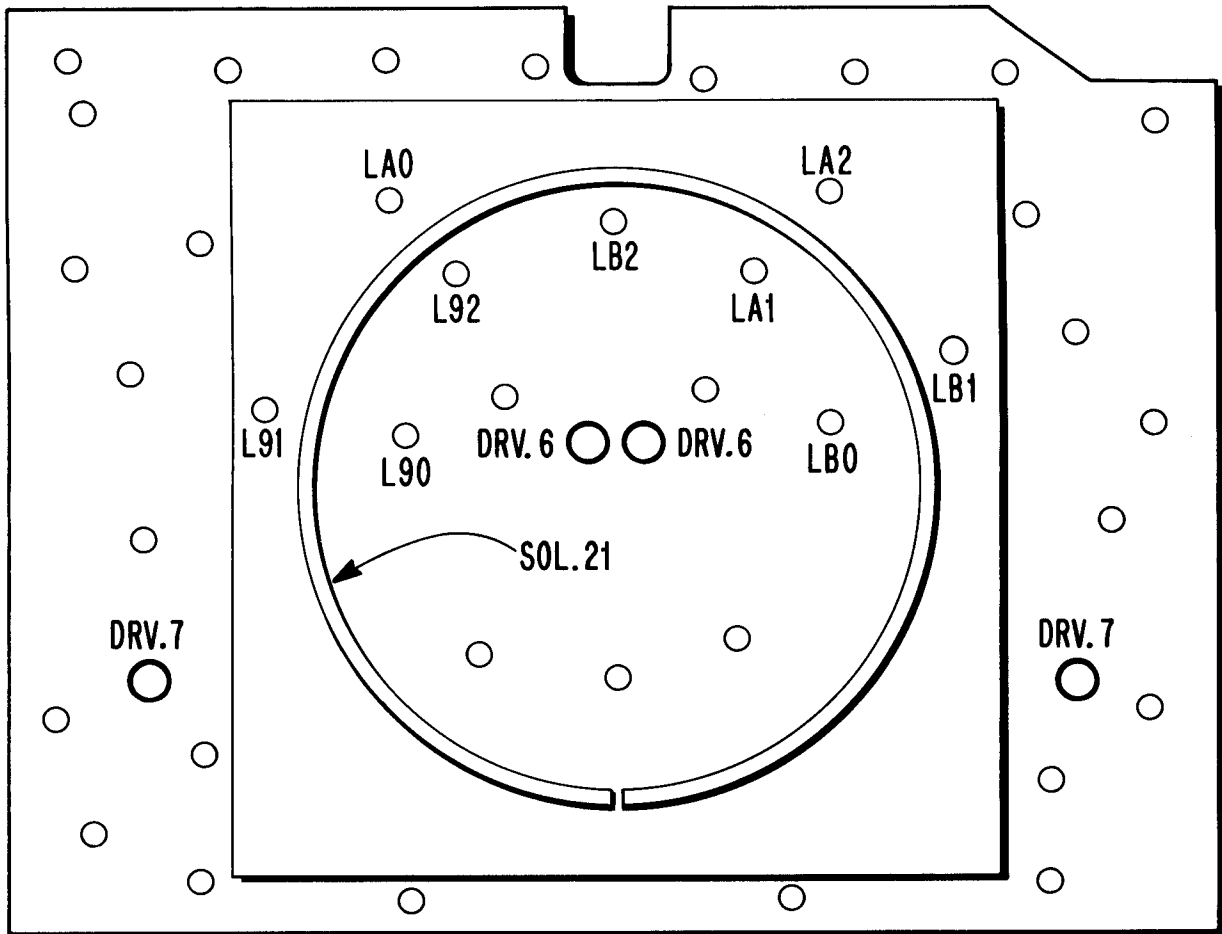

NOTE:

DRIVER LAMPS ARE TYPE #67, WITH THE EXCEPTION OF THE ROPE LIGHT ASSEMBLY PART NO. 30709 (SOL.21), ALL OTHER LAMPS ARE TYPE #44.

VII. PARTS INFORMATION

UNIQUE PARTS

The following denotes new parts and assemblies unique to STARGATE, GAME #742. Part numbers prefixed with an asterisk (*) will be illustrated or can be located on pages 28 thru 81. Numbers in parenthesis () indicates multiple quantities.

PLAYBOARD

ITEM/DESCRIPTION	PART NO.
SWITCH ASSEMBLY	*30726
PIVOT UNIT AND TARGET ASSEMBLY (2)	*30728
MYLAR OVERLAY	*30739
PLASTIC SHIELD SET, #1-742	*30751
(INCLUDES ASSEMBLIES 30751-A THRU 30751-I)	
SPACESHIP AND BRACKET ASSEMBLY	*31108
MOTOR AND SUPPORT ASSEMBLY (GLIDER, SCISSORS).....	*31121
MOTOR AND SUPPORT ASSEMBLY (GLIDER, OSCILLATING).....	*31122
WIREFORM RAMP	*31157
WIREFORM RAMP	*31159
WIREFORM RAMP	*31160
WIREFORM RAMP	*31161
MOLDED RAMPS AND BRACKET ASSEMBLY	*31166
CARDHOLDER AND FENCE ASSEMBLY	*31173
UPKICKER SCOOP AND SHIELD ASSEMBLY	*31180
UPKICKER SCOOP AND SHIELD ASSEMBLY	*31182
END OF STROKE SWITCH ASSEMBLY	*31185
MOLDED "MASTADGE" FIGURE	*31220
MOLDED "HORUS" FIGURE	*31221
MOLDED "ANUBIS" FIGURE	*31222
END OF STROKE SWITCH ASSEMBLY	*31232
METAL RAMP AND OPTO ASSEMBLY	*31235
PYRAMID AND MECHANICAL ASSEMBLY	*31239
RAMP FLAP (MEDIUM)	*31242
WIREFORM RAMP AND PEM STUDS ASSEMBLY	*31244
TARGET DECAL	*31248
TARGET DECAL (2)	*31249
TARGET DECAL	*31250
METAL RAMP AND FLAP ASSEMBLY	*31251
DROP TARGET DECAL (5)	*31253
ROLLOVER DROP TARGET DECAL	*31254
SPACESHIP SUPPORT PLATE BRACKET (2)	*31259
COIL AND DIODE ASSEMBLY (4)	*31272
PIVOT POST MECHANISM ASSEMBLY	*31287
PLASTIC SHIELD SET, #2-742	*31293
SPACESHIP SUPPORT ASSEMBLY	*31308
DROP TARGET ASSEMBLY (3 BANK)	*MA-2106
KICKING TARGET ASSEMBLY (3)	*MA-2107
DROP TARGET ASSEMBLY (2 BANK)	*MA-2042

CABINET

CABINET SCREENED	*30738-742
------------------------	------------

LIGHTBOX

SPEAKER PANEL, PLEXI-SCREENED	28827-742
STYRENE, BACKGLASS ART	28833-742
LIGHTBOX SCREENED	30708-742
LIGHTBOX INSERT ASSEMBLY	*MA-2038


BASIC TROUBLESHOOTING GUIDE

CONDITION	POSSIBLE CAUSE
Game does not power up	* Line fuse (F1) blown * Primary fuse (F2) blown
Game does not power up but general illumination lamps light	* Power supply fuse (F5) blown
SWITCH SHORT message appears in display on power up	* Check for a voltage >0v shorted to switch return number shown in display * Bad Control Board (A1) * Bad Driver Board (A3)
Lightbox illumination lamps do not light	* Fuse (F8) blown
Playfield illumination lamps do not light	* Fuse (F9) blown
All controlled lamps, flash lamps, relays, and switches not working	* Fuse (F6) blown * Bad Driver Board (A3)
All controlled lamps work but some switches do not work	* Bad diode associated with the switch (contact point type switch only)
Some controlled lamps and some switches do not work	* Short circuit on associated strobe line on playfield * Bad Driver Board (A3)
Display not working (blank) but LED on Dot Matrix Controller Board (A8) is flashing	* Display fuse (F3) or (F4) blown * Bad Dot Matrix Display Board (A4) * Bad Display Controller Board (A8)
Display not working and LED on Control Board is flickering rapidly	* Bad Dot Matrix Controller Board (A8) * Bad Control Board (A1)
Display not working and LED on Dot Matrix Controller Board (A8) is glowing bright to dim	* Bad Dot Matrix Controller Board (A8)
A solenoid operated device does not work. (Pop Bumper, Kicker, etc.)	* Associated fuse on playfield is blown * Bad Driver Board (A3)
All flippers and solenoids do not work	* Solenoid fuse (F7) blown
A flipper coil overheats and burns or fuse keeps blowing	* End of stroke switch on flipper unit not opening when the flipper button is held in. * Shorted capacitor on flipper unit
Flipper chatters when flipper button is held in	* Open hold winding (small diameter wire) on flipper coil
No sound or speech	* Bad Auxiliary Power Supply fuse (F10 or F11) * Bad Auxiliary Power Supply Board (A5) * Bad Auxiliary Sound Board (A20) * Bad Sound Board (A6)
Some sounds or speech missing	* Bad Auxiliary Sound Board (A20) * Bad Sound Board (A6)
An optical switch does not work or works intermittently	* Misalignment of LED transmitter to receiver * Bad LED transmitter and/or receiver * Bad Optical Interface Board (A25)

IMPORTANT NOTICE

THIS SHIPMENT HAS BEEN CAREFULLY INSPECTED AND
PROPERLY PACKED BEFORE LEAVING THE FACTORY.

WE CANNOT ASSUME RESPONSIBILITY FOR BREAKAGE
THAT MAY OCCUR IN TRANSPORTATION. IF THIS SHIPMENT IS
DAMAGED IN ANY WAY, IMMEDIATELY NOTIFY THE CARRIER AND
FILE DAMAGE REPORT SO THAT A SATISFACTORY ADJUSTMENT
CAN BE MADE BY THEM.

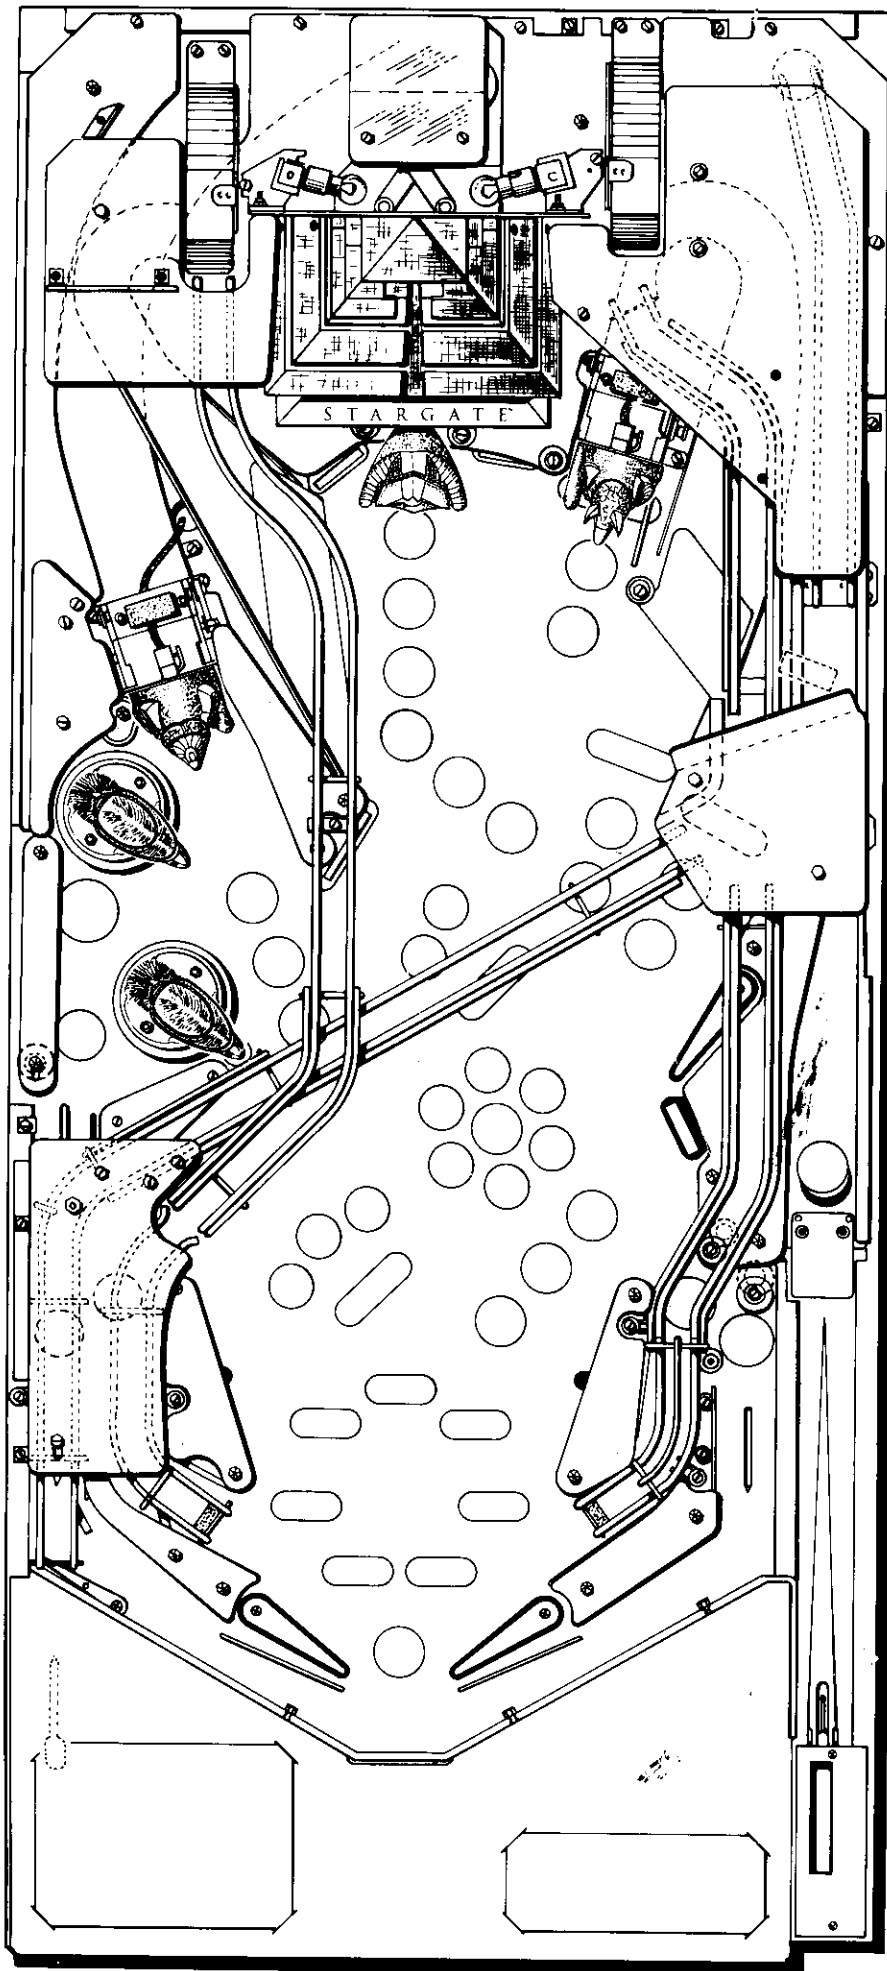

Premier[®] **Technology**

759 INDUSTRIAL DRIVE
BENSENVILLE, IL 60106

1-708-350-0400

FAX: 1-708-350-1097

THE PREMIER HOTLINE
1-800-444-0761